


Note: Only GWN7700MP supports 4 PoE ports.



For Certification, Warranty and RMA information, please visit: www.grandstream.com

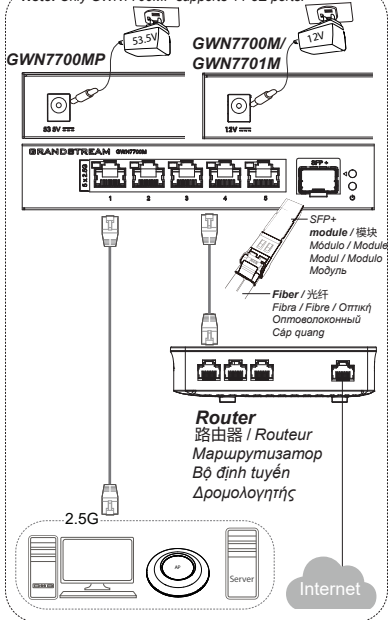

GWN7700M(P) & GWN7701M

5&8 Unmanaged 2.5G Multi-Gigabit
Port and 1 SFP+ Port Switch

Quick Installation Guide

Grandstream Networks, Inc.

126 Brookline Ave, 3rd Floor
Boston, MA 02215. USA
Tel : +1 (617) 566 - 9300

www.grandstream.com

EN Operating Temperature: 0 to 40 °C (32 to 104 °F)
Storage Temperature: -20 to 60 °C (-4 to 140 °F)
Operating Humidity: 10% to 90% Non-condensing
Storage Humidity: 10% to 90% Non-condensing
Power Adapter: Output: GWN7700M/7701M: +12VDC, 1A
GWN7700MP: 53.5DC, 1.22A
Ethernet Port: 100/1000/2500Mbps RJ-45 port
SFP+ Port

ZH 操作温度: 0至40° C(32至104° F)
存储温度: -20至60° C(-4至140° F)
工作湿度: 10% ~ 90%不凝结
存储湿度: 10% ~ 90%不凝结
电源适配器: 输出: GWN7700M/7701M: +12VDC, 1A
GWN7700MP: 53.5VDC, 1.22A
以太网接口: 100/1000/2500 Mbps RJ-45
SFP+ 端口

ES Temperatura (funcionamiento): 0 a 40 °C (32 a 104 °F)
Temperatura (almacenamiento): -20 a 60 °C (-4 a 140 °F)
Humedad de funcionamiento: 10% a 90% sin condensación
Humedad de almacenamiento: 10% a 90% sin condensación
Adaptador: Salida: GWN7700M/7701M: +12 VDC, 1 A
GWN7700MP: 53,5 VDC, 1,22 A
Puerto Ethernet: puerto RJ-45 de 100/1000/2500Mbps
Puerto SFP+

FR Température (Fonctionnement): 0 à 40 °C (32 à 104 °F).
Température (Stockage): -20 à 60 °C (-4 à 140 °F).
Humidité (Fonctionnement): 10 % à 90 % sans condensation.
Humidité (Stockage): 10 % à 90 % sans condensation.
Adaptateur: Sortie : GWN7700M/7701M: 12CC, 1 A
GWN7700MP: 53,5CC, 1,22 A
Port Ethernet: port RJ45 100/1000/2500 Mbps.
Port SFP+

PT Temperatura (operação): 0 a 40 °C (32 a 104 °F)
Temperatura (armazenamento): -20 a 60 °C (-4 a 140 °F)
Umidade operacional: 10% a 90% Sem condensação
Umidade de armazenamento: 10% a 90% sem condensação
Adaptador: Saída: GWN7700M/7701M: +12VDC, 1A
GWN7700MP: +53,5VDC, 1,22A
Porta Ethernet: porta RJ-45 de 100/1000/2500Mbps
Porta SFP+

VI Nhiệt độ hoạt động: 0 đến 40 °C (32 đến 104 °F)
Nhiệt độ bảo quản: -40 đến 70 °C (-4 đến 140 °F)
Độ ẩm hoạt động: 10% đến 90% Không ngưng tụ
Độ ẩm bảo quản: 10% đến 90% Không ngưng tụ
Nguồn cấp (adapter) đầu ra: GWN7700M/7701M: +12VDC, 1A
GWN7700MP: +53,5VDC, 1,22A
Cổng mạng RJ-45: 100/1000/2500Mbps.
Cổng mạng SFP+

IT Temperatura di esercizio: da 0 a 40 °C (da 32 a 104 °F)
Temperatura di stoccaggio: da -20 a 60 °C (da -4 a 140 °F)
Umidità di esercizio: da 10% a 90% senza condensa
Umidità di stoccaggio: da 10% a 90% senza condensa
Alimentatore: Uscita: GWN7700M/7701M: +12 V CC, 1 A
GWN7700MP: +53,5 V CC, 1,22 A
Porta Ethernet: RJ-45 100/1000/2500Mbps
Porta SFP+

DE Betriebstemperatur: 0°C bis 40°C
Lagertemperatur: -20°C bis 60°C
Luftfeuchte Betrieb: 10% bis 90% nicht-kondensierend
Luftfeuchte Lagerung: 10% bis 90% nicht-kondensierend
Steckernetzteil: Ausgabe GWN7700M/7701M: +12VDC, 1 A
GWN7700MP: +53,5 VDC, 1,22 A
Ethernet-Port: 100/1000/2500Mbps RJ-45 port
SFP+ Port

EL Επίπεδο θερμοκρασίας κατά τη λειτουργία: 0 έως 40 °C (32 έως 104 °F)
Επίπεδο θερμοκρασίας κατά τη αποθήκευση: -20 έως 60 °C (-4 έως 140 °F)
Επίπεδο υγρασίας κατά τη λειτουργία: 10% έως 90% Μη συμπυκνωμένη
Επίπεδο υγρασίας κατά τη αποθήκευση: 10% έως 90% Μη συμπυκνωμένη
Μετασχηματιστής: Έξοδος: GWN7700M/7701M: +12VDC, 1A
GWN7700MP: +53,5VDC, 1,22A
Θύρα Ethernet: Θύρα RJ-45 100/1000/2500Mbps
Θύρα SFP+

RU Рабочая температура: от 0 до 40 °C (от 32 до 104 °F)
Температура хранения: от -20 до 60 °C (от -4 до 140 °F)
Рабочая влажность: от 10% до 90% без конденсации
Влажность хранения: от 10% до 90% без конденсации
Адаптер: Выход: GWN7700M/7701M: +12 В постоянного тока, 1 А
GWN7700MP: +53,5 В постоянного тока, 1,22 А
Порт Ethernet: RJ-45 100/1000/2500 Мбит/с
Порт SFP+

Certification Regulatory Information

U.S. FCC Part 15 Regulatory Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Canada Regulatory Information

CAN ICES-003 (B)/NMB-003(B)

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.
Le présent produit est conforme aux sp cifications techniques applicables d'Innovation, Sciences et Développement économique Canada.