

GDMS Unified Communications – User Guide

Thank you for using Grandstream Device Management System! GDMS Unified Communications is a cloud-based solution that provides the ability to easily manage Grandstream products before, during, and after deployment. GDMS Unified Communications separates systems independently based on different product lines: Unified Communication solution and the Networking solution.

PRODUCT OVERVIEW

Feature Highlights

- Intuitive deployment and management: GDMS’s easy-to-navigate web portal and batch operation support allow users to easily deploy and manage Grandstream devices located on several sites.
- All-in-one solution: GDMS offers a complete package that offers convenient management of devices and SIP server accounts on multiple sites, real-time monitoring and alerts, task scheduling and tracking, and device diagnostics.
- Supports presetting offline devices.
- Diagnostic tools: Easily collect system logs, network captures, ping and traceroute information remotely from the devices using GDMS user interface without having to be located in proximity of the devices.
- Supports IPPBX devices’ remote management and synchronizes SIP accounts to the GDMS platform in real-time. All devices/SIP account one-stop management.
- Supports value-added services – IPPBX Remote Management Plan in GDMS platform. Supports remote external network communication for IPPBX clients.
- Supports value-added services – Cloud Storage Space in GDMS platform. IPPBX users can store more data safely thanks to encrypted storage and reinforced authentication procedure.
- Channel customer support: Allows automatic association of Grandstream ERP devices, allowing for the establishment of channel relationships and quick device allocation.
- Powerful API integration features: GDMS is compatible with ERP/CRM/OA platforms to improve workflow efficiency.

GDMS Technical Specifications

Functions	● VoIP Device Management ● PBX Device Management ● Account Management ● Device Configuration ● Firmware Upgrade ● Device Monitoring ● Intelligent Alarm ● Statistical Analysis ● Channel Management ● Task Management ● PBX Backup ● Plan & Service
Security and Authentication	● HTTPS protocol and two-way certificate verification to ensure data security between devices and GDMS. ● The key information of devices is encrypted and stored so that the key information cannot be obtained from the data storage. ● The account password is encrypted and stored with sha256 algorithm to ensure the security of the account. ● Serial number authentication of devices to ensure private rights of devices. ● The privileges of the sub-users can be managed on the GDMS platform. ● Support Multi-Factor Authentication.

Enterprise Features	• No limitations on the number of devices and SIP accounts that can be managed. • Configuration of all supported device parameters is supported, including but not limited to account settings, phone settings, network settings, system settings, maintenance, applications, profiles, and handsets. • Management of sites, group templates, and model templates.
Supported Device Models	• GXP Series (GXP21xx only) • GXV Series (GXV3370, GXV3380, GXV3350, GXV3450, GXV3470, GXV3480) • GRP Series • GHP Series (GHP610, GHP611, GHP620, GHP621, GHP63x(W)) • DP Series • WP Series • GVC Series (GVC3210 and GVC3220) • GWN Series • UCM6300 and UCM6300A Series • CloudUCM • GCC Series • SoftwareUCM • GCC Series • HT Series • GXW42xx V2 Series • GXW45xx Series • GSC36xx Series • GDS Series • GSC357x Series • GSC35xx Series (GSC3505, GSC3506, GSC3506 v2, GSC3510, GSC3516)

GDMS Technical Specifications


GETTING STARTED

GDMS Overview

Main Functions Overview


For different solutions, the user can select to use one of the systems in the GDMS platform. Each system is in charge of managing and monitoring a line of products that belong to one solution.

- **GDMS Networking:** This system manages the networking products offered by Grandstream. This line of products consists of routers, switches, access points, etc...
- **GDMS Unified Communications:** This system manages the Unified Communication products offered by Grandstream, like IPPBX appliances, cloud IPPBXs, IP phones, facility management devices, conferencing devices, etc...

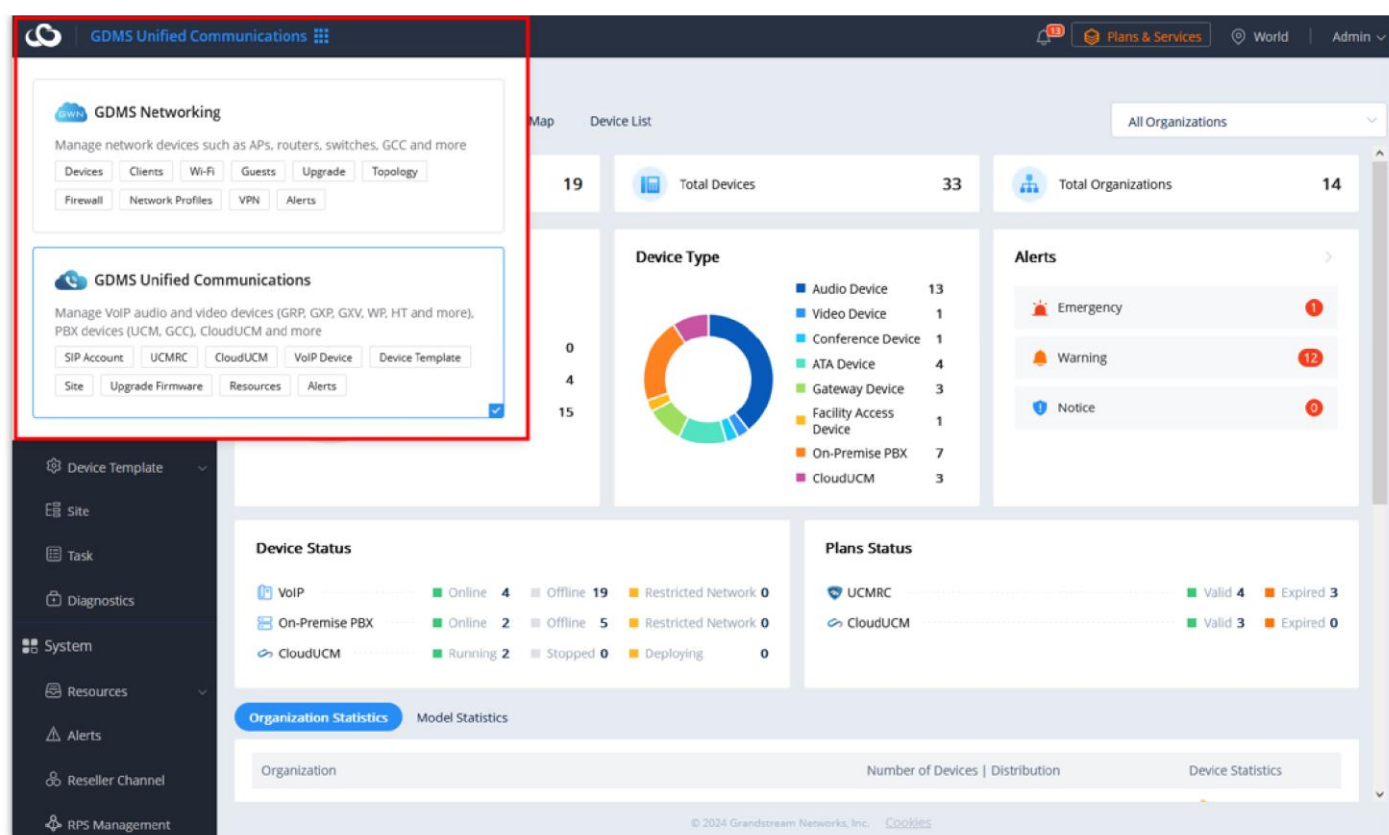

Select a System

The user can access the modules listed in each category to jump quickly to the intended destination. See the example below for the GDMS Unified Communications system.

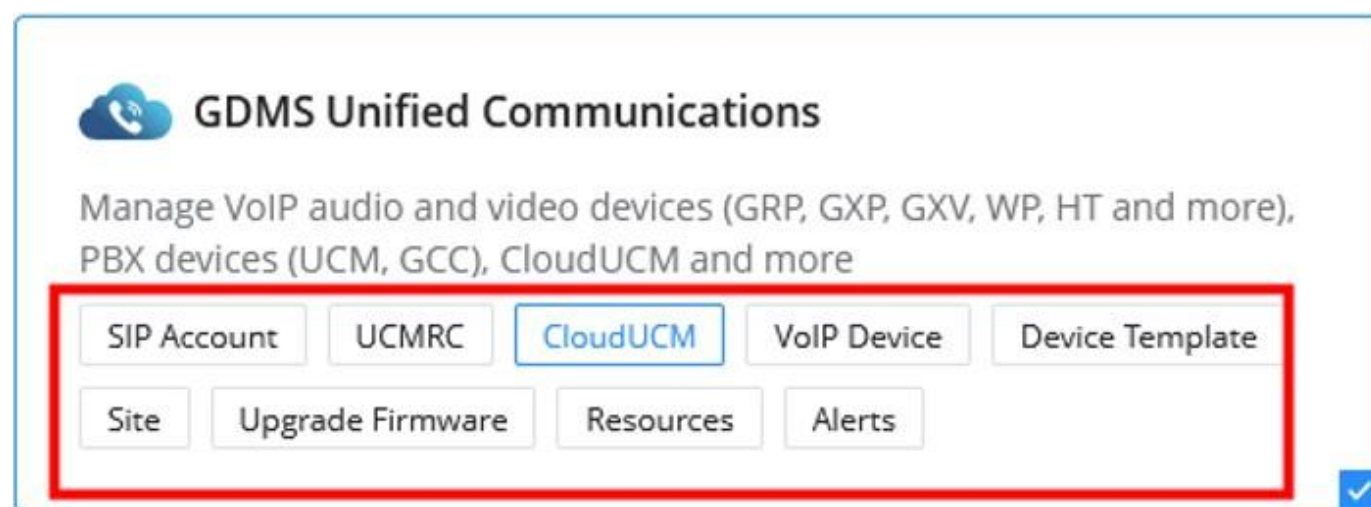

GDMS Unified Communications Module

Import Devices and Management

Users need to import the devices into the GDMS platform first to view the status and configuration of the devices and monitor the devices on the GDMS platform.

Channel vendors could acquire devices directly through ERP, and the channel vendors need to submit relevant certificates to Grandstream customer support.

Import SIP Accounts and Allocate to Devices

Users could import a batch of SIP accounts with Excel files, and allocate the batch of SIP accounts to devices. Users could complete all account configurations for all devices by importing a batch of SIP accounts to a batch of devices.

Configure Devices

- Configure devices by model: Once the device is associated with the GDMS platform, the device will be allocated with the configuration parameters according to the device model and located site.
- Configure devices by group: Manage the devices by certain rules and groups, and the GDMS supports pushing configuration files to all devices under a group.
- Configure a single device: Modify a specific device configuration in the Device list directly.
- Configure devices by configuration file: Users can upload the configuration file of the device into the GDMS platform directly.

Firmware Upgrade

GDMS platform supports upgrading a batch of devices' firmware by device model, site, firmware version range, and other conditions. It also supports upgrading the devices' firmware by a batch of MAC addresses of the devices.

Schedule Tasks

Users could schedule certain tasks for a certain period of time. For example, users could schedule firmware upgrade tasks and execute the task in the early morning, so that the task will not affect the device owners.

Alarm Message and Diagnostic

In case of malfunction or dangerous operation of the devices, the administrator will be alerted. The GDMS platform allows administrators to diagnose faults of some devices to locate and resolve problems quickly.


Prerequisites

- TR-069 feature needs to be enabled on the endpoints.
- Working Internet connection to access the GDMS platform.
- Endpoint devices are in the [supported device list](#) of the GDMS platform.

GDMS Account Registration

If using GDMS for the first time, an administrator will need to register for a GDMS account using the following steps:

1. Open the GDMS platform URL on the browser: <https://www.gdms.cloud>

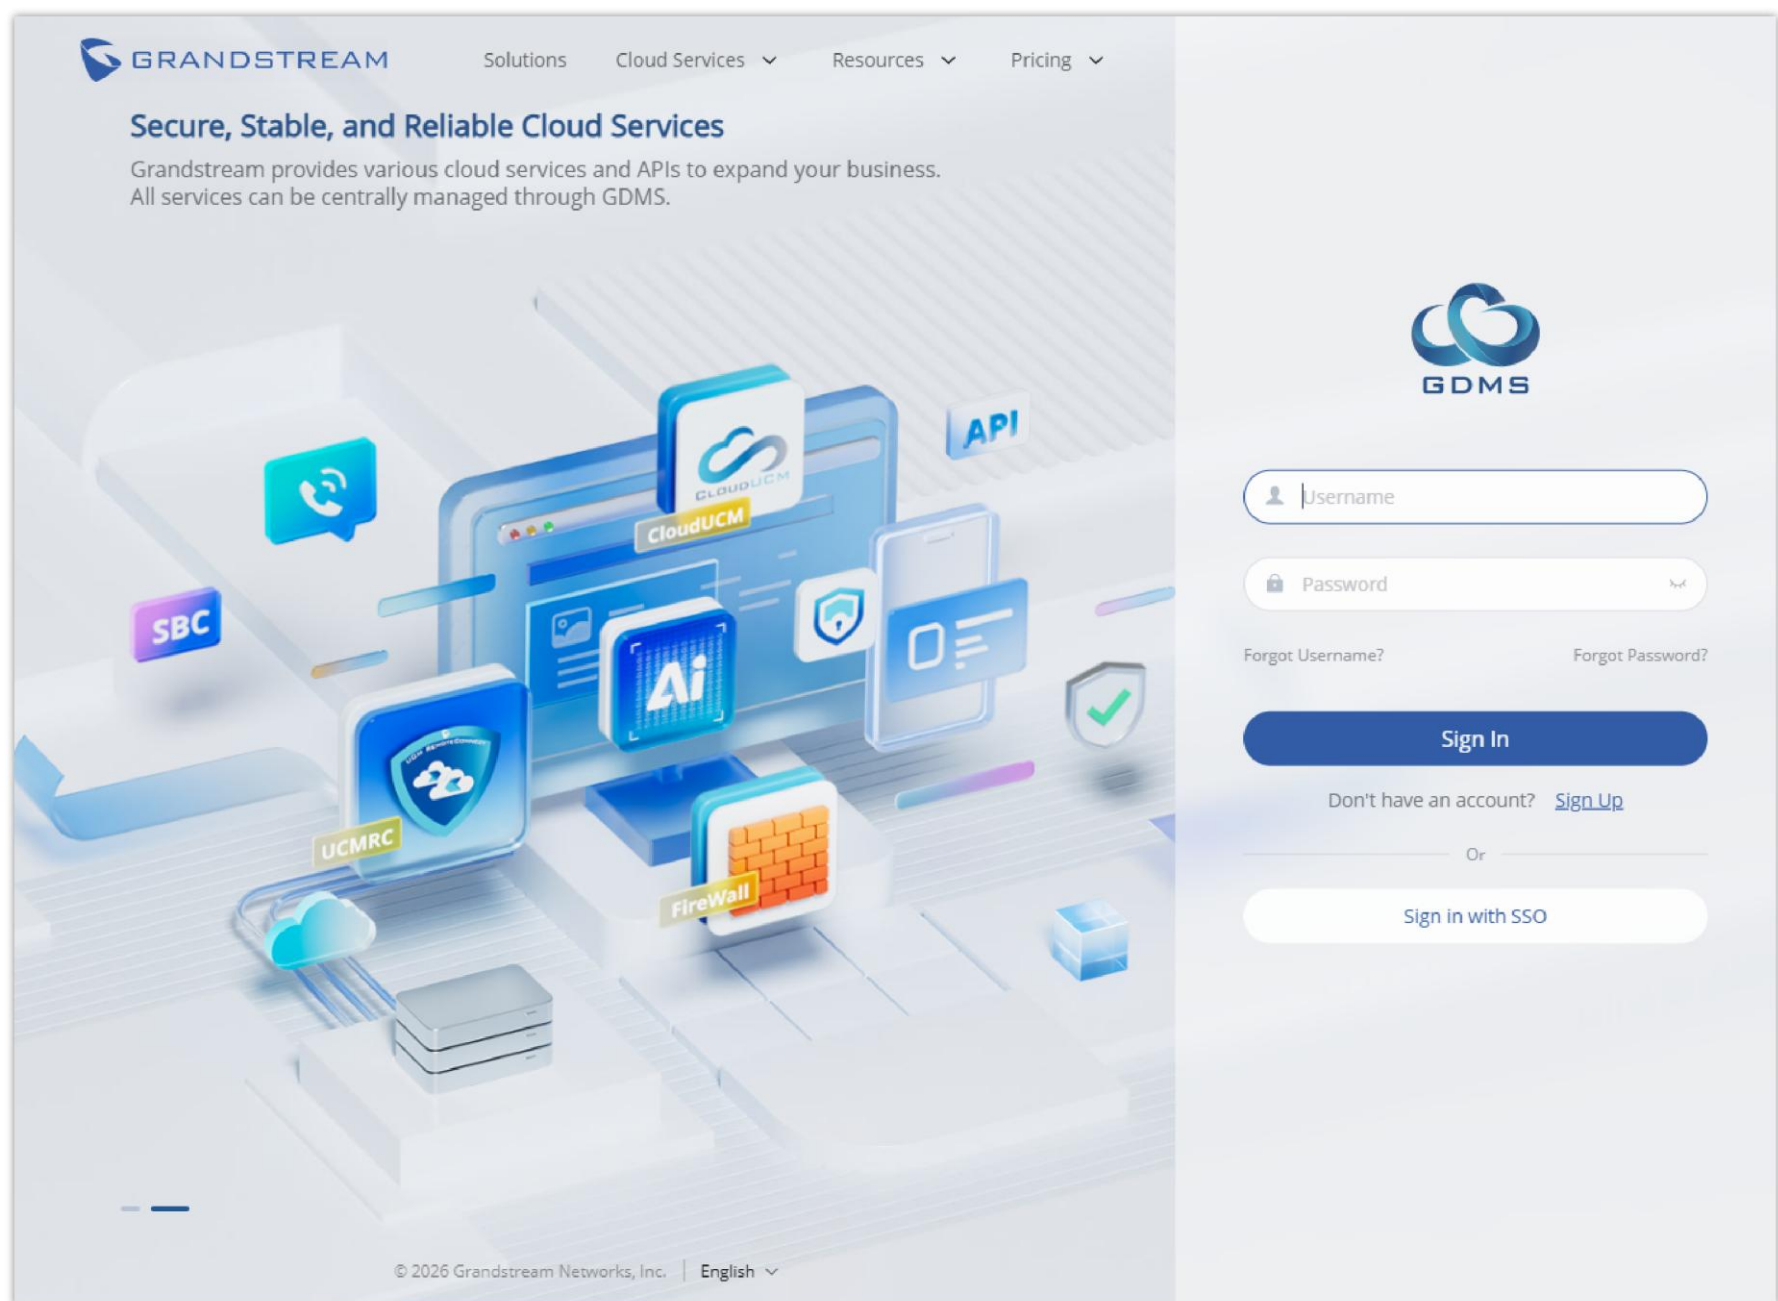

Welcome to GDMS

2. Click on the **Sign Up** option to enter the registration page, and then fill in the following information:

GDMS

Create Account

Fully manage all Grandstream devices and cloud services with one account.

Nickname

Username

Email

Bulgaria

EU (Europe Data Center)

User Type

Grandstream Device Verification

Verification code

we-mk

☐ I have read and agree to the [Privacy Policy](#) and [Terms of Service](#)

Sign Up

©2025 Grandstream Networks, Inc. | English

[Privacy Statement](#)

[Terms of Service](#)

[Cookies](#)

Register GDMS Account

Nickname	Enter the name that will be displayed in Grandstream Cloud Platform
Username	Enter a username. The username will be used to login.
Email	Enter the email. This is necessary for account activation.
Country	Select the country from the dropdown menu.
Region	Select your region, and user data will be stored in the data center of the corresponding region.
User Type	Select the user type. Enterprise Service Provider Channel Reseller System Integrator Personal User
Grandstream Device Verification	Fill in the device information you own (device purchase channel, Mac address, SN or initial password) so that the administrator can review your registration application.
Verification Code	Enter the Captcha verification code

Register GDMS Account

3. After submitting the registration application, device verification is performed in real time. Based on the verification result, the application may be immediately approved or rejected.

GDMS Account Access


Login

Once the account has been activate, the user can log into the GDMS platform using their username or email address. In case the user has used the address email to log into the GDMS and the address email is bound to multiple accounts, the user will be prompted to choose the account to use by choosing the corresponding username.

Upon first login with valid credentials, users are prompted to configure an MFA method. The available methods depend on the authentication policy set by the GDMS administrator. For more information, refer to the [GDMS MFA Device User Guide](#).

 **Note**


If the failed logging attempts exceed 5 attempts, the account will be frozen for 30 minutes. The user has to wait until the cooldown time has elapsed before attempting to log in again. If the user wishes to log in before the cooldown timer elapses, they will need to reset their password by clicking on “Forgot Password?”, and log in using the new password.

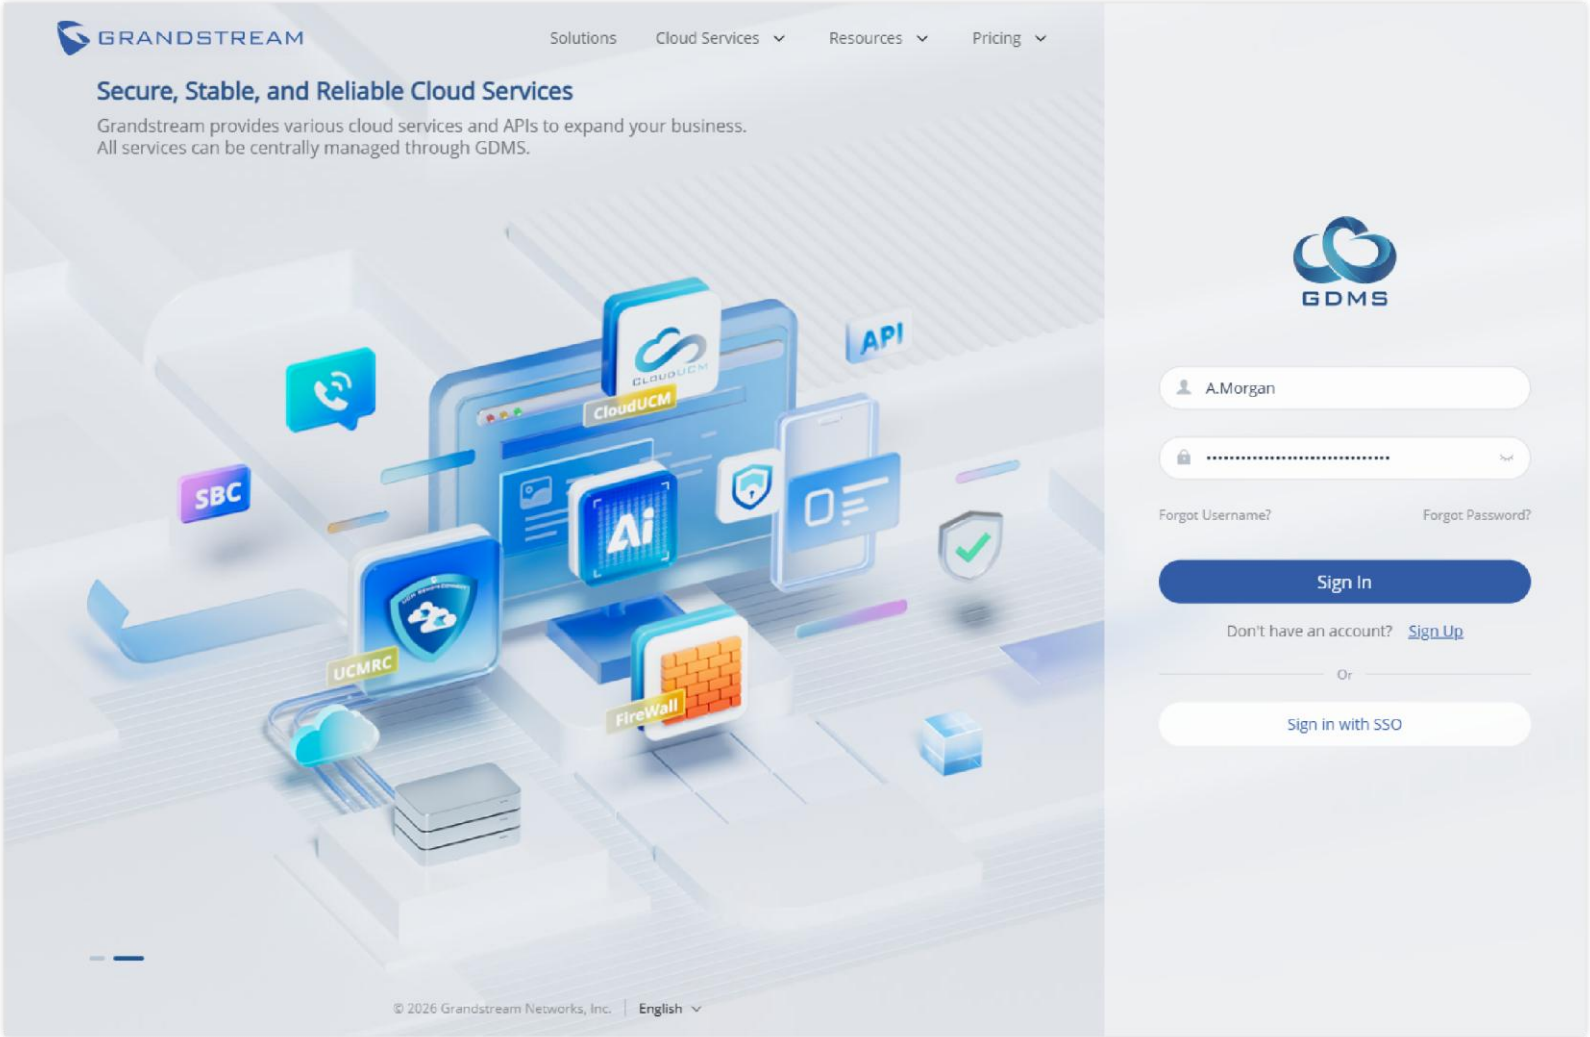


GDMS Login Page

Single Sign-On (SSO)

If the user has set to log in using SAML Single Sign-on, they can click on “Sign in with SSO” button then enter the SSO Access Code.

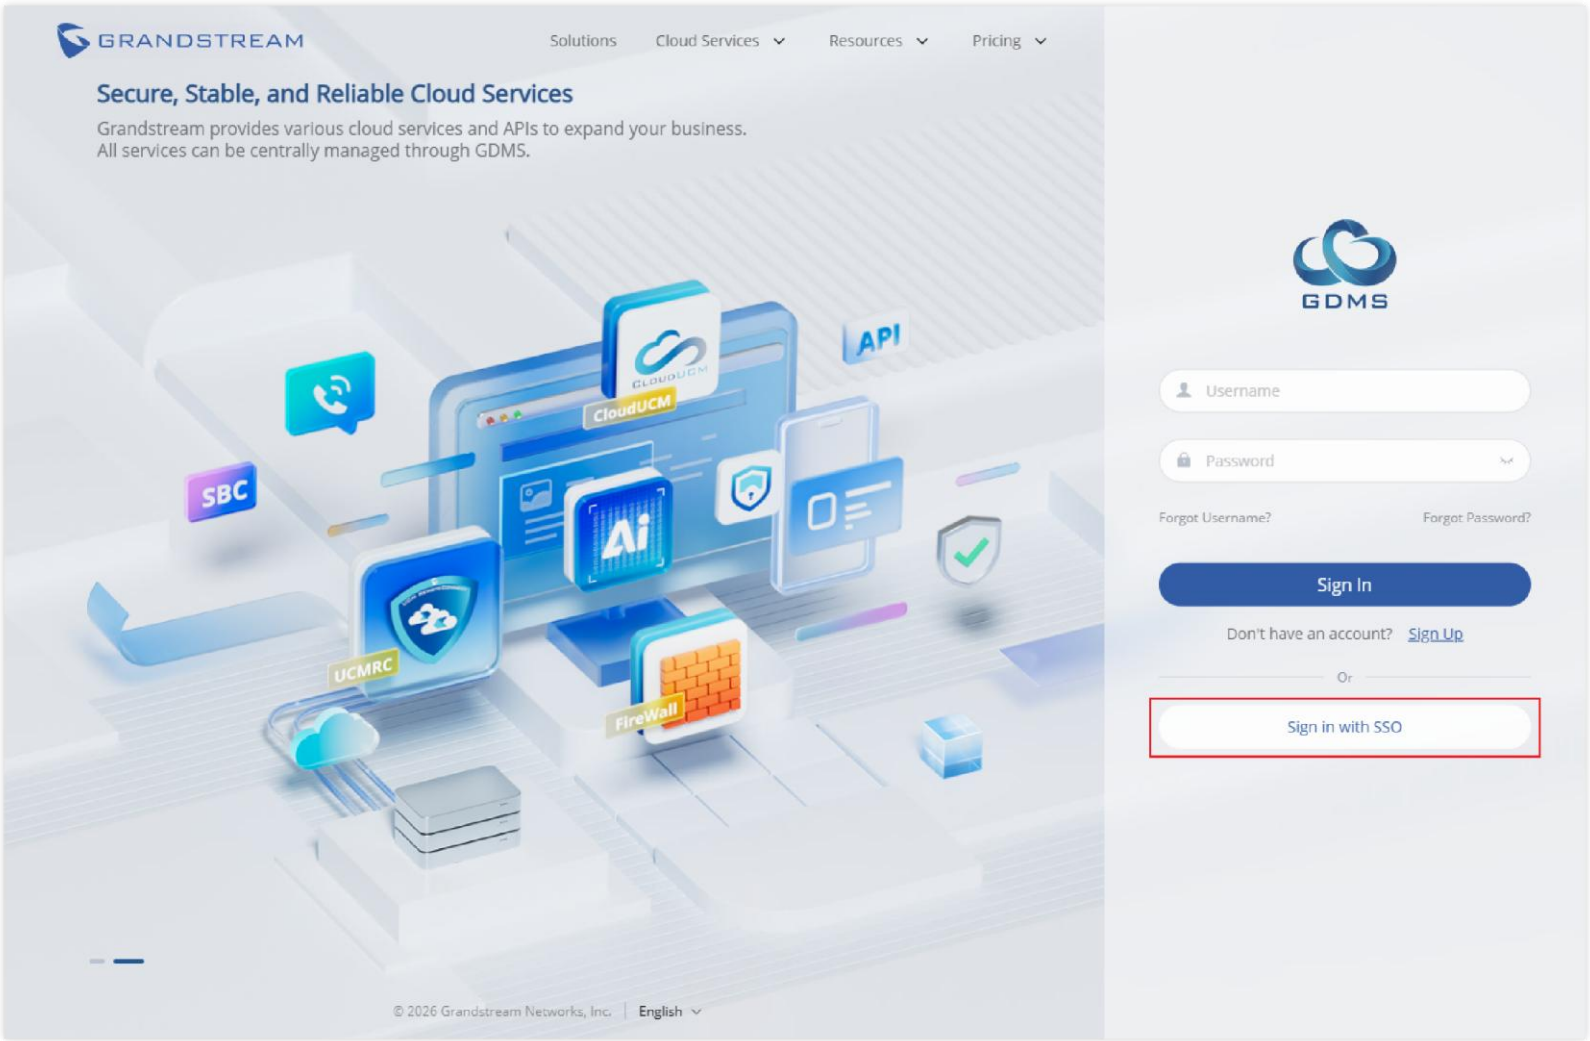

GDMS Log in Page

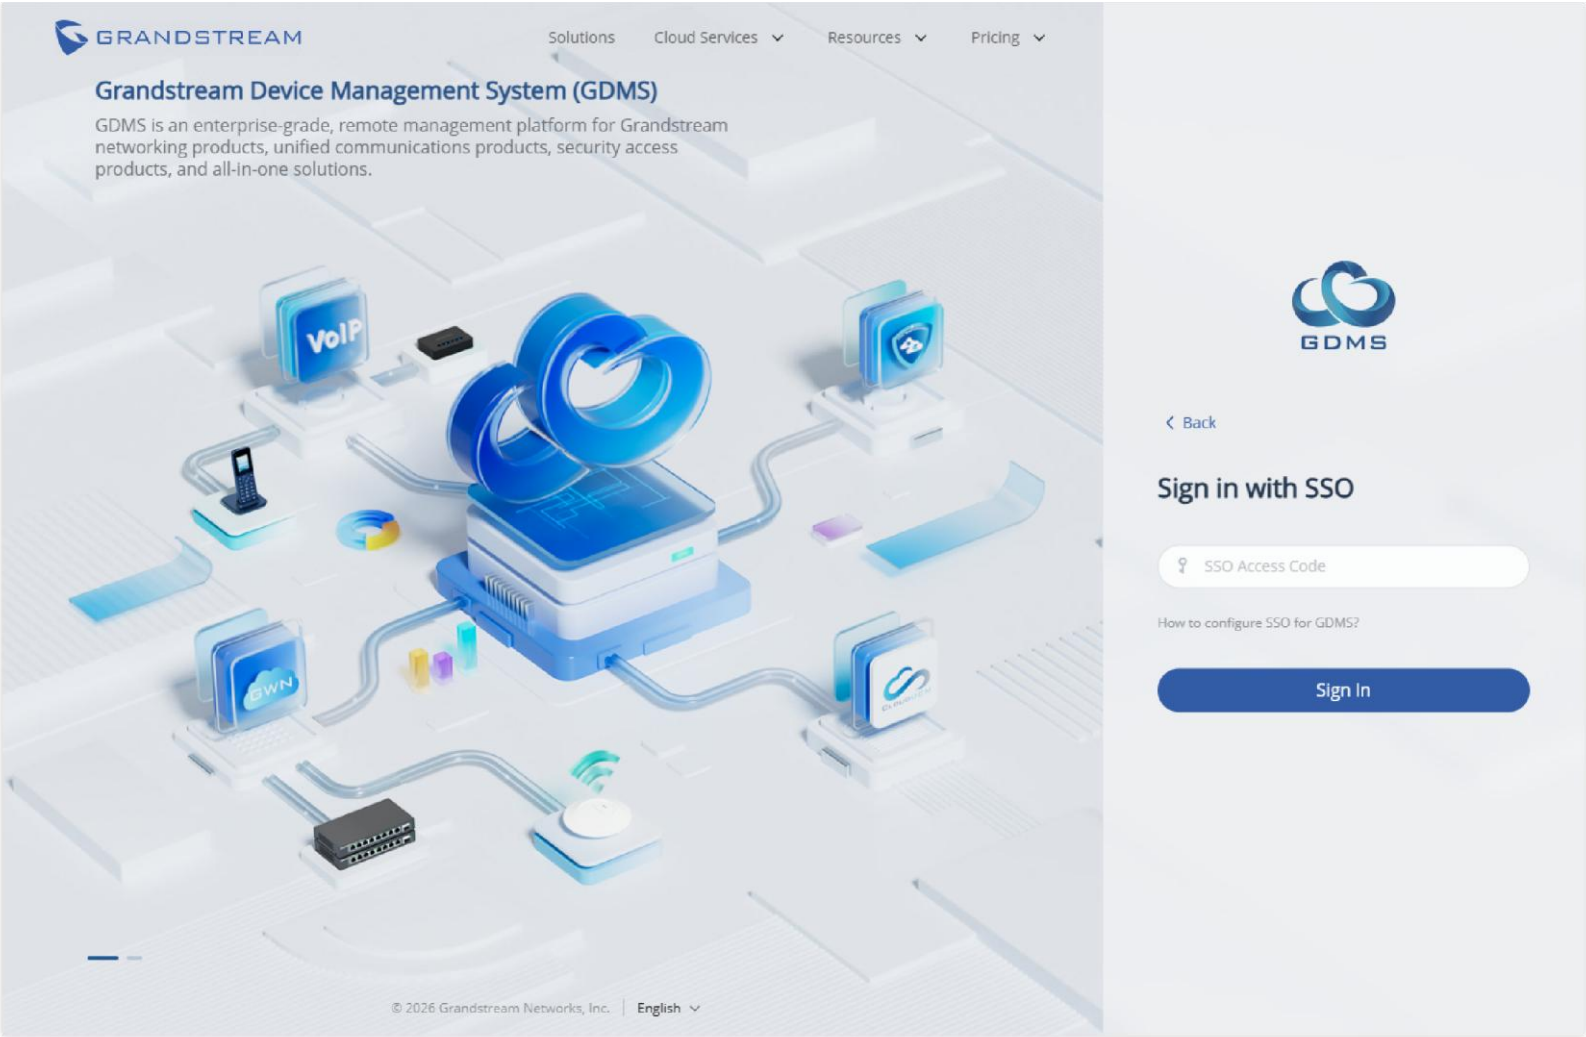


Single Sign on Log in Page

Login Auto-Lock for Inactive Users

To enhance system security and maintain account integrity, GDMS includes an Auto-Lock for Silent Users feature.

Any user account that has not signed in for more than **one year** will be automatically locked by the system. Locked users will be unable to log in until their account is reactivated.

To regain access, the user must reset their password by selecting the “**Reset Password**” option on the login page when prompted with the account security reminder.

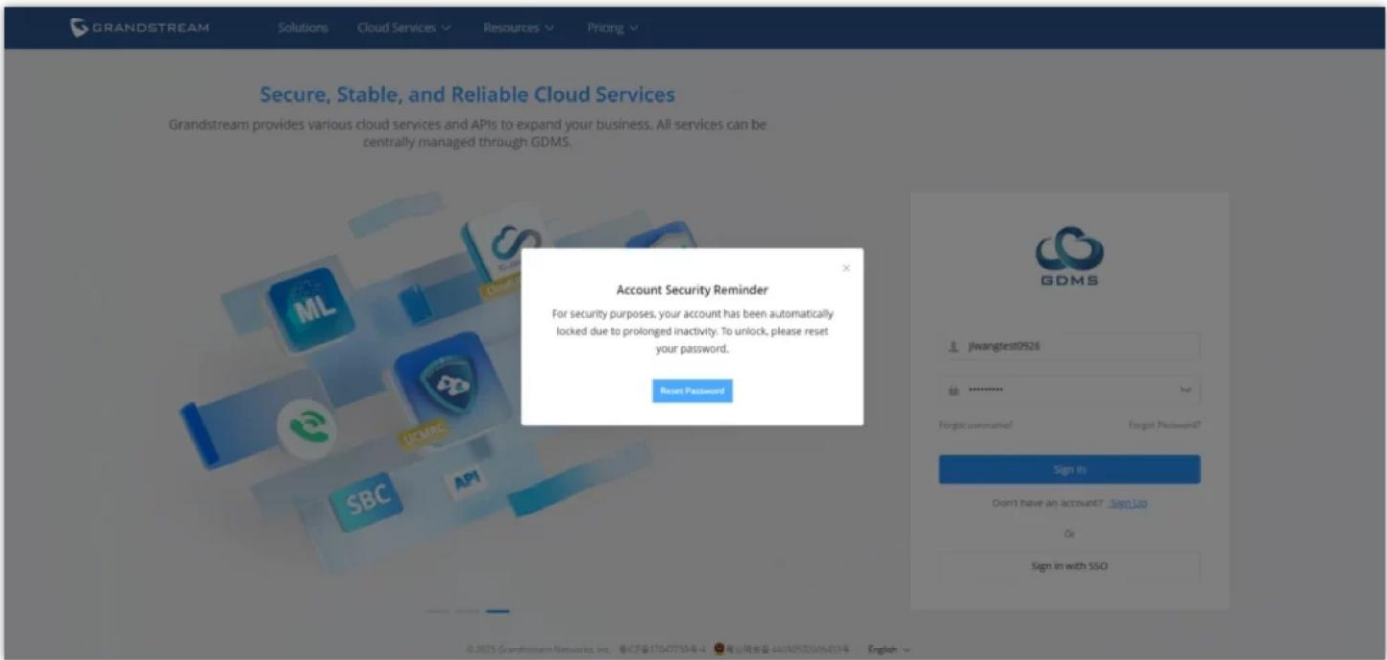

GDMS Login Pormpt for Inactive Users

Supported Devices and Requirements

The current GDMS platform version supports the following device models.

Supported Device Models	
Audio Device	● GXP21XX ● DP7XX ● GRP26XX ● WP8XX

	• GHP6XX • GSC36XX • GSC35XX
Video Device	• GXV33XX • GXV34XX
Conference Device	• GAC2570 • GSC35XX • GVC32XX
Facility Access Device	• GDS37XX • GSC3570
Video Surveillance Device	• GSC3610 • GSC3615 • GSC3620
ATA Device	• HT80X • HT81X • HT841 • HT881
Gateway Device	• GXW45XX • GXW42XX V2
PBX Device	• UCM63XX • UCM63XXA • GCC60XX • CloudUCM • SoftwareUCM

Supported Devices

Connect with GDMS

The devices must be upgraded to firmware versions that are compatible with the GDMS platform. Otherwise, the devices will not be able to connect to GDMS. When the devices connect to the Internet, and the user has added this device to the GDMS account, the device will connect to GDMS automatically.


DASHBOARD

The dashboard offers a general look and information which is represented in numbers and graphs to make it easier to read and interpret. The different information is gathered from all the organizations which are assigned to the user. Within the dashboard page, the user can access four tabs and each gives a specific type of information to the user so he/she can quickly jump between pages and view the needed information. The categories are Device Statistics, PBX Top 5, Device Geo Map, and Device List.

Device Statistics

The Device Statistics page provides an overview of the following information:

- Total Accounts
- Total Devices
- Total Sites
- Accounts Status
- Device status
- Device Type
- Site Statistics
- Model statistics

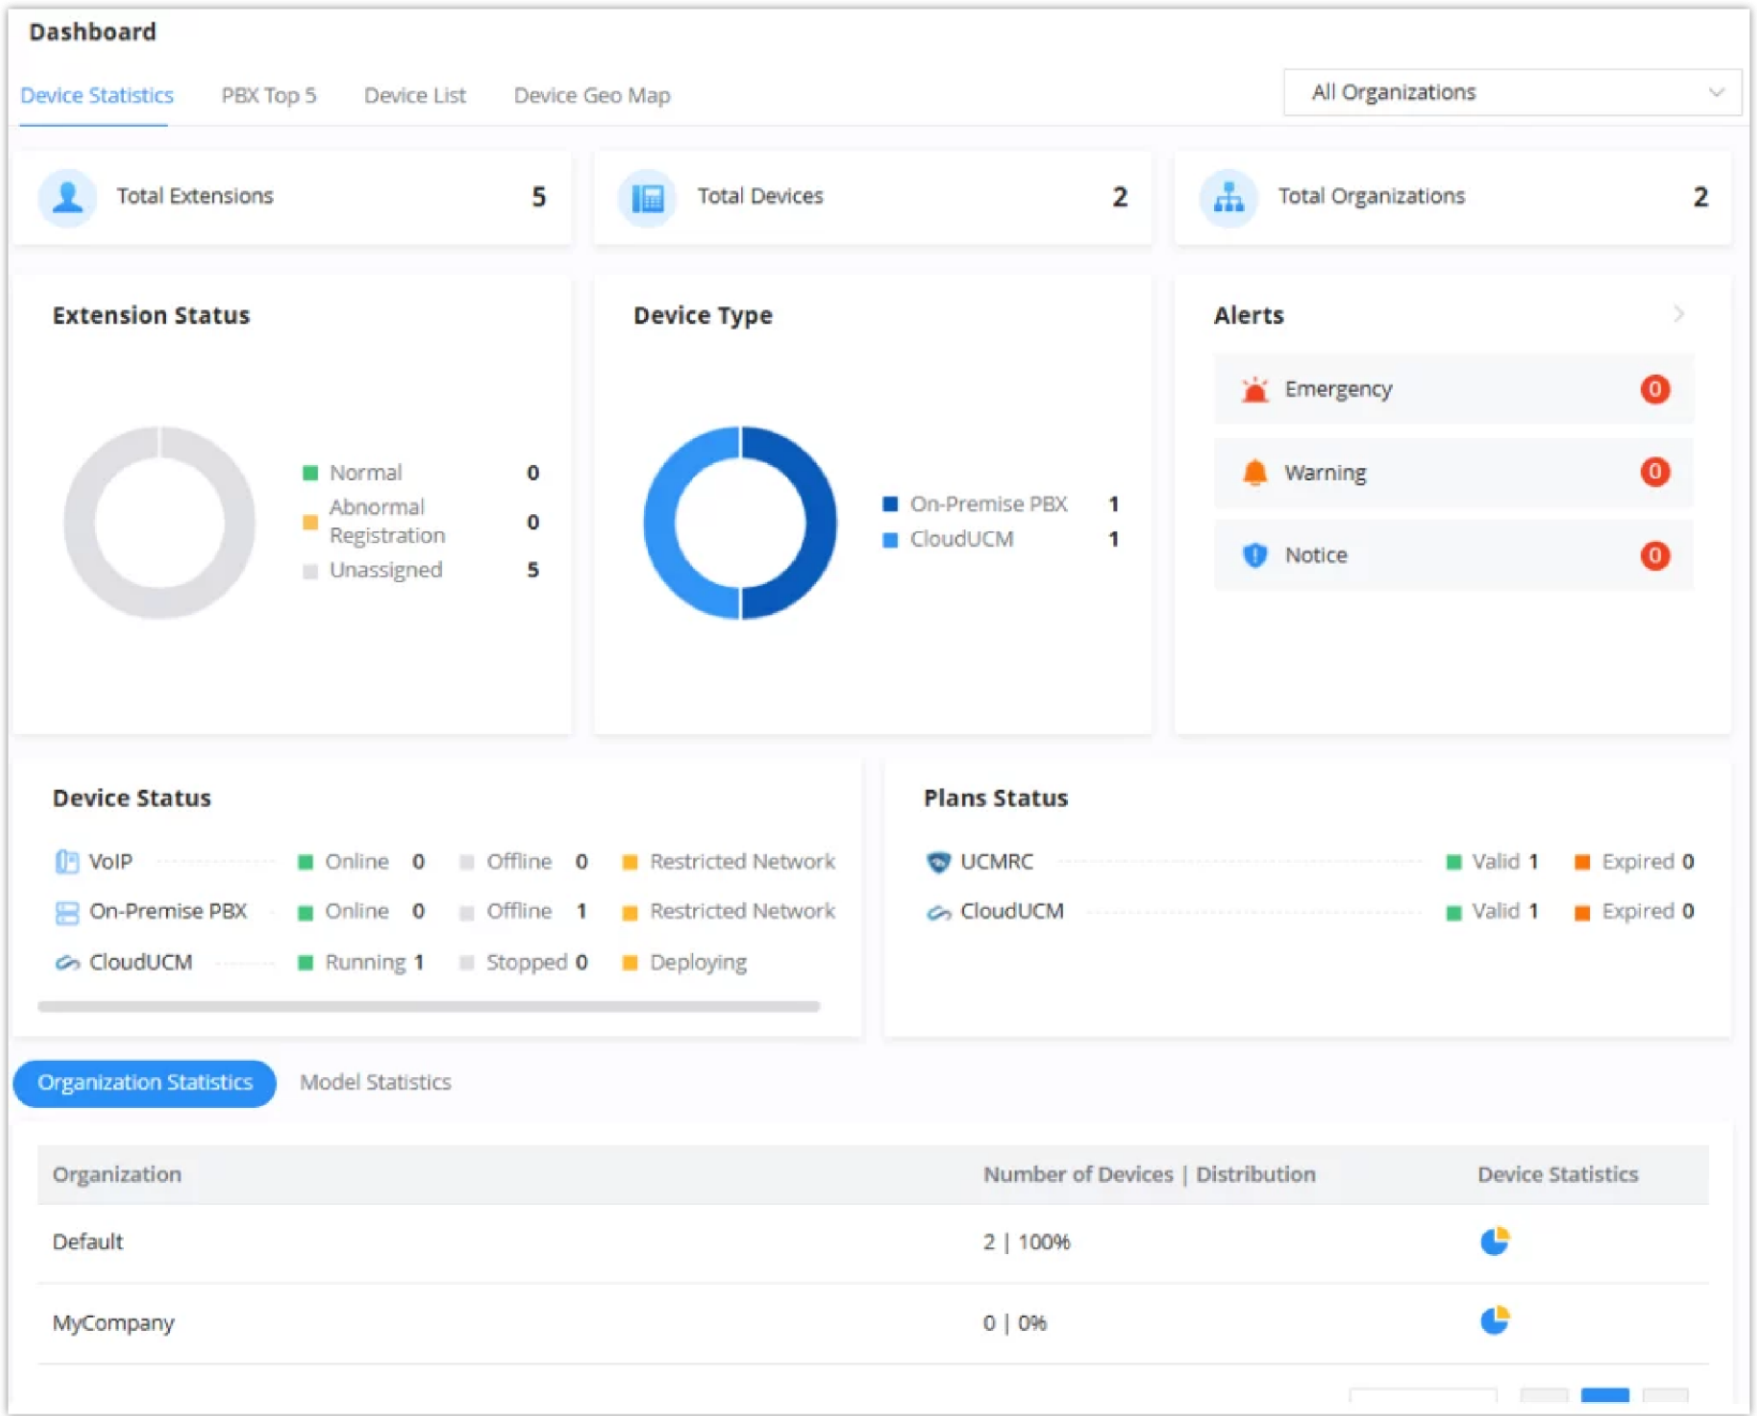


	● Offline: Device and GDMS platform lose network connection.
Device Type	Displays the total number of devices in each category: audio, video, and conferencing. ● Audio devices: GRP series, DP series, GXP series, and WP series ● Video devices: GXV series ● Conference devices: GVC series
Site Statistics	Displays the total number of devices assigned to each site and the allocation of devices per site.
Model Statistics	Displays the total number of each device model, the percentage of total devices that each model makes up, and the distribution of different firmware per model.

Site Statistics		Model Statistics	
Model	Type	Number of Devices Distribution	Version Statistics
DP750	Audio Device	2 50%	
GRP2614	Audio Device	1 25%	
GXV3370	Video Device	1 25%	
Total 3			10/page

Model Statistics

PBX Top 5

In this tab, the user can view the top 5 PBX devices per local calls, remote calls, local registrations, cloud storage space usage, local call duration, remote call duration, and remote registrations. This gives the user a comprehensive view of the top 5 PBX devices for each category, to ensure that educated decision on distributing the IP telephony resources.

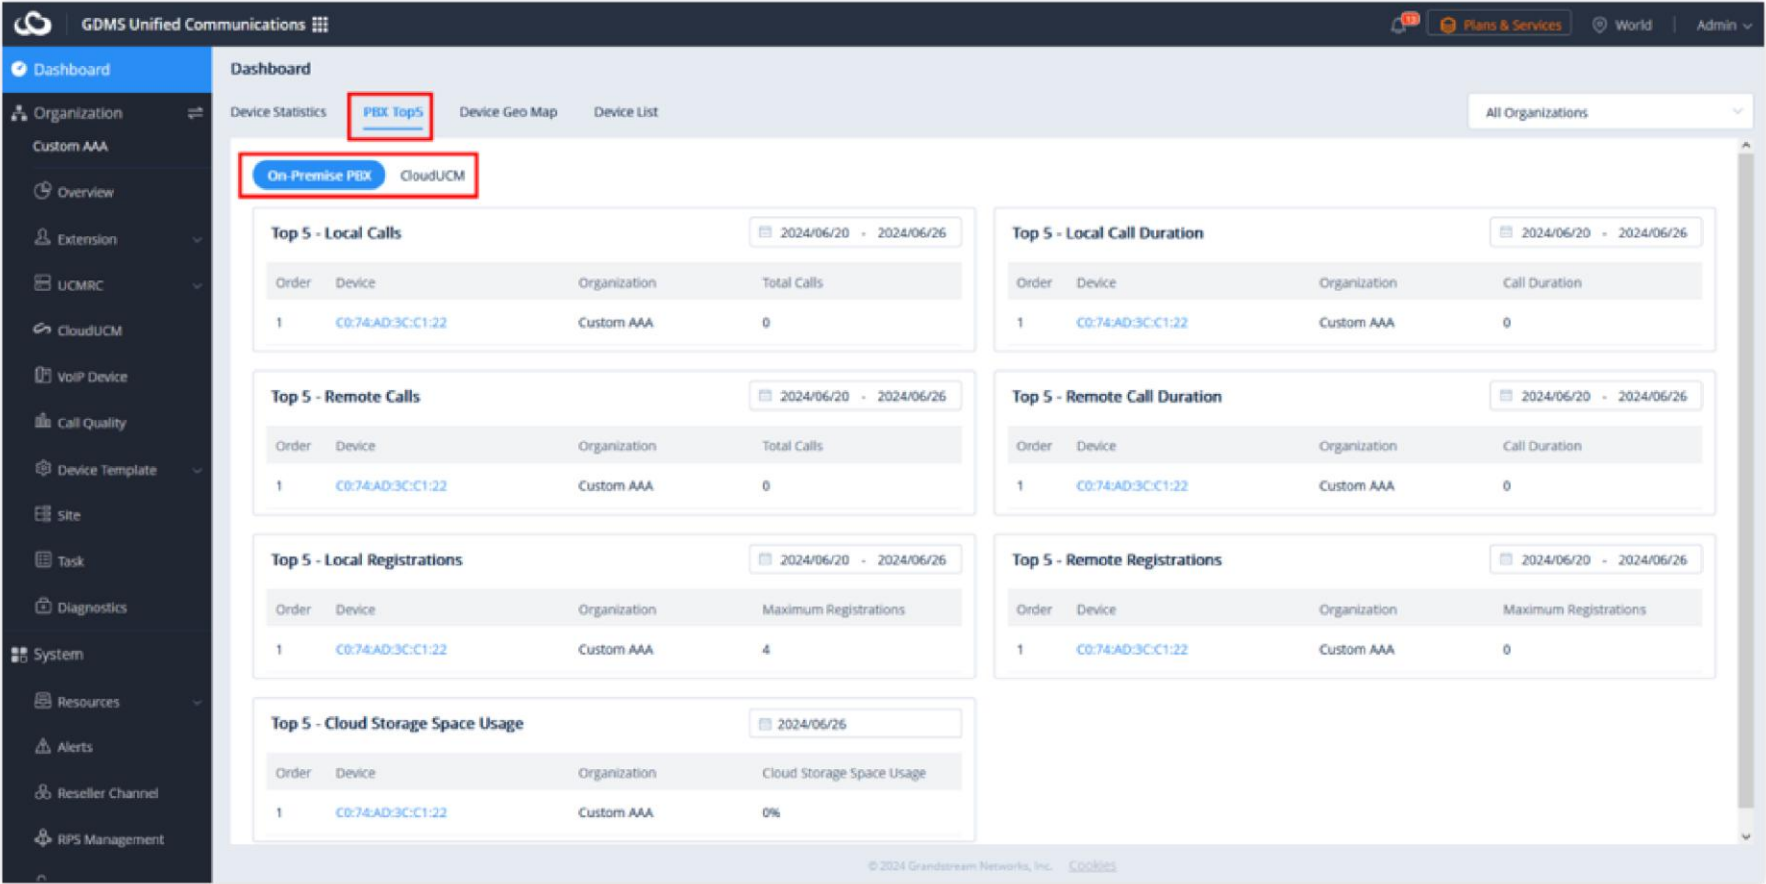

PBX Top 5

Device List

On this page, the user can view the list of all devices which are added to the organization. This includes every device that belongs to the Unified Communications system. The user can choose the categories highlighted in the screenshot below to display SIP endpoints, on-premise PBXs, or CloudUCM.

GDMS Unified Communications

Plans & ServicesWorldAdmin

Dashboard

OrganizationCustom AAACloudUCMVoIP DeviceCall QualityDevice TemplateSiteTaskDiagnosticsSystemResourcesAlertsReseller ChannelRPS ManagementUsersSystem LogAPI Developer

Dashboard

Device StatisticsPBX Top5Device Geo MapDevice List

All Organizations

VoIPOn-Premise PBXCloudUCM

All TypesAll ModelsAll Device StatusAll Account Statuses

Enter MAC/Device NameFilter

Device	Device Status	Device Model	Firmware Version	Organization	Site
C0:74:AD:24:A9:48	Offline	GVC3210	—	Custom AAA	Default
C0:74:AD:25:9F:7C	Offline	GSC3570	—	Custom AAA	Default
C0:74:AD:6B:2C:C9 dzhwu-test	Offline	GRP2601	0.1.4.8	Custom AAA	Default
C0:74:AD:06:22:02 dzhwu-test	Offline	GXW4501	—	Custom AAA	Default
32:77:77:77:77:77	Online	Wp826	—	Custom AAA	Default
C0:74:AD:23:A7:AA 11	Offline	GRP2601	0.1.4.46	Custom AAA	Default
C0:74:AD:E9:F0:D4 C0:74:AD:E9:F0:D4	Offline	HT801V2	—	Custom AAA	Default
C0:74:AD:79:FA:C1 C0:74:AD:79:FA:C1	Online	GDS3710	1.0.11.14	Custom AAA	Default
00:0B:82:89:75:A0	Offline	UT814	1.0.3.30	Custom AAA	000823070003

© 2024 Grandstream Networks, Inc. Cookies

GDMS Unified Communication Device List


Device Geo Map

This menu will show the distribution map of the devices which have been associated with the enterprise.

- The dark blue area on the map shows that the area has more associated devices, and the light blue area shows the area has fewer devices.
- Users could leave the cursor on the area to check the number of devices in that area.
- If a certain city has the devices, it will be marked with a green dot



, and users could leave the cursor on the city to check the number of devices in that city. The user can click on the dot to see the devices list in this city.

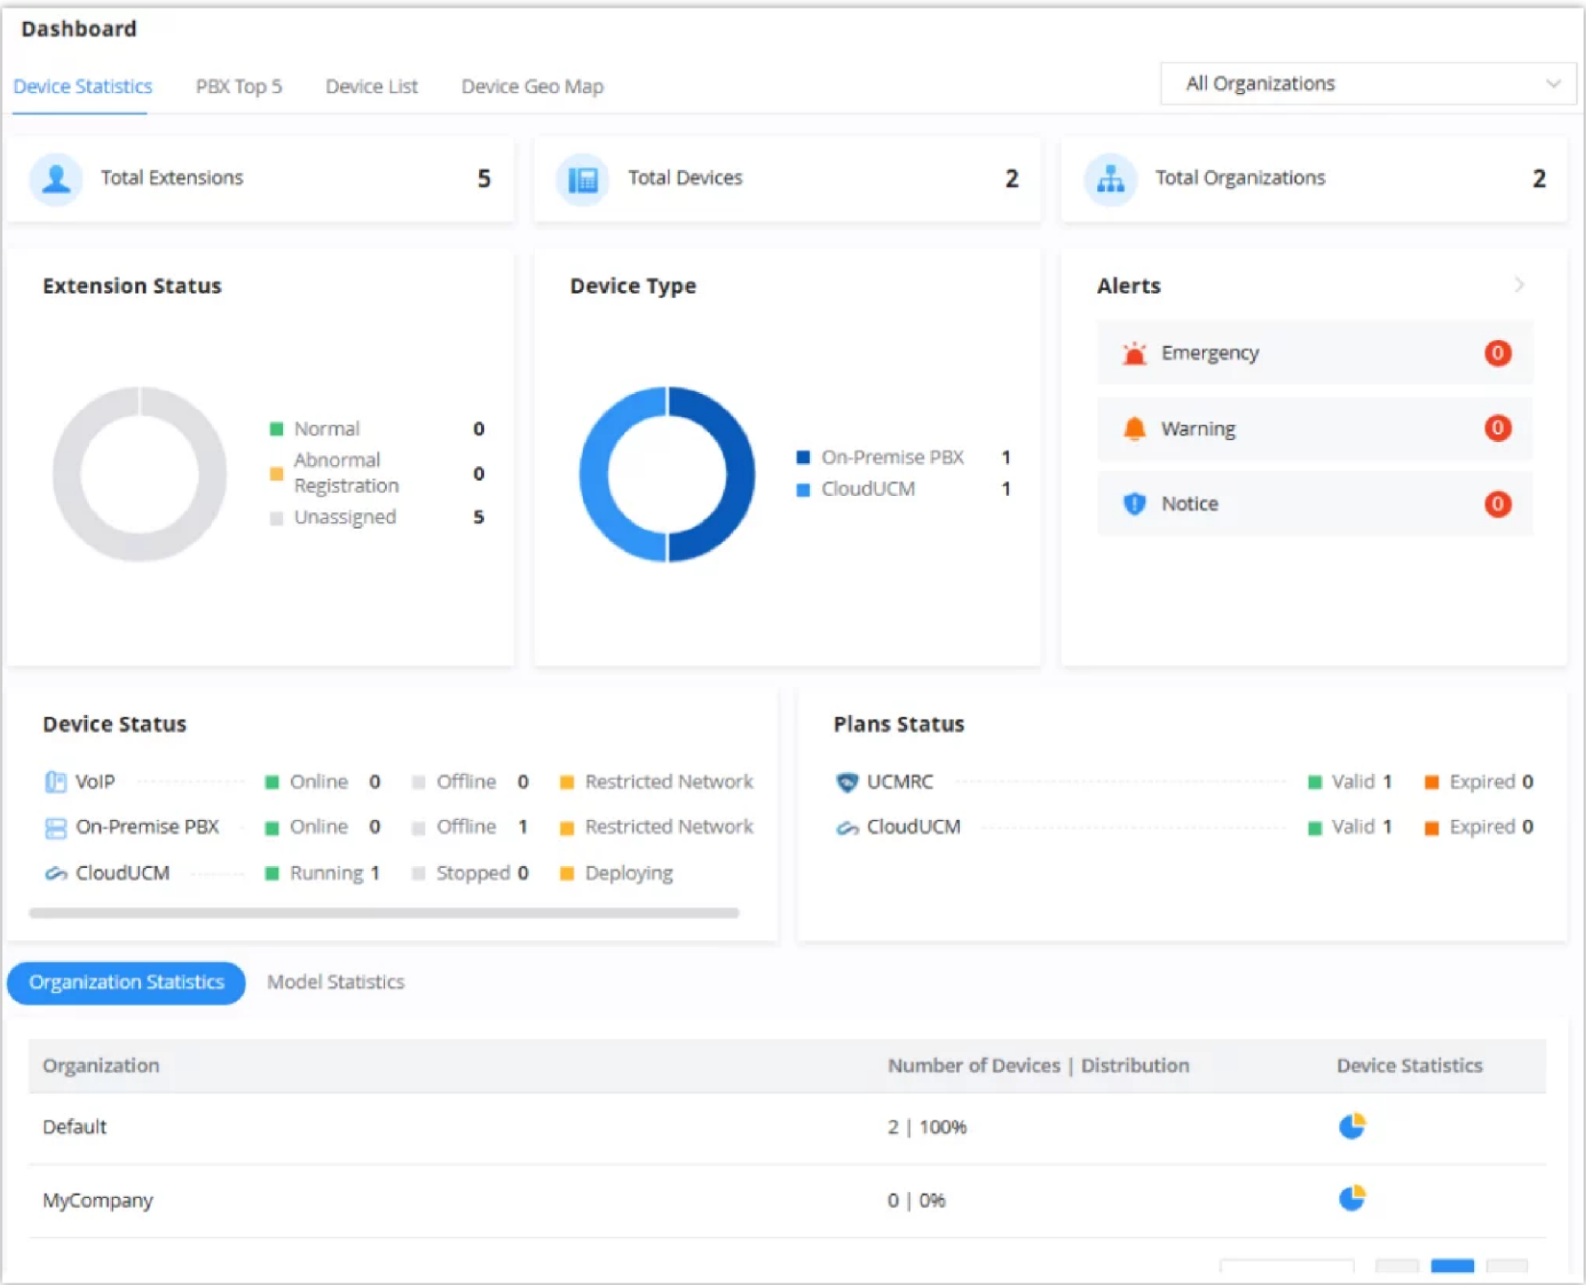


Device Distribution

ORGANIZATION

The user can use this specific button to switch quickly between organizations. The user can only see the statistics and devices from one organization at a time. The user can have the privilege of managing multiple organizations.

Overview

The Overview page displays all VoIP device statistics information in the current organization.

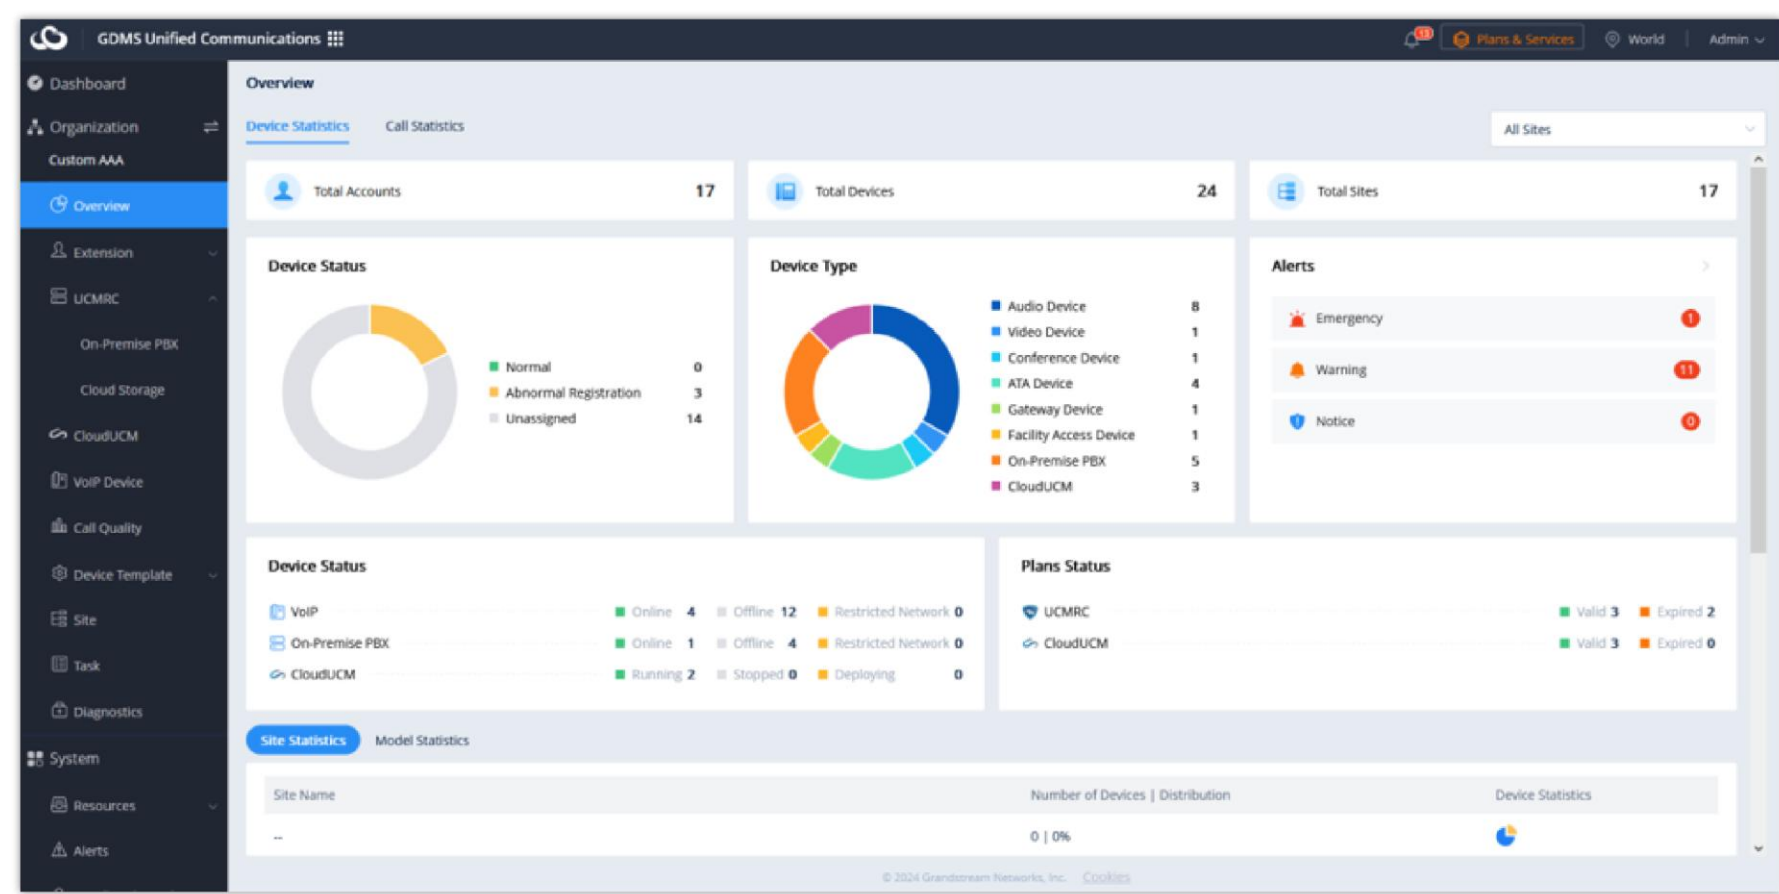

Organization Overview

Extension

On this page, the user will be able to view all the extensions that are created in the selected organization and the SIP servers that are added to the organization.

SIP Account

In this page, the user can view, create, and delete extensions for this specific organization. The user can also use the assign button to assign the extension to a specific SIP endpoint that has been added to the same organization as the extension.

The SIP Account page displays a table of SIP accounts. The table has columns for User ID, Account Name, Display Name, Account Email, SIP Server, Status, Last Updated, and Options. There are buttons for Add Account, Import Account, and Export Account. A warning message at the top indicates that there are currently 5 PBX devices that have not synced extensions. The footer indicates the page is from Grandstream Networks, Inc. and includes a Cookies link.

User ID	Account Name	Display Name	Account Email	SIP Server	Status	Last Updated	Options
6661	6661	test	—	test server (192.168.120...	Unassigned	2024-06-28 02:49...	[Edit] [Delete]
1004	CloudUCM 1004	—	—	000001.a.myucm.cloud:...	Unassigned	2024-06-14 08:32...	[Edit] [Assign] [Delete]
1003	CloudUCM 1003	—	—	000001.a.myucm.cloud:...	Unassigned	2024-06-14 08:32...	[Edit] [Assign] [Delete]
1002	CloudUCM 1002	—	—	000001.a.myucm.cloud:...	Unassigned	2024-06-14 08:32...	[Edit] [Assign] [Delete]
1001	CloudUCM 1001	—	—	000001.a.myucm.cloud:...	Unassigned	2024-06-14 08:32...	[Edit] [Assign] [Delete]
1000	CloudUCM 1000	—	—	000001.a.myucm.cloud:...	Unassigned	2024-06-14 08:32...	[Edit] [Assign] [Delete]
1007	UCM 1007	—	—	172.16.138.80:5060	Unassigned	2024-06-25 10:50...	[Edit] [Assign] [Delete]
1006	UCM 1006	—	—	172.16.138.80:5060	Unassigned	2024-06-25 10:50...	[Edit] [Assign] [Delete]
1005	UCM 1005	—	—	172.16.138.80:5060	Unassigned	2024-06-25 10:50...	[Edit] [Assign] [Delete]
1004	UCM 1004	—	—	172.16.138.80:5060	Abnormal Registration	2024-06-25 10:50...	[Edit] [Assign] [Delete]

Status	Description
Status	Normal: All devices using the account are registered, and the account is working normally. Abnormal Registration: At least one device using this account is not registered. Possible reasons include: • The device is unable to register successfully. • The account was modified through other means such as through the endpoint device web portal or provisioning. Unassigned: No devices are using this account.
From PBX	PBX This represents the SIP accounts are synchronized from the IPPBX device. If the user modifies the SIP accounts in IPPBX device, the updates will be synchronized to GDMS platform. The user can only edit SIP server, assign device, and cannot edit other information.
From CloudUCM	CloudUCM This represents the SIP accounts are synchronized from the CloudUCM. If the user modifies the SIP accounts in CloudUCM , the updates will be synchronized to GDMS platform. The user can only edit SIP server, assign device, and cannot edit other information.

Account Status Description

Operation	Description
Sorting	Click on the  buttons to sort the list in ascending/descending order based on a specific column.
Custom Display Option	Users could customize the displaying options on the list by clicking on option  on the right side of the list to select the displayed/hidden options.
Filter and Search	Filter accounts by status, and site, and search for specific accounts by entering their user IDs, account names, or display names.

Operation Description

Add SIP Account

The **SIP Account** page shows all of the SIP accounts added to GDMS.

GDMS Unified Communications

Plans & Services

World

EMEA_Test

Dashboard

Organization

Default

Overview

Extension

SIP Account

SIP Server

UCMRC

CloudUCM

VoIP Device

Call Quality

Device Template

Site

Task

Diagnostics

System

Resources

Alerts

SIP Account > Add Account

Account Name

Arthur Morgan

* SIP User ID

1000

Authenticate ID

1000

Authenticate Password

Name

Arthur Morgan

Voice Mail Access Number

48795

Outbound Proxy

* SIP Server

Select SIP Server

Add Server

Assign Device

Site

Select Model

Select MAC/Device Name

Select Account

Select SIP Server

Add

Cancel

Save

© 2024 Grandstream Networks, Inc.

Cookies

Add SIP Account

Account Active	Activates/deactivates the SIP account.
Account Name	This is a necessary option. Specifies an identity name for the SIP account.
SIP User ID	This is a necessary option. Configures user account information provided by your VoIP service provider (ITSP). It is usually in the form of digits similar to a phone number or actually a phone number.
SIP Authentication ID	This is a necessary option. Configures the SIP service subscriber’s Authenticate ID used for authentication. It can be identical to or different from the SIP User ID.
Password	This is a necessary option. Configures the account password required for the phone to authenticate with the ITSP (SIP) server before the account can be registered. After saving, it will appear as hidden for security purposes.
Name	Configure the display name of the SIP account. This option will be used for Caller ID display. The configured content will be included in the From, Contact, and P-Preferred-Identity headers of the SIP INVITE message
Voicemail Access Number	If the SIP Server also configures this item, this configuration will prevail.
SIP Server	This is a necessary option. Users need to select the SIP server for the SIP account. If there is no available SIP server for the current SIP account, users could click on the “Add Server” option to add a new SIP server for the SIP account.
Add Server	If the user needs to configure multiple SIP server addresses for a single SIP account, such as the UDP/TLS protocol server address (The UCM63xx device which purchases UCM RemoteConnect plan can synchronize multiple protocol server addresses to the GDMS platform), the user can configure it and assign to devices separately.
Assign device	This option will allow assigning a specific device to this account.

Allocate to Devices:

To associate devices currently in GDMS with the new SIP account, click on the **Add** button at the bottom of the screen and enter the following information:

SIP Account > Add Account

Account Active ☒

Account Name

* SIP User ID

SIP Authentication ID

SIP Authentication Password

Name

Voicemail Access Number

Outbound Proxy

* SIP Server

192.168.5.72(UDP) (192.168.5.72:5090)

Add Server

Assign Device

Default

GRP2615

C0:74:AD:13:2F:4C (GRP26

Account1

192.168.5.72(UDP) (192.16

Add

Cancel

Save

Assign Device

Site	This option is used to set which site this device belongs to.
Select Device Model	This is a necessary option. Users need to select the device model to which the account will be allocated.
Select Device MAC Address	This is a necessary option. Users need to select the device MAC address to which the account will be allocated.
Select Account Index	This is a necessary option. Users need to select the account index to which the account will be allocated to (e.g. Account 1 – Account 16). If the account location has a configured account, the account number will be displayed.
Select Server Address	This is a necessary option. Users can select the SIP Server address for the device, such as the UDP server address or UCM RemoteConnect server address.

!

◦

Assigning accounts to DP devices and HT devices from this page is currently not supported. Please use the account importing feature or the Device Management page to manage SIP accounts on DP devices and HT devices.

◦

If a device is not on GDMS, users will be unable to allocate a SIP account.

Batch Import SIP Account

GDMS platform allows users to import a batch of SIP accounts and SIP servers to the system and allocate them to the devices via Excel files.

1. On the **SIP Account** page, click on the **Import Account** button. The following window will appear:

Import Account

Click or drag and drop file here to upload

File types .xls and .xlsx are supported

Please use the following templates to create compatible imports.

General Device Template

DP Device Template

HT Device Template

Cancel

OK

Import SIP Account

2. Click on either the Download **General Device Template** button, Download **DP Device Template**, or Download **HT Device Template** button to get a template that will be used to import account and server information.

	A	B	C	D	E	F	G	H	I	J
1	Instructions: Please read this instruction before filling in. Please do not delete it. 1. Fields marked with * are required and cannot be empty. 2. SIP Server: Enter the SIP Server IP address. If multiple servers have the same IP address, fill in the form: IP Address(Server Name). 3. Outbound Proxy: If the SIP Server also configured the outbound proxy, then this configuration will take priority. 4. MAC Address: Valid characters are 0-9, A-Z, hyphens (-), and colons (:). (e.g. 00-15-65-1A-2B-3C, 00:15:65:1a:2b:3c, 0015651a2B3c, etc.). If users want to assign accounts to multiple devices, they must enter the MAC addresses in multiple lines. 5. Account Index: This option is required if users want to assign accounts to a device. Users need to select and assign the SIP account to the N location in the devices. Account 1-16 can be selected. If the device does not have Account N, the configuration will fail.									
2	Account Name	*SIP Server	*SIP User ID	Authentication ID	Authentication Password	Display Name	Voice Mail Access Number	Outbound Proxy	Device MAC Address	Account Index
3										
4										
5										
6										
7										
8										
9										
10										
11										

Import Account Template General Device Template

	A	B	C	D	E	F	G	H	I	J	K	L
1	Instructions: Please read this instruction before filling in. Please do not delete it. 1. Fields marked with * are required and cannot be empty. 2. SIP Server: Enter the SIP Server IP address. If multiple servers have the same IP address, fill in the form: IP Address(Server Name). 3. Outbound Proxy: If the SIP Server also configured the outbound proxy, then this configuration will take priority. 4. MAC Address: Valid characters are 0-9, A-Z, hyphens (-), and colons (:). (e.g. 00-15-65-1A-2B-3C, 00:15:65:1a:2b:3c, 0015651a2B3c, etc.). If users want to assign accounts to multiple devices, they must enter the MAC addresses in multiple lines. 5. Account Index: This option is required if users want to assign accounts to a device. Users need to select and assign the SIP account to the N location in the devices. Account 1-16 can be selected. If the device does not have Account N, the configuration will fail. 6. Profile: Required for only DP devices. Users must select from Profile 1-4. 7. HS Mode: Required for only DP devices. Users must select either HS1-5, Circular, Linear, or Parallel. Default setting is Circular. 8. HS Line: Required for only DP devices. Users can select the HS line for each handset (e.g. Line 1-10 can be selected for HS1- HS2).											
2	Account Name	*SIP Server	*SIP User ID	Authentication ID	Authentication Password	Display Name	Voice Mail Access Number	Outbound Proxy	DP MAC Address	Account Index	Profile	HS Mode
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												

Import Account Template DP Device Template

	A	B	C	D	E	F	G	H	I	J	K	L
1	Instructions: Please read this instruction before filling in. Please do not delete it. 1. Fields marked with * are required and cannot be empty. 2. SIP Server: Enter the IP address of the SIP server. If multiple servers have the same IP address, use the following format: IP Address(GDMS Server Name). 3. Outbound Proxy: If the SIP Server also configured the outbound proxy, then this configuration will take priority. 4. MAC Address: Valid characters are 0-9, A-Z, hyphens (-), and colons (:). (e.g. 00-15-65-1A-2B-3C, 00:15:65:1a:2b:3c, 0015651a2B3c, etc.). To assign accounts to multiple devices, separate each device's MAC address by line. 5. Port Type & Port Number: Required for only HT devices. SIP accounts must be selected and assigned to one of the physical ports on the HT device (port NO). If a device does not have port N available, the configuration will fail. 6. Profile: Required for only HT devices. Select from Profile 1-2. 7. Hunting Group: Required for only HT devices. Users must select None, Active, or Port N (unused). Default setting is None.											
2	Account Name	*SIP Server	*SIP User ID	Authentication ID	Authentication Password	Display Name	Voice Mail Access Number	Outbound Proxy	HT MAC Address	Port Type(PXS/FXO)	Port Index	Profile
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												
17												
18												
19												

Import Account Template HT Device Template

Account Name	This is an optional option. Users need to set the identity name for the SIP account.
SIP Server	This is a necessary option. Users need to input the SIP server address. If the SIP server does not exist in the GDMS platform, the GDMS platform will create the SIP server in the system.

SIP User ID	This is a necessary option. Configures user account information provided by your VoIP service provider (ITSP). It is usually in the form of digits similar to a phone number or actually a phone number.
SIP Authentication ID	This is a necessary option. Configures the SIP service subscriber’s Authenticate ID used for authentication. It can be identical to or different from the SIP User ID.
SIP Authentication Password	This is a necessary option. Configures the account password required for the phone to authenticate with the ITSP (SIP) server before the account can be registered. After saving, it will appear as hidden for security purposes.
Display Name	Configure the display name of the SIP account. This option will be used for Caller ID display. The configured content will be included in the From, Contact, and P-Preferred-Identity headers of the SIP INVITE message.
Device MAC Address	Input the device MAC address: e.g. 00-15-65-1A-2B-3C; 00:15:65:1a:2b:3c; 0015651a2B3c
Account Index	Users need to select the account index to which the account will be allocated (e.g. Account 1 – Account 16). If the current account location has a configured account, the configured account will be replaced with the new account information.
Profile	For DP devices and HT devices only. Enter the profile that the account will use (e.g. Profile1, Profile2, etc.). If multiple different SIP servers use the same profile, the import will fail.
HS Mode	For DP devices only. Enter the HS mode for the account. Available options are “Circular”, “Linear”, “Parallel”, and “HSx”, where x can be 1 to 5.
HS1-HS5	For DP devices only. Users could configure the Line for each handset from Line 1 to Line 10. Each SIP account can be allocated to different handsets.
Port Type (FXS/FXO)	This option is valid only for HT devices. Input the port type which will be assigned to the device. Users could select FXO port type or FXS port type.
Port Serial Number	This option is valid only for HT devices. Input the port serial number which will be assigned to the device. Users could input the port serial number from Port 1 to Port 10.
Search Group	This option is valid only for HT devices. Users could select the search group between None (default), Active, and other port serial numbers beside their own.

Import Account Template Options

- Once the template is filled out, drag, and drop the file to the upload window or select the file from your PC. Click on the **Import** button to confirm the import.
- When the Excel file is imported into the GDMS platform successfully, the GDMS platform will prompt the execution result. If there is data that failed to be imported, the user could export the failed data and re-edit the Excel file.

Examples:

- If the user wants to allocate 1 SIP account to multiple devices, the 1st SIP account information will be the correct information to allocate to the devices.

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	Device MAC Address	Account Index
Work Account	192.168.120.100	100	100	123456	Squang	00:0B:82:E2:08:D8	Account1
Work Account	192.168.120.100	100	100	123456	Squang123	00:0B:82:D2:11:22	Account1

Example 1

- For the existing SIP account, if the user wants to allocate this SIP account to another device, here is the example: Account 100 has been allocated to Device 1, and the user wants to allocate the SIP account 100 to Device 2 (00:0b:82:cc:dd:ee).

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	Device MAC Address	Account Index
Work Account	192.168.120.100	100	100	123456	Squang	00:aa:bb:cc:ee:dd	Account1

Example II

3. If the user wants to allocate multiple SIP accounts to a single device, here is an example:

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	Device MAC Address	Account Index
Work Account	192.168.120.100	100	100	123456	Squang	00:0B:82:E2:08:D8	Account1
Work Account	192.168.120.100	200	200	123456	Squang	00:0B:82:E2:08:D8	Account2
Work Account	192.168.200.100	300	300	123456	Emily	00:0B:82:E2:08:D8	Account3

Example III

4. If the user wants to allocate multiple SIP accounts to a single DP device, here is an example:

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	DP MAC Address	Account Index	Profile	HS Mode	HS1	HS2	HS3	HS4	HS5
Work Account	192.168.120.100	100	100	123456	Squang	00:0B:82:E2:08:D8	Account1	Profile1	HS1	Line 1				
Work Account	192.168.120.100	200	200	123456	Squang	00:0B:82:E2:08:D8	Account2	Profile1	Circular	Line 2	Line 1			
Work Account	192.168.200.100	300	300	123456	Squang	00:0B:82:E2:08:D8	Account3	Profile2	Circular	Line 3	Line 2			

Example IV

Incorrect examples:

1. If the user wants to allocate multiple SIP accounts to a single device, the account index cannot be the same.

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	DP MAC Address	Account Index
Work Account	192.168.120.100	100	100	123456	Squang	00:0B:82:E2:08:D8	Account1
Work Account	192.168.120.100	200	200	123456	Squang	00:0B:82:E2:08:D8	Account1

Example V

2. Different SIP server addresses cannot be allocated to the same Profile in the same DP device.

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	DP MAC Address	Account Index	Profile
Work Account	192.168.120.100	200	200	123456	Squang	00:0B:82:E2:08:D8	Account2	Profile1
Work Account	192.168.200.200	300	300	123456	Squang	00:0B:82:E2:08:D8	Account3	Profile1

Example VI

3. If the user wants to allocate the SIP accounts to the same DP device, the different SIP accounts cannot be allocated to the same HS Line.

Account Name	*SIP Server	*SIP User ID	*Authentication ID	*Authentication Password	Display Name	DP MAC Address	Account Index	Profile	HS Mode	HS1	HS2	HS3	HS4	HS5
Work Account	192.168.120.100	200	200	123456	Squang	00:0B:82:E2:08:D8	Account2	Profile1	Circular	Line 1	Line 1			
Work Account	192.168.200.200	300	300	123456	Squang	00:0B:82:E2:08:D8	Account3	Profile2	Circular	Line 1	Line 2			

Example VII

Allocate Device

Users could allocate the SIP accounts to the devices while adding SIP accounts, editing SIP accounts, or importing a batch of SIP accounts to the GDMS platform. Each SIP account can be allocated to multiple devices.

Edit Account

Users could edit the SIP account information and allocated devices on the **Edit Account** configuration page.

1. Click on the



button for the SIP account you want to modify.

GDMS Unified Communications

Plans & Services

World

EMEA_Test

Dashboard

Organization

Default

Overview

Extension

SIP Account

SIP Server

UCMRC

CloudUCM

VoIP Device

Call Quality

Device Template

Site

Task

Diagnostics

System

Resources

Alerts

SIP Account > Edit Account

Account Name

Arthur Morgan

* SIP User ID

1000

Authenticate ID

1000

Authenticate Password

Name

Arthur Morgan

Voice Mail Access Number

48795

Outbound Proxy

* SIP Server

UCM6302 (192.168.5.110)

Add Server

Assign Device

Site

Select Model

Select MAC/Device Name

Select Account

Select SIP Server

Add

Cancel

Save

© 2024 Grandstream Networks, Inc.

Cookies

Edit Account

2. Click on the **Save** button to finalize changes. All associated devices will receive the updated account information.

3. Click on the  button to unallocate devices from the account. The SIP account will be removed from unassigned devices.



◦ If the device is offline at the time, its SIP account information will be updated when it is online again.

◦ If the SIP server is synchronized from the IPPBX server, it cannot be edited, and it can only be assigned to the device.

Delete Account

To delete SIP accounts on GDMS, click on the  button for a single account or the **Delete** button in the top-left corner for multiple accounts. Associated devices will automatically remove deleted SIP account information.

Users could delete 1 single SIP account or a batch of SIP accounts on the GDMS platform:

GDMS Unified Communications

Plans & Services

World

EMEA_Test

Dashboard

Organization

Default

Overview

Extension

SIP Account

SIP Server

UCMRC

CloudUCM

VoIP Device

Call Quality

Device Template

Site

SIP Account

Add Account

Import Account

Export Account

Delete

Modify SIP Server

All Statuses

All SIP Servers

Site

User ID/Account/Name/Device Name/MAC

☐	User ID	Account Name	Display Name	Extension Email	SIP Server	Status	Last Updated	Options
☐	1000	Arthur Morgan	Arthur Morgan	—	UCM6302 (192.168.5.110)	Unassigned	2024/07/10 09:37...	 

Total 1

<

1

>

10/page

© 2024 Grandstream Networks, Inc.

Cookies

Delete Account

❗ If the SIP account is synchronized from the IPPBX server, this will only delete the data in the GDMS platform, and the data in the IPPBX server will not be deleted.


Batch Modify SIP Server of SIP Accounts

Users can batch modify the SIP server of the SIP accounts, e.g. Modify the SIP protocol of the SIP server from UDP to TCP.

- 1. On the “SIP Account” interface, select the SIP accounts that need to be modified.


ℹ The user can select the SIP accounts by searching the items. E.g. If the user wants to modify the SIP server for 250 SIP accounts, the user can set the page to display 250 SIP accounts at once from 10 SIP accounts per page and select all SIP accounts on the page.

- 2. Click on the “Modify SIP Server” button at the top of the interface.

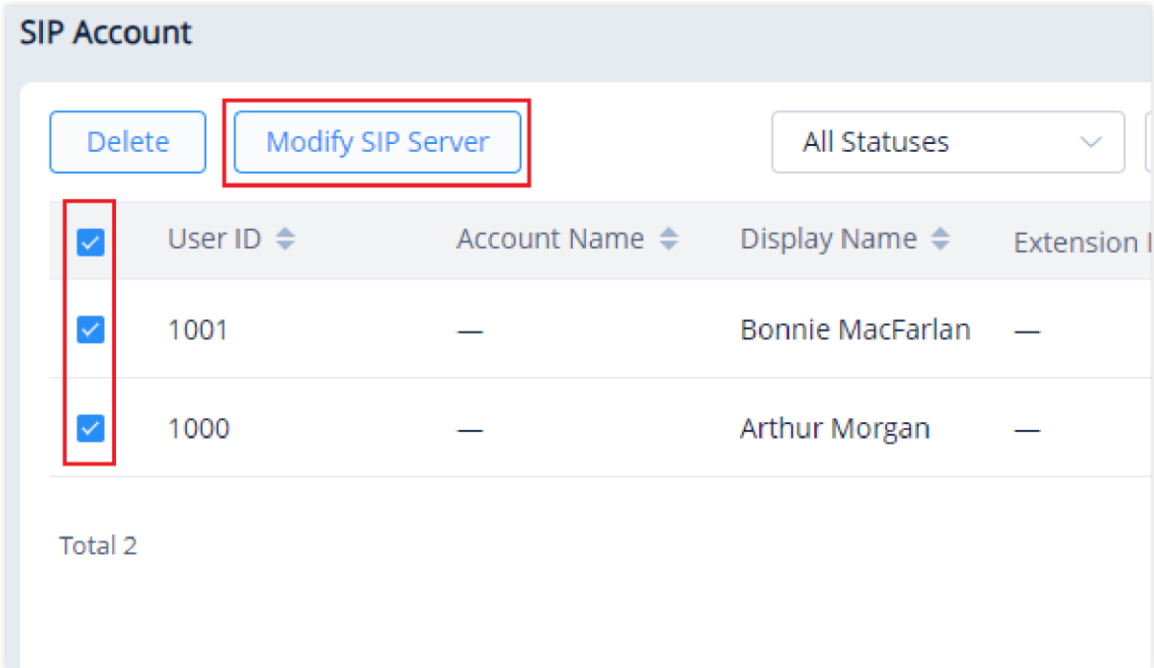

Modify SIP Server

- 3. Select the target SIP server, which can be searched by the server name.

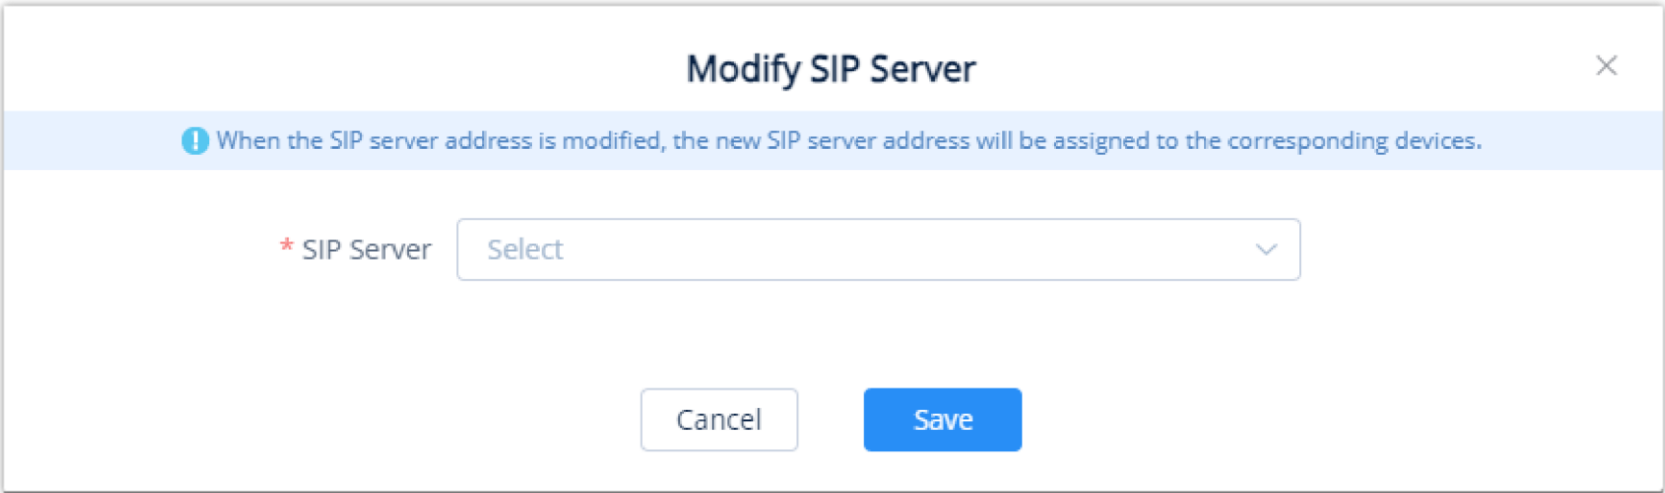

Modify SIP Server

- 4. After clicking the “OK” button, the SIP server corresponding to the SIP accounts will be modified immediately. Then, the updated account information will be assigned to the corresponding VOIP devices.

✅ If the SIP accounts are synchronized from IPPBX device, the SIP accounts information will be synchronized after the SIP server is modified.

Export Account

Users can export all existing SIP accounts in GDMS to a file by clicking on the **Export Account** button in the top-right corner of the **SIP Account** page.

SIP Server

Add SIP Server

The **SIP Server** page shows all of the SIP servers added to GDMS.

GDMS Unified Communications

Plans & Services

World

Dashboard

Organization

Default

Overview

Extension

SIP Account

SIP Server

UCMRC

CloudUCM

VoIP Device

Call Quality

Device Template

Site

Task

SIP Server > Add Server

* Server Name

* SIP Server

Backup Outbound Proxy

Voice Mail Access Number

DNS Mode

Select

NAT Traversal

Select

Proxy-Require

Outbound Proxy

Additional Settings

Add

Cancel

Save

© 2024 Grandstream Networks, Inc.

Cookies

Add SIP Server

Server Name	Specifies an identity name for the SIP server. (Required)
SIP Server	This is a necessary option. Specifies the URL or IP address, and port of the SIP server. This should be provided by the VoIP service provider (ITSP).
Outbound Proxy	Configures the IP address or the domain name of the primary outbound proxy, media gateway, or session border controller. It is used by the phone for firewall or NAT penetration in different network environments. If a symmetric NAT is detected, STUN will not work and only an outbound proxy can provide a solution.
Secondary Outbound Proxy	Sets the IP address or domain name of the secondary outbound proxy, media gateway, or session border controller. The phone system will try to connect the Secondary outbound proxy only if the primary outbound proxy fails.
Voice Mail Access Number	Sets if the phone system allows users to access the voice messages by pressing the MESSAGE key on the phone. This ID is usually the VM portal access number. For example, in UCM6xxx IPPBX, *97 could be used.
DNS Mode	Defines which DNS service will be used to look up the IP address for the SIP server’s hostname. There are three modes: A Record SRV NATPTR/SRV To locate the server by DNS SRV set this option to “SRV” or “NATPTR/SRV”.

NAT Traversal	Specifies which NAT traversal mechanism will be enabled on the phone system. It can be selected from the dropdown list: ○ NAT NO ○ STUN ○ Keep-alive ○ UPnP ○ Auto ○ VPN If the outbound proxy is configured and used, it can be set to “NAT NO”. If set to “STUN” and the STUN server is configured, the phone system will periodically send a STUN message to the STUN server to get the public IP address of its NAT environment and keep the NAT port open. STUN will not work if the NAT is a symmetric type. If set to “Keep-alive”, the phone system will send the STUN packets to maintain the connection that is first established during the registration of the phone. The “Keep-alive” packets will fool the NAT device into keeping the connection open and this allows the host server to send SIP requests directly to the registered phone. If it needs to use OpenVPN to connect to the host server, it needs to set it to “VPN”. If the firewall and the SIP device behind the firewall are both able to use UPnP, it can be set to “UPnP”. Both parties will negotiate to use of which port to allow SIP through.
Proxy-Require	Adds the Proxy-Required header in the SIP message. It is used to indicate proxy-sensitive features that must be supported by the proxy. Do not configure this parameter unless this feature is supported on the SIP server.
Additional Settings	Users could add the custom fields below. Some custom fields are only available for certain device models: 1. Secondary SIP Server 2. Failover SIP Server 3. Prefer Primary SIP Server 4. Primary IP 5. Backup IP 1 6. Backup IP 2 7. DNS SRV Failover Mode 8. Use NAT IP 9. SIP Diff-Serv 10. RTP Diff-Serv 11. Tel URI For detailed filling rules, please refer to the User Guide of the devices.

Add SIP Server

Upon adding the SIP server, it will appear in the SIP Server list. Entries in the list can be edited or deleted.

SIP Server

Add Server

Delete

From All

Enter Server Name/Server Address

☐	Server Name	Server Address	Account Number	Options	
☐	UCM6302(TLS) PBX	c074ad2eabb2.d.gdms.work:5061	0		
☐	UCM6302(UDP) PBX	192.168.5.136:5060	14		
☐	UCM6302(TLS) PBX	192.168.5.136:5061	0		
☐	UCM6302(TCP) PBX	192.168.5.136:5060	0		
☐	070069.szclouducm.gdms.work(TLS) CloudUCM	070069.szclouducm.gdms.work:5061	5		
☐	UCM6302	192.168.5.110	2		

Total 6

<

1

>

10/page

Finish Adding SIP Server to GDMS

Edit SIP Server

Users can edit SIP server information by clicking on the button for the desired SIP server. Changes to the server will affect all associated SIP accounts.

If the SIP server is synchronized from the IPPBX server, it cannot be edited.

Delete SIP Server

Users can delete selected SIP servers by selecting them in the SIP server list and clicking on the **Delete** button in the top left corner of the **SIP Server** page.

×

Delete the selected 2 SIP Account?

After deleting the account, the associated devices will be removed

Cancel

OK


Delete SIP Server

If the SIP server is synchronized from the IPPBX server, this will only delete the data in the GDMS platform, and the data in IPPBX server will not be deleted.

UCMRC

On-Premise PBX

The PBX Device page shows all associated IPPBXs which can be UCM6xxx devices, GCC devices , or SoftwareUCM on-premise management systems. Users can view the firmware version numbers, IP addresses, plans, and other information of the IPPBX devices. It also allows users to access the device, upgrade firmware, reboot the devices remotely, etc.

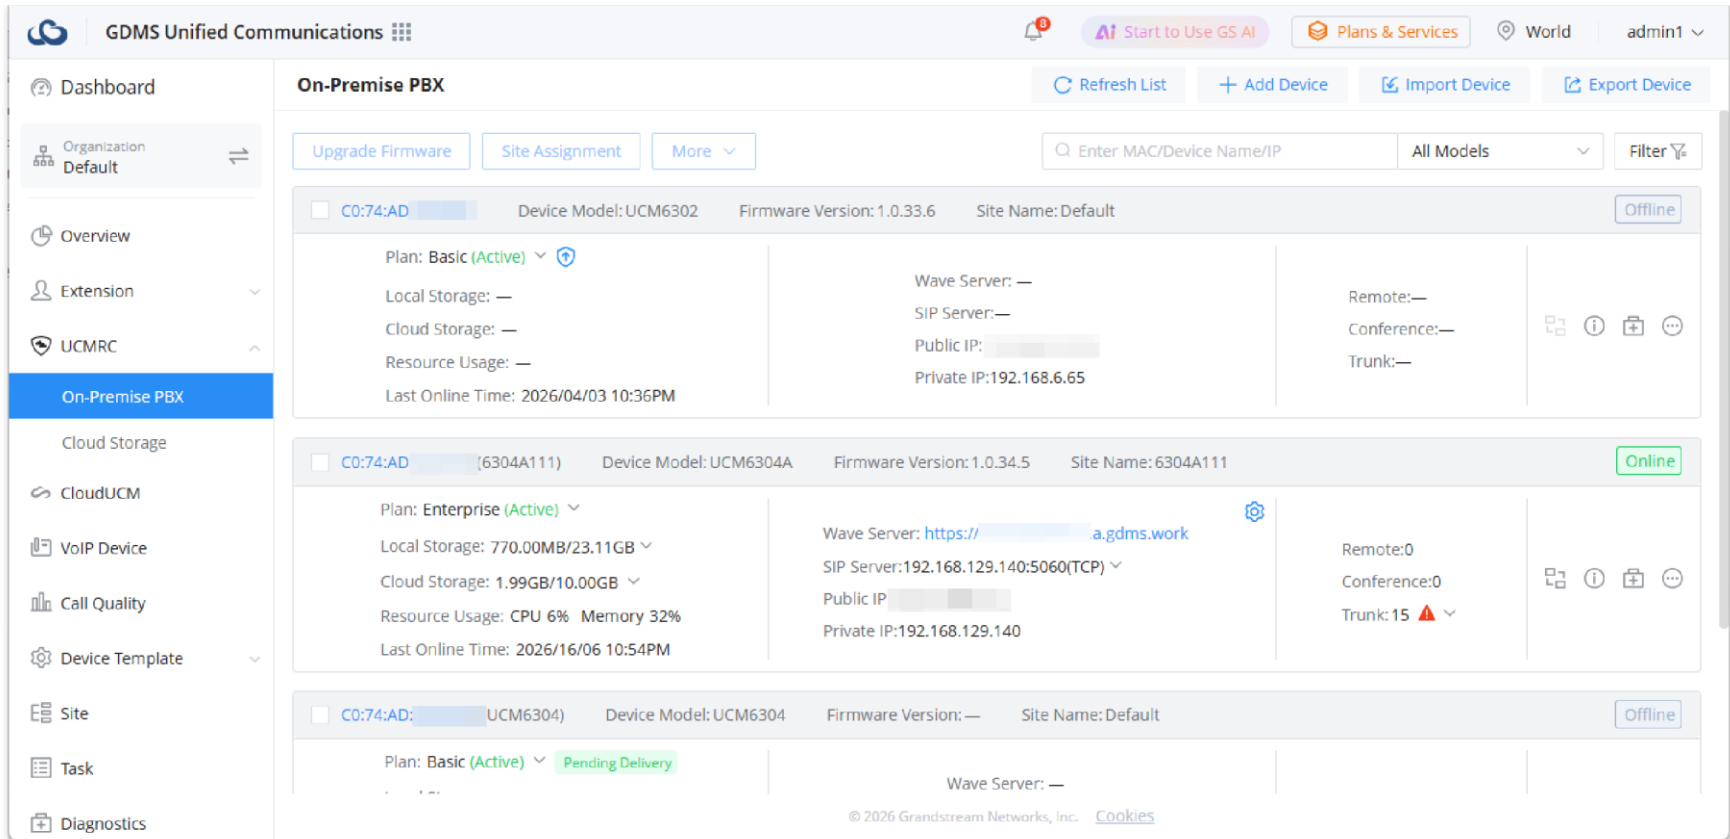

On premise PBX

- **Plan:** Displays the RemoteConnect plan of the device.
- **Local Storage:**Displays the used and the free local storage.
- **Cloud Storage:** Displays the used and the free local storage.
- **Resource Usage:** Displays the CPU usage and the RAM usage.
- **Last Online Time:** Displays the date and the time of the last time the device was online.
- **Wave Server:** Shows the address to use for Wave.
- **SIP Server:** Shows the address.
- **Public IP:** Displays the public IP address of the device or network gateway.
- **Private IP:** Displays the private IP of the device, if the device is behind a NAT gateway.
- **Remote:** Displays the number of remotely registered to the UCM.
- **Conference:** Displays the number conferences created on the UCM.
- **Trunk:** Displays the number of trunks created on the device.


Status	Description
Status indicator	Offline The device is offline.
	Online The device is online.
Firmware version too low	This icon indicates device firmware version is too low and the device cannot be used normally with GDMS.
Plan Status	Expire Soon This indicator means the plan is expiring soon or already expired.

IPPBX Device Management

Operation	Description
Sorting	Click on the sorting buttons to sort the list by various columns in ascending/descending order.
Custom Display Option	Click on the button on the top right corner of the list to select the columns to show and/or hide.

Operation	Description
Search	In addition to being able to search for devices with the search bar near the top-right corner of the page, users can further refine search results by clicking on the Filter button by specifying device status, site, city, and firmware version.

Operation Instructions

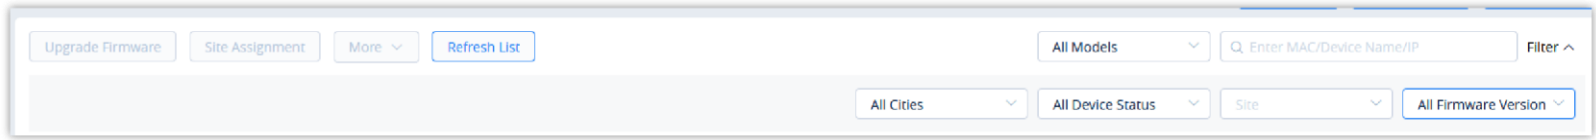

Search Devices


Add IPPBX Device

To add a new IPPBX device to the GDMS platform, users can click on the **Add Device** button. Please see the screenshot below:



Add IPPBX MAC Address

Once the correct MAC address is provided, users will need to provide the following information below:

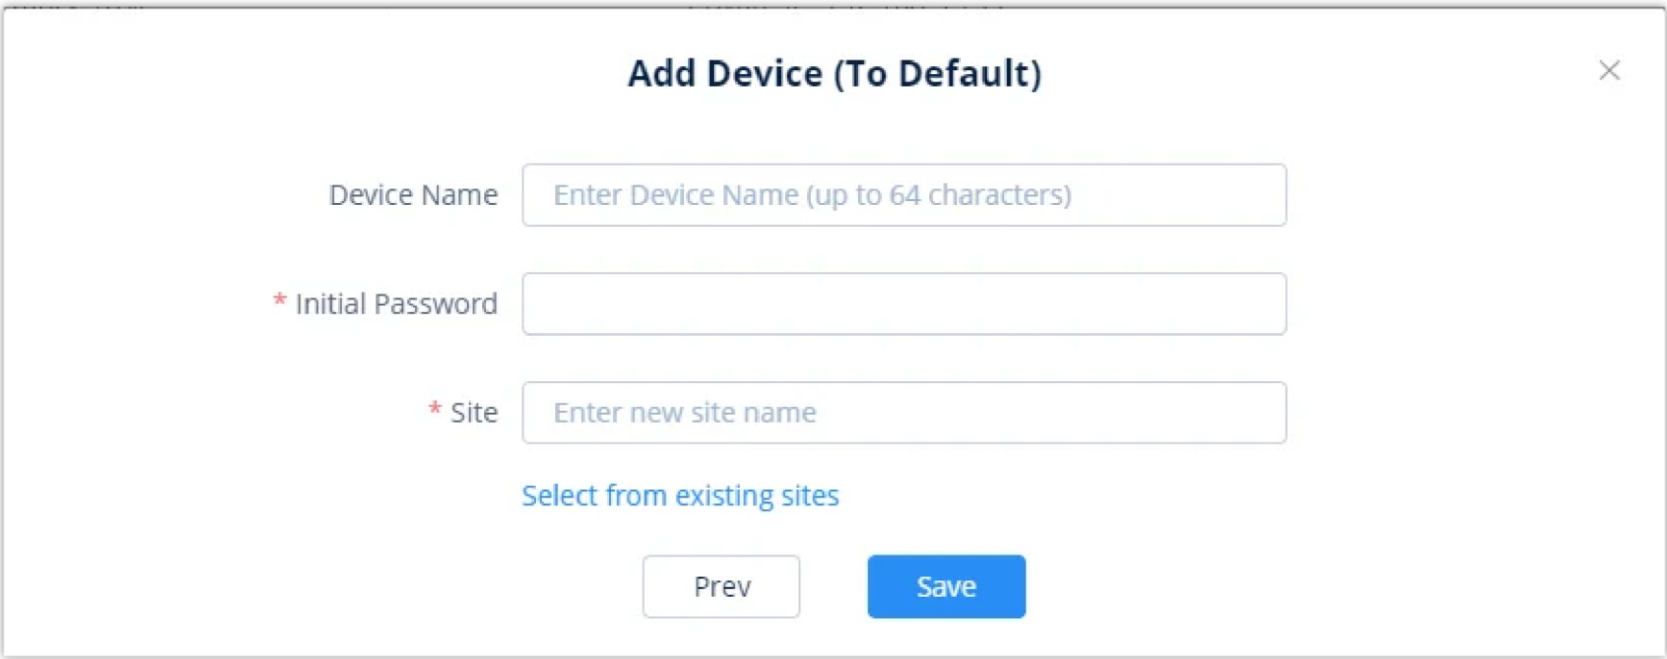

Add IPPBX MAC Address

When SoftwareUCM device is added, the following information will be displayed:

Add Device

Device Name

Enter Device Name (up to 64 characters)

* S/N

Enter S/N

* Site

Select or enter a new site

Activate UCMRC Free Trial Plan (Plus)

Prev

Save

Add IPPBX MAC Address for SoftwareUCM


Device Name	(Optional) This option is used to set the name of the device so that the users could identify this device. The maximum number of the input characters is up to 64.
MAC Address	(Required) This option is used to enter the MAC address of the device. (Locate the MAC address on the MAC tag of the unit, which is on the underside of the device, or on the package. Or the address can be viewed on the IPPBX Web GUI System Status System Information Network interface (LAN MAC address).
Initial Password	(Required) This option is used to enter the Initial Password of the device. The original password can be viewed on the UCM’s case or LCD.
S/N	(Required) This field is used to provided the serial number of the on-Premise PBX. Note: using S/N is used when adding a SoftwareUCM device.
Select Site	(Required) This option is used to set which site this device belongs to. The newly created site name is the same as the name of the IPPBX device, as the first level site. The user can also select another site.
Enable Cloud Storage for UCM	After enabling the option, the recording files and chats will be stored to the GDMS if the PBX device has the paid UCMRC plan.
Activate UCMRC Free Trial Plan (Plus)	Activates the UCMRC Free Trial Plan (Plus), If not activated, the free Basic plan will be assigned to the device instead. Enabled by default.

Add IPPBX Device

i

- When the device is added to the GDMS platform successfully, the SIP accounts in UCM63xx and GCC Device will be synchronized to the GDMS platform by default. If the user wants to turn off the synchronization function, please refer to the UCM63xx RemoteConnect Guide for details.
- Users could click on the “Save” button to save the configuration.
- Each device can only be associated with only one GDMS account.
- Users can use the search bar on the Device page to find added devices via device name, MAC address, and sites.
- When adding a SoftwareUCM device, only Mac address and SN serial number are supported.

After clicking the “Save” button, the device will be added to the GDMS platform successfully. When an IPPBX device is added for the first time, a trial period for the RemoteConnect Plus plan will start at the time of adding the device.

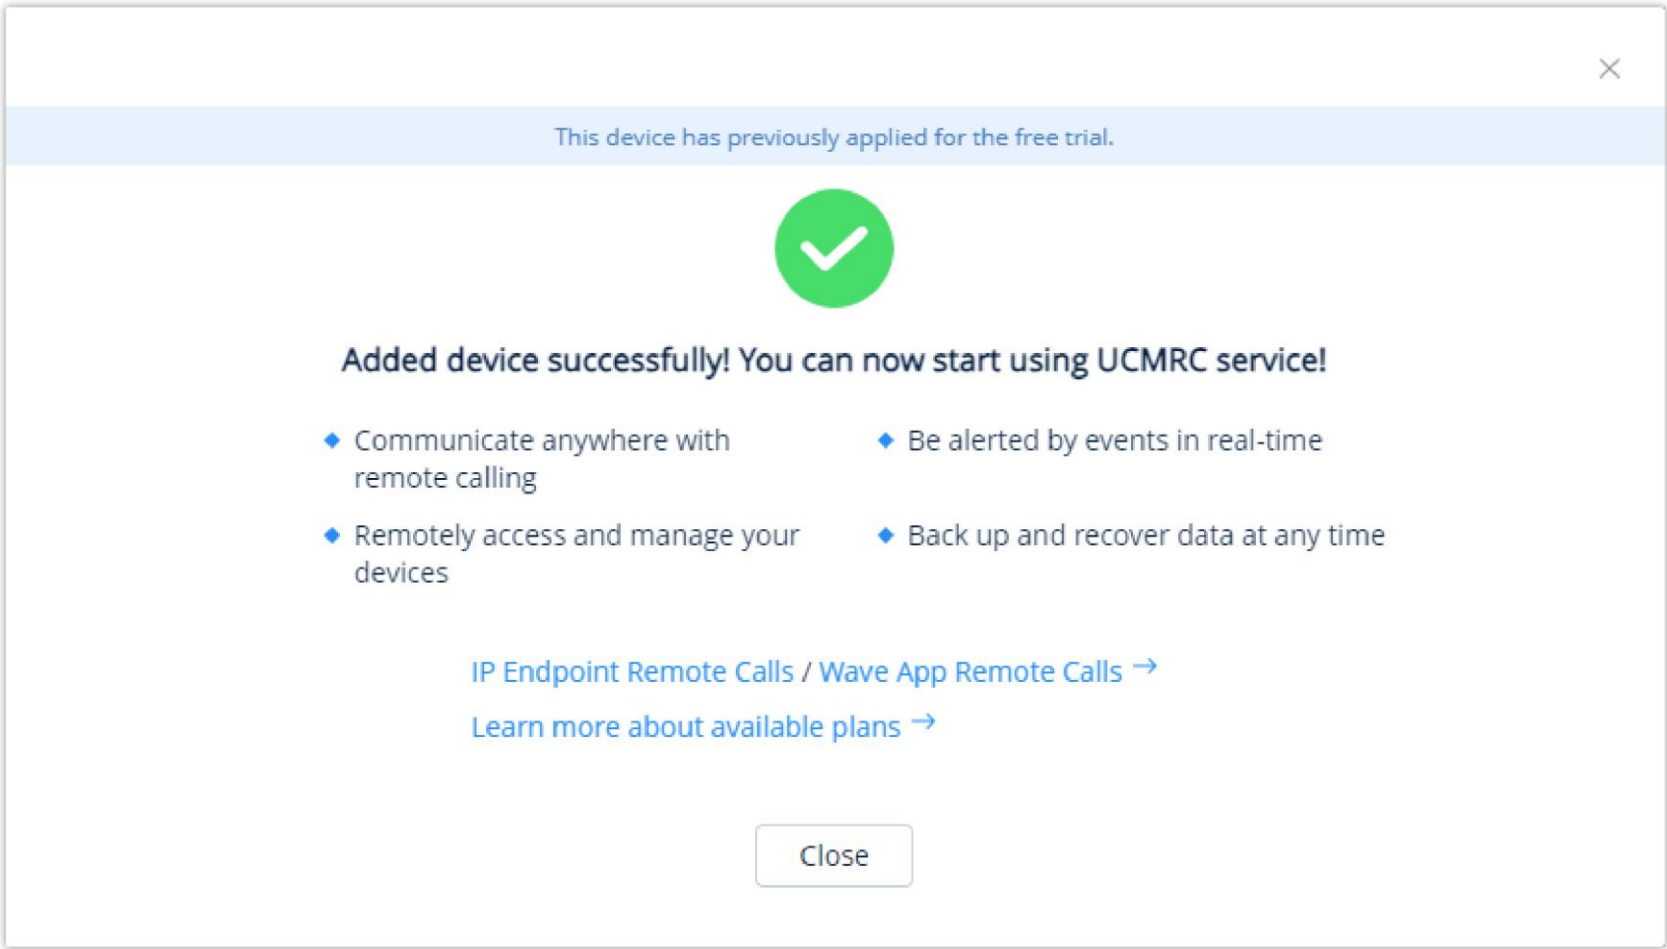


Device Added Successfully

 **Notes**

- Each IPPBX device only can apply for a UCMRC advanced plan free trial once for 3 months. If the user purchased a UCMRC plan before or applied for a UCMRC plan free trial before, the user cannot apply for another free trial anymore.
- If the user has not applied for a UCMRC plan free trial before, the user can apply for it on the “IPPBX Devices” list.


Batch Import IPPBX Devices

Users can import multiple devices by uploading a file. Click on the **Import Devices** button on the **Device** page to get started. The following window will appear:

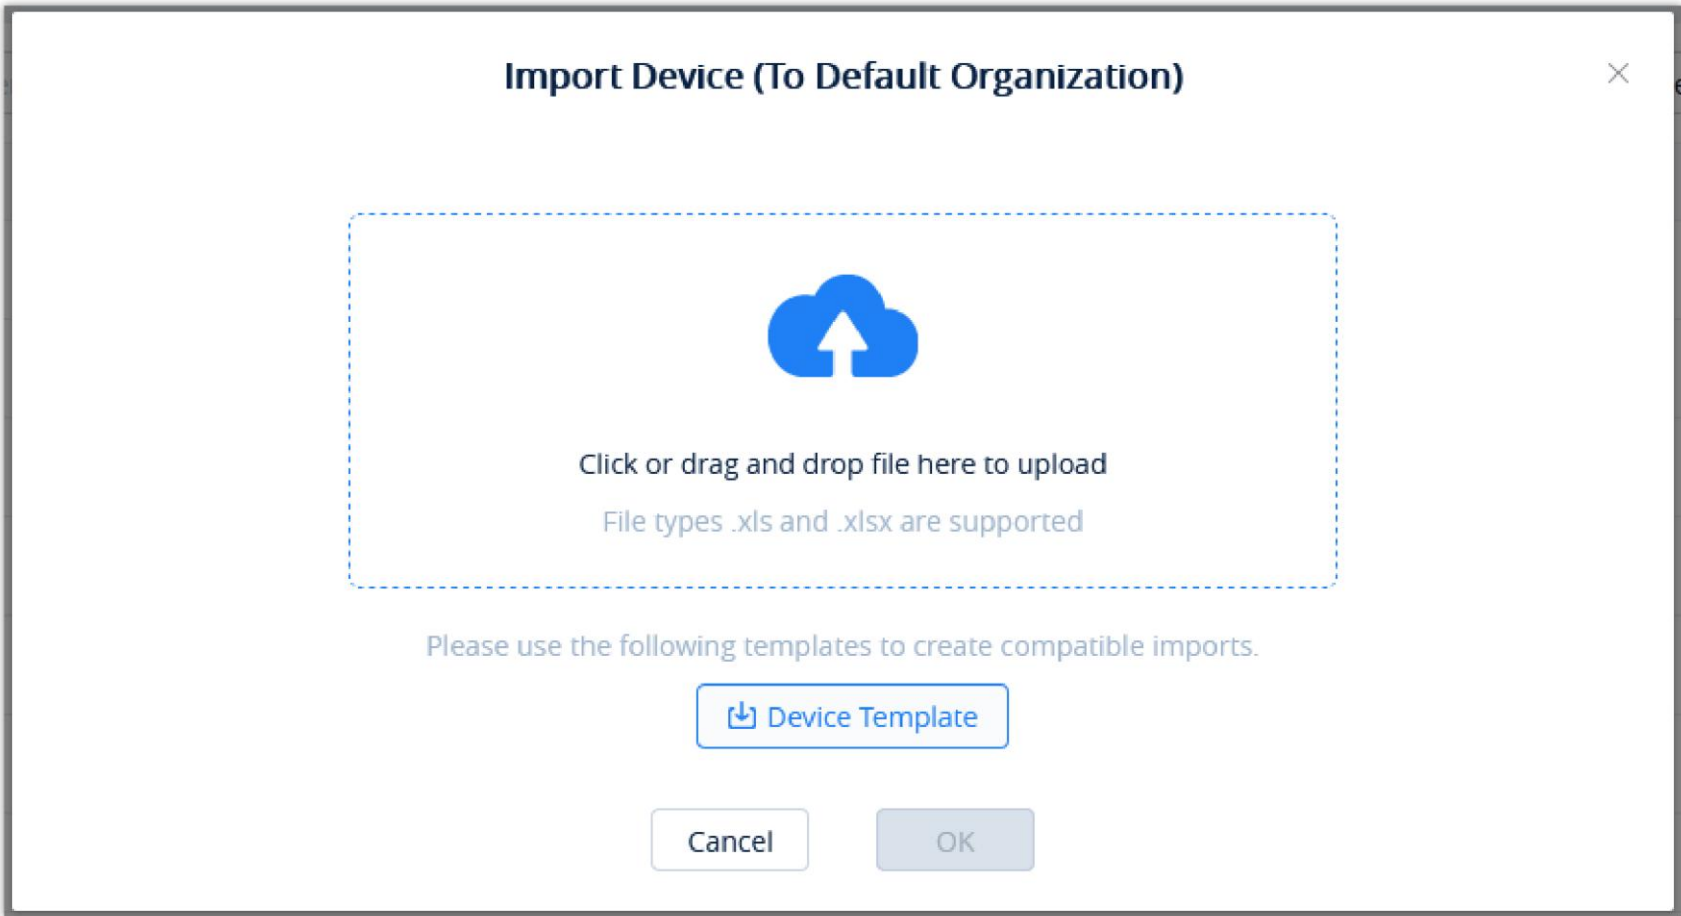

Import IPPBX Device

- Click on the



button to download the template. Users must follow the instructions to enter the required information.

- The template will have the following fields:

MAC Address	Users need to fill in the MAC address of the device in this field (Required). For instance, 000B82E21234, and it supports to fill “.” and “-” characters in this field.
Original Password	Users need to fill in the original password of the device in this field (Required). The original password can be viewed on the UCM’s case or LCD.
Device Name	This option is used to set the name of the device so that the users could identify this device (Optional). The maximum number of the input characters is up to 64.
Site Name	Enter the site to assign this device to (Required). If the site is under more than one level, all site levels must be included in the site name (e.g. first_level/second_level/.../new_site). If the site level does not exist, it will be automatically created. The maximum character limit is 64.

Import IPPBX Device Template


- Users can drag the file to the pop-up window, or they can click the upload button to select a file from their PC to import.
- Once the file is imported into GDMS, the result window will appear. If any data fails to import successfully, users can export the problematic data, re-edit, and attempt to import them into GDMS again.



- Currently, users can only add UCM63xx devices to the GDMS platform.
- When the device is added to the GDMS platform successfully, the SIP accounts in UCM63xx will be synchronized to the GDMS platform by default.
- If the user wants to turn off the synchronization function, please refer to the UCM63xx RemoteConnect Guide for details.
- If an existing device on GDMS is imported, the device’s existing information will be replaced with the newly imported information.
- If a device’s MAC address and serial number are invalid, the import will fail.

View Device Details

Click on the button to view a specific device’s system information.

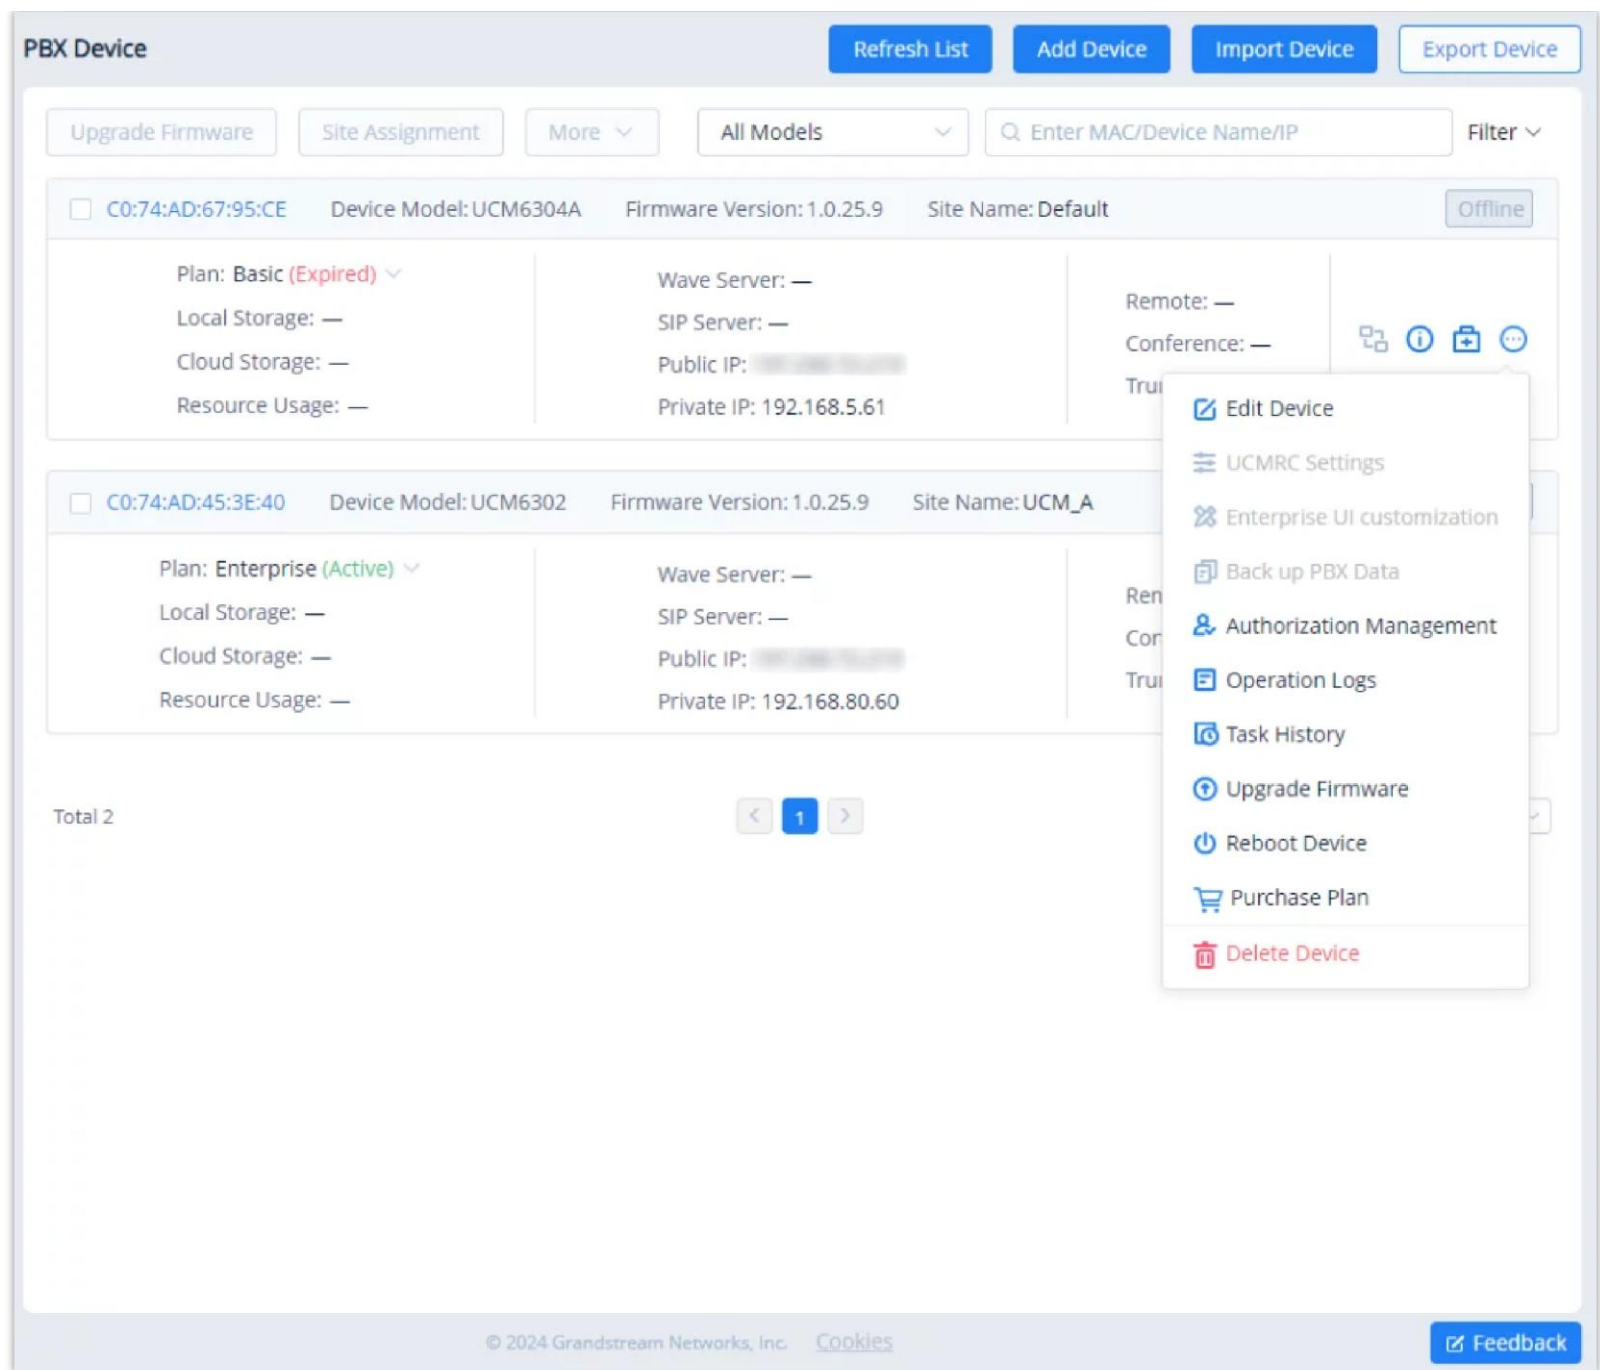


View IPPBX Device Details

In the UCMRC system, the user can quickly view all SIP server addresses in the Device List. For a certain SIP server address, the user can quickly view the advanced settings of the SIP server, including all advanced settings of the SIP server in the VoIP system.

i The information on this page is obtained from the device in real time. If the device is offline, the details page will be inaccessible.

View Device Plan

Select the plan for a specific IPPBX device to view the plan of the device, expiration date, currently used cloud storage space and total cloud storage space.

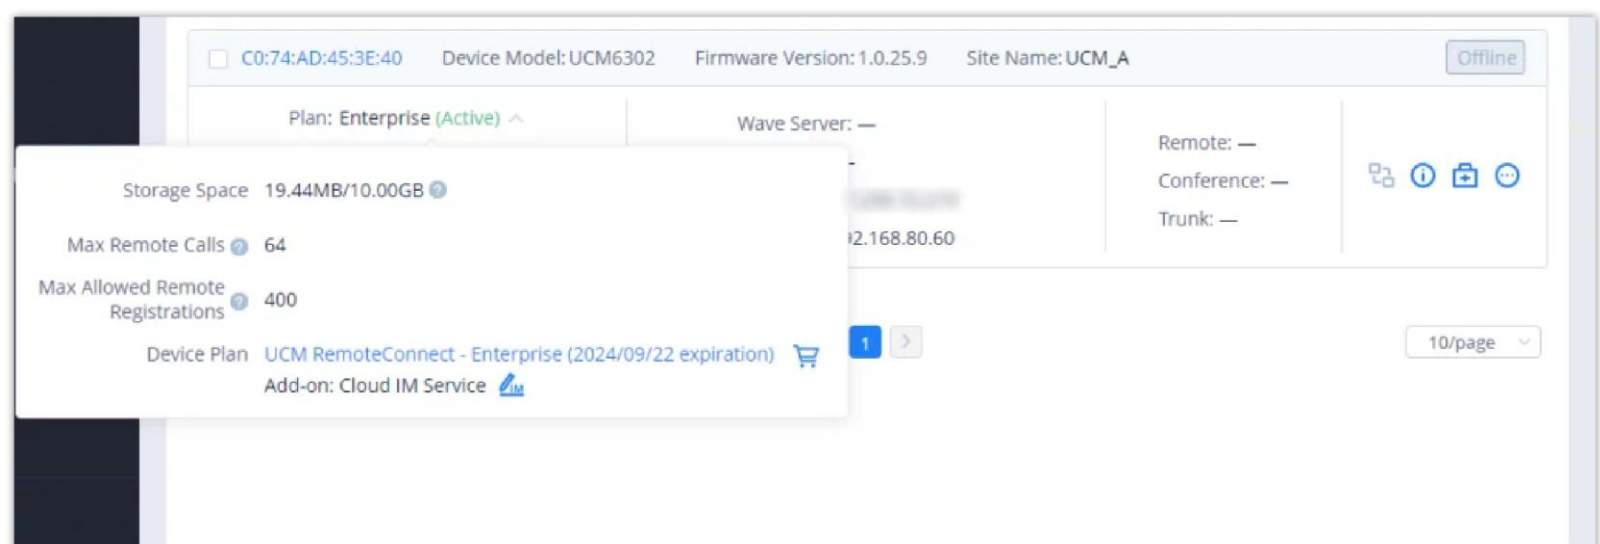

View IPPBX Device Plan

Access Server	This is used to configure Wave phones so that Wave users can connect to the IPPBX server and make calls at any time, anywhere on any network. If the user wants to configure the remote service address on the terminals for remote calls, the user can enable the button  and obtain the remote service address.
Storage Space	Refer to the current storage space used by the IPPBX device, and the total storage space of the IPPBX device. If there is not enough space, the backup files cannot be stored. The used storage space contains: – I Used storage space by cloud storage (excluding the space allocated to the Cloud IM service) – The maximum storage space allocated to the Cloud IM service
Device Plan	Refer to the current plan and add-on plan of the device. If the plan has expired, the user can only use the Basic plan as the current plan.

Remote Access to IPPBX Web UI

On the GDMS platform interface, even though the IPPBX is under the internal network, the user can remotely access the IPPBX Web UI through the external network for viewing data and configuration.

Prerequisite: The IPPBX device firmware version must be later than 1.0.15.1

1. Go to **UCMRC** → **On-Premise PBX** interface, click on the button




of the specific IPPBX device, as the screenshot shows below:




IPPBX List

2. Go to the IPPBX Web UI, and log in to the IPPBX device through the username and password, as the screenshot shows below:

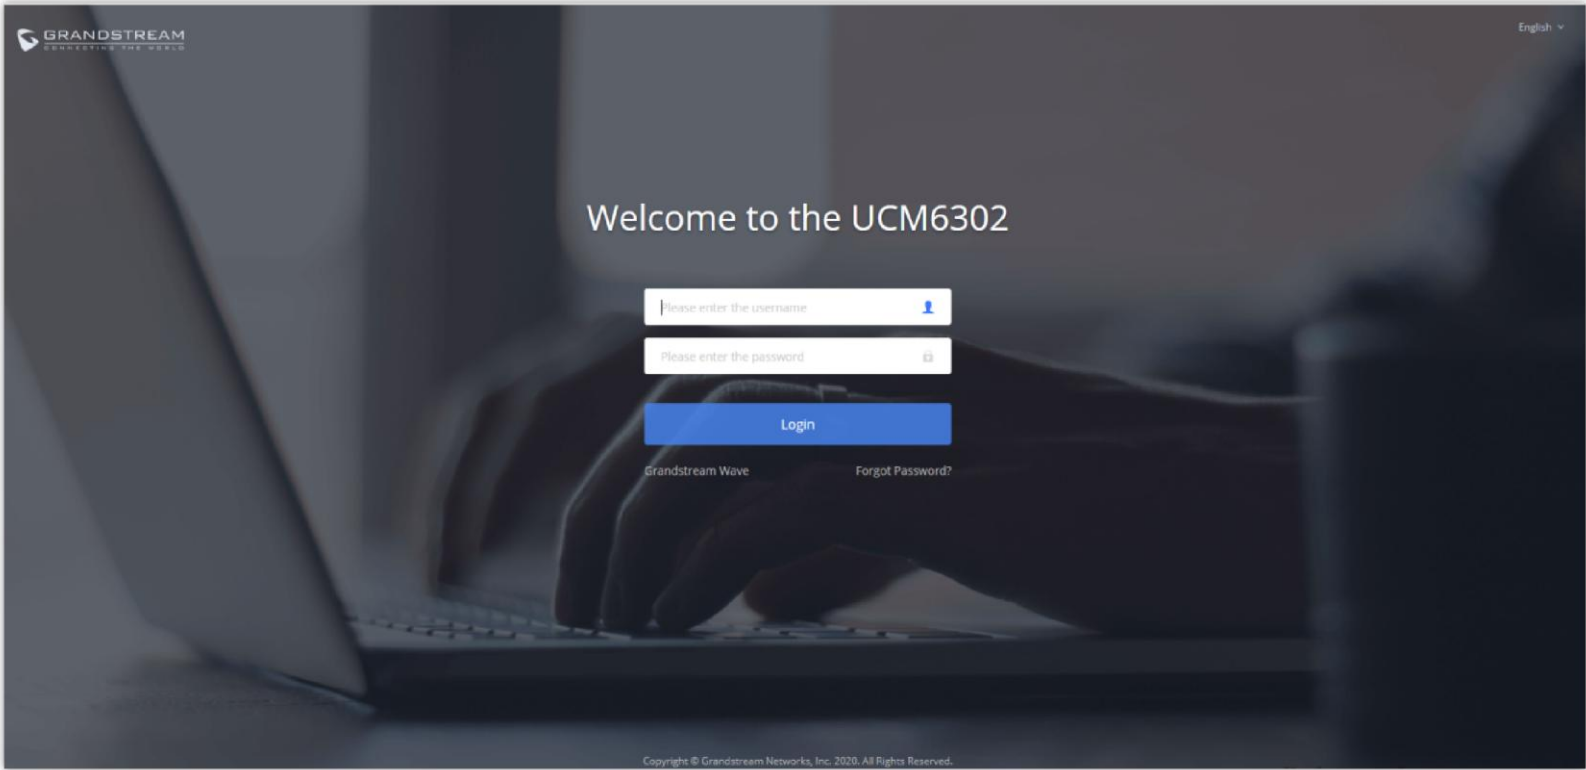

3. After logging in, the user can operate this IPPBX remotely by accessing the IPPBX device under the local network, as the screenshot shows below:

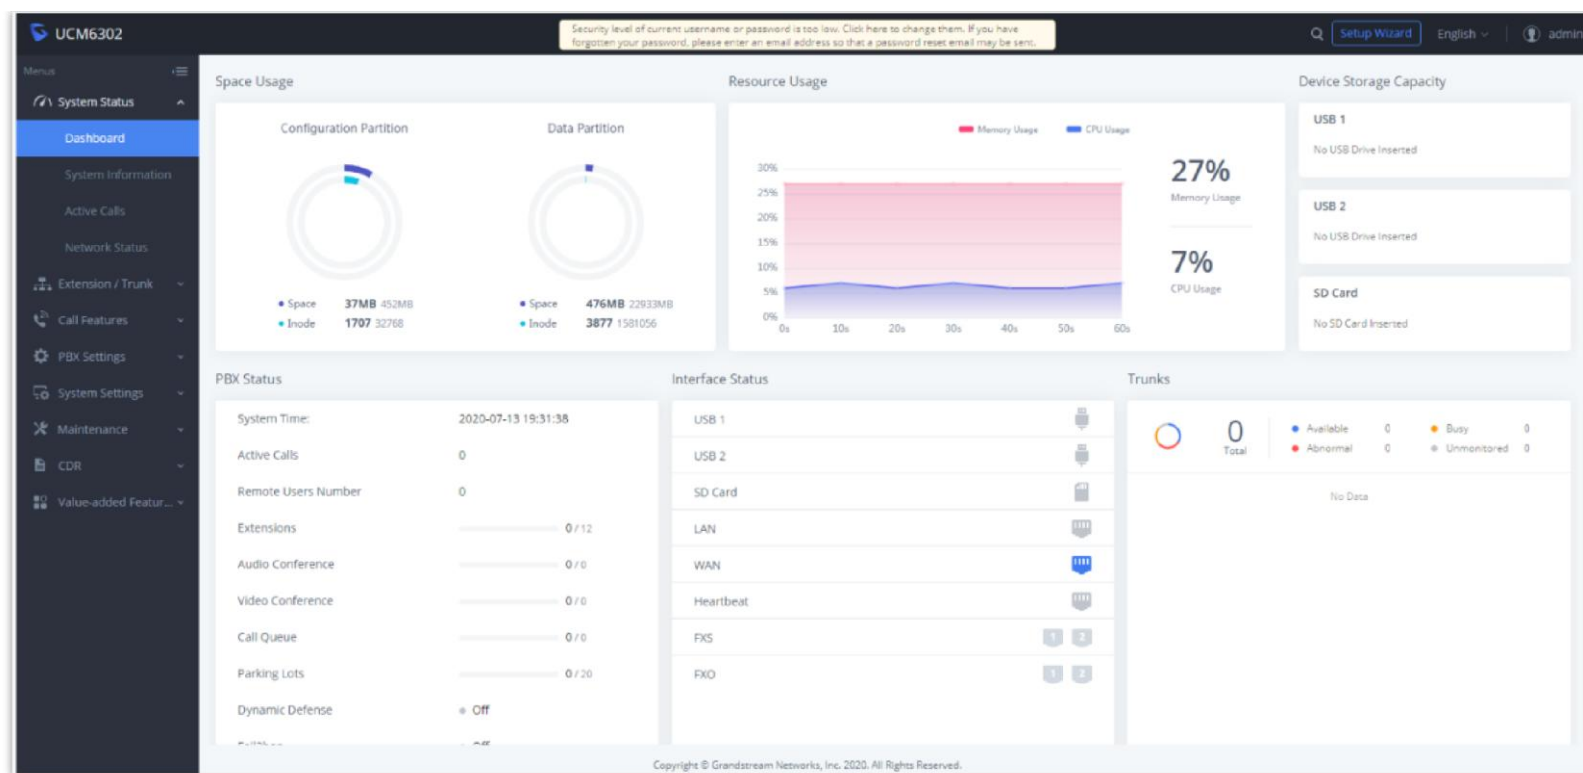

IPPBX Home Page

Notes

- Users do not need to configure the external network for IPPBX devices and access the IPPBX devices with encryption through the GDMS platform. However, the network environment of the IPPBX devices is allowed access through external networks.
- Users can assign permission that remote access to IPPBX Web UI without entering a password. Once the permission is assigned, the user can remotely access the IPPBX Web UI through the GDMS platform without entering the IPPBX password.


Remote Password Access

IPPBX Device Diagnosis

On the IPPBX Device list, users can click the Diagnosis button  following the IPPBX device to diagnose the IPPBX device, including UCMRC Connection, Ping/Traceroute, Syslog, Capture Trace, Network Diagnostics, and System Status.

IPPBX Device Diagnosis

If the IPPBX device that is using the UCMRC services has any problems, the user can diagnose the IPPBX device and troubleshoot the problems remotely. The user can try to fix the problems based on the suggestions and click on the **“Feedback”** button to send the logs and descriptions to our technical support.

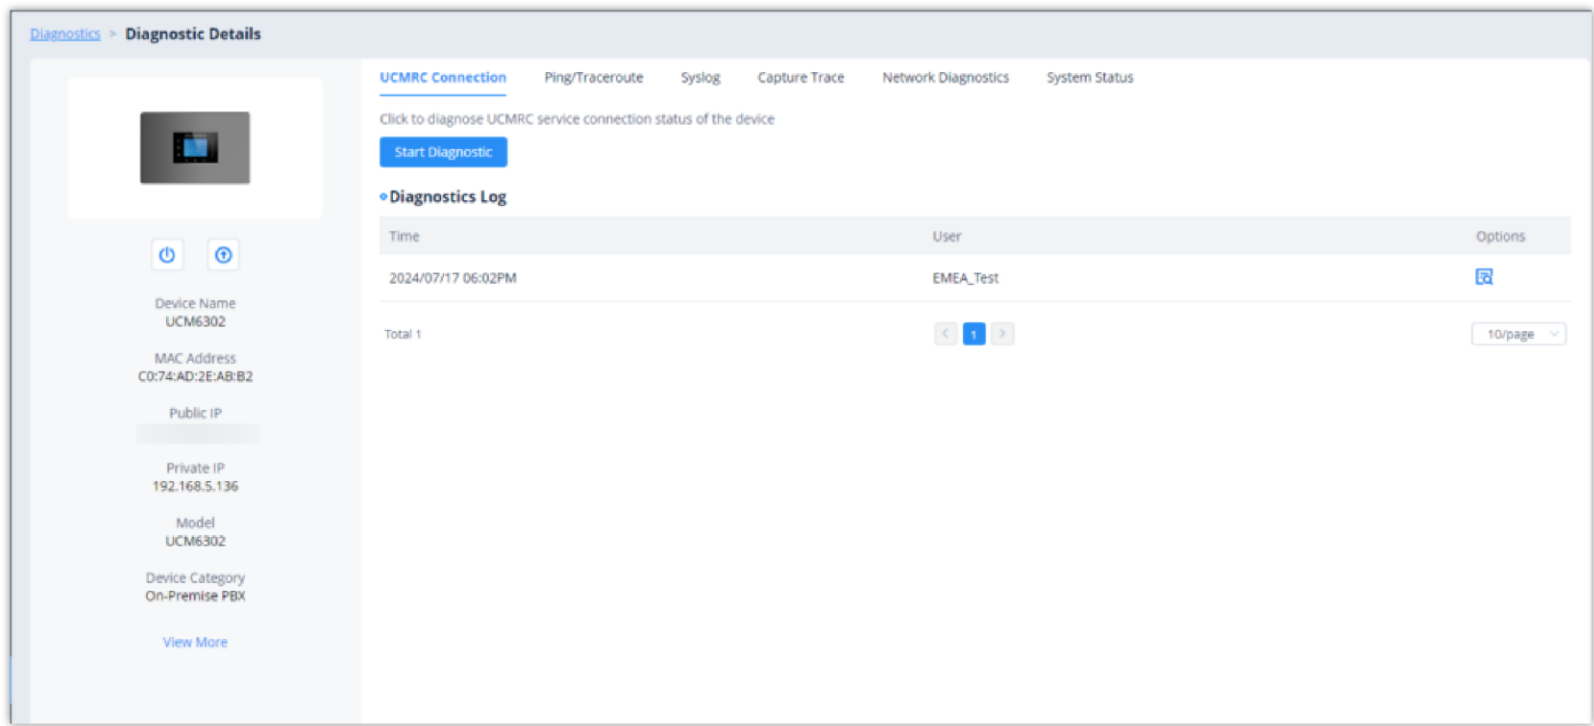

Diagnostic Details

View Statistics

Daily Report

Prerequisite: The IPPBX plan contains permission for this function.

The IPPBX device collects the data report of the day and sends it to the GDMS user or the configured email box.

Please refer to the screenshot below for the daily report email:

UCM Statistics Report 2022/05/29		
UCM Device MAC	00:0B:82:A4:6C:4B	
Device Time Zone	Etc/GMT-8	
Software Version	0.1.15.11	
Run Time	12days 14:6:27	
Device Storage	718.04MB/23.11GB	
Cloud Storage	0B/59.99GB	
Total Calls	0	
Remote Total	0	
Max Concurrent	0	
Number of Calls by Type	Audio Call	0
	Access Control Call	0
	Multimedia Meetings	0
	Surveillance Camera Call	0
	Video Call	0
Max Allowed UCMRC Registrations	—	
Max Allowed Local Registrations	GXP2160	1
	GXP2200	1
	GXV3240	1
	Wave Web	1

IPPBX Statistics Report

Statistics Time	The time of sending the data is displayed according to the local time zone of the IPPBX device.
Device	The MAC address of the IPPBX device is counted.
Time Zone	The local time zone of the IPPBX device.
Firmware Version	The current firmware version number.
Running Time	The running time displays the deadline for reporting the data.
Storage Space	By the reporting data time, it displays the usage of the local storage space of the device. If the usage reaches 80%, the indicator will be marked in red.
Cloud Storage Space	By the reporting data time, it displays the cloud storage space usage of the device. If the usage reaches 80%, the indicator will be marked in red.
Total Calls	The total number of calls on the reported day.
Total Remote Calls	The total number of calls made by the remote users on the reported day.

Max Remote Sessions	The maximum number of concurrent remote calls on the reported day.
Call Type Statistics	The distribution of all call types on the reported day.
Max Allowed UCMRC Registrations	The maximum number of remote registered extensions on the reported day.
Max Local UCMRC Registrations	The maximum number of local registered extensions on the reported day.
Max Time Per Remote Call/Meeting	The maximum call duration of the single remote call on the reported day. If the maximum call duration of the single remote call reaches 90% of the plan limitation, the value will be marked in red.
Aggregate Time for Remote Calls/Meetings	The total remote call duration on the reported day. If the total remote call duration reaches 90% of the plan limitation, the value will be marked in read.



- Some data are only available for data statistics in the premium plan.
- The daily report sending time is according to the 0 a.m. of the IPPBX local time zone.

View Statistics Report (Last 30 days)

Prerequisite: The IPPBX plan contains permission for this function.

1. Go to the **UCMRC → On-premise PBX**, then click on the MAC address of the specific IPPBX device and select the **“Statistics Report”** menu.
2. Users can only view the statistics report for the last 30 days. The reports will be sorted by the local time zone of the IPPBX devices, as the screenshot shows below:

View IPPBX Device Statistics Report

3. Click on the button Add Device Step 2

4

to view the type and amount of the connected device on the current day to the IPPBX device:

Number and device of bound extension account	
1.GXV3240	1
2.GXV3370	1
3.Wave/webrtc_chrome	1
4.Wave/webrtc_firefox	1

View Connected Devices TypeAmount

4. Click on button



to view the call type statistics of the current day:

Number of calls by type	
1.Audio Call	10
2.Audio Conference	0
3.Video Call	26
4.Video Conference	0

View Call Type Statistics

Set Daily Report Receiving Mailbox

Prerequisite: The IPPBX plan contains permission for this function.

GDMS platform will send a daily report email of the IPPBX device every day. Click on the button

 [Email Notification Settings](#)

on the **IPPBX** → **On-Premise PBX**, then click on the MAC address of the device, after that, click on the **Statistics Report** tab. Click on “Email Notification Settings” and configure the appropriate settings as shown below:

Email Notification Settings

Daily Email Notification ☒

Time Zone

(GMT) Coordinated Universal Time

* Send Time

🕒 08:00

Repeating

☒ Daily
☐ Every

Monday

☐ Per month

23Day

☐ Per month

Fourth

Monday

* Receiving Email Address

✕

+

 Add Email Address

Cancel

Save

Daily Email Notification	This is used to configure whether the user wants to send the daily report to the mailbox every day. If not, no mail notification will be sent, and users can view the statistics report on the GDMS platform.
Time Zone	This is used to set the time zone of the daily report.
Send Time	This is used to set the sending time of the daily report.
Repeating	This is used to set the repeating sending time of the statistical report. Once this configuration is set, the statistical report will be sent to the configured email box periodically.
Receiving Email Address	Supports entering any email address. Users can click “Add Email Address” to add multiple email addresses to receive the daily report.

View Operation Logs

Prerequisite: The IPPBX plan contains permission for this function.

Users can view all operation logs on the GDMS platform for the IPPBX devices.


- 1. On the IPPBX Device List, select the menu button



following the specific device, and click on the “**Operation Log**” button.

- 2. Operation logs include Remote accessing IPPBX Web UI logs, restarting logs, and firmware upgrading logs.

 Users could only view the device operation logs for the last 30 days.

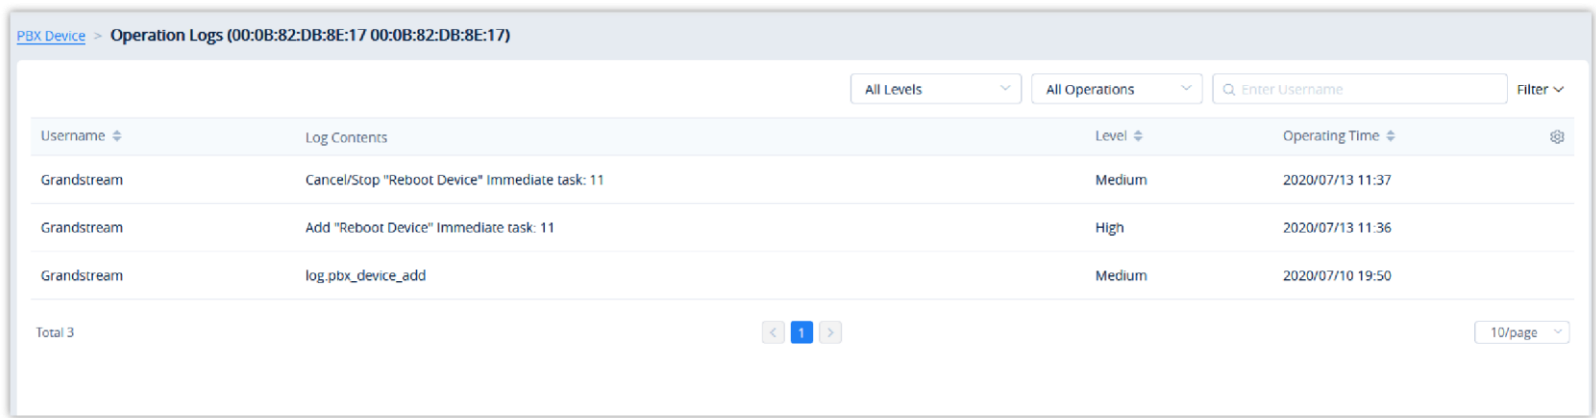

View IPPBX Device Operation Logs

Custom Remote Access Domain Name

Remote Access Domain Name is used to configure the Wave application so that Wave application can connect to the IPPBX server and make calls at any time, anywhere under any network environment.

Prerequisite: The IPPBX plan contains permission for this function.

You can also customize your domain to access the Wave Web RTC page/ IPPBX portal.

- 1. Go to **Device Management** → IPPBX Device interface, click the Edit Device option for the specific IPPBX device, and access the “**Device Edit**” menu.
- 2. If the user wants to configure this address on the soft terminals for remote calls, the user can click the button



and customize the remote domain address. Please see the screenshot below:

Edit Device

MAC Address00:0B:82:A4:6C:4B

Device Name<script>test</script>

* Site00:0B:82:A4:6C:4B

Remarks

Access Server

ZoneLos Angeles

Default Server Address000b82a46c4b.a.gdms.cloud

Switch to Custom Domain

* Custom Server Addresstestaaa.a.gdms.cloud

Cancel

Save

Device Edit Menu

3. Click on the **“Personal URL”** field, and enter the preferred URL, such as {yourdomain}.zoneb.gdms.cloud

* Custom server address

.zoneb.gdms.cloud

Custom IPPBX Remote Access Domain Name

4. If the plan has a custom domain name function, the user can click on the **“Custom Domain”** option and enter the server address with the private domain name, and the user also needs to enter the custom certificate of the domain name.

Note

The custom address needs to be resolved to the existing default server address (e.g. xxxxxxxx.zonea.gdms.cloud) using a CNAME DNS record , otherwise the custom address cannot be recognized, and Wave users cannot connect to the IPPBX device through the custom address.

* Custom server address

* Private secret key

* Public secret key certificate

Certificate chain

Enter Private Domain Name and Certificate

5. If the user needs to modify the information, the user can click on the button  to add a new custom server address.

6. Click on the “Save” button to apply the settings. Then, both the default server address and the new custom server address can be used.

! If the user modifies the custom server address, the phones or Wave applications that use the previous custom server address need to be re-configured with the new custom server address. Otherwise, the service cannot be used normally.

Synchronize IPPBX Device Alert to GDMS

Only the paid IPPBX Remote Control plans support synchronizing IPPBX device alerts to the GDMS platform. For IPPBX Remote Control plan details, please refer to our official website.

1. Users need to enable IPPBX alert notifications on the management platform of the IPPBX device. For details, please refer to the IPPBX User Guide on the IPPBX product page.
2. The alerts generated in the IPPBX device will be synchronized to the GDMS platform.
3. Users can view all IPPBX alert notifications in the GDMS platform and set the alert notification methods: Email Notification, Message Notification, or SMS Notification.

Set Parameters for SoftwareUCM/UCM63xx Series Devices

GDMS supports the creation of configuration templates for both SoftwareUCM and UCM63xx series devices. These templates can be applied in the following ways:

- To individual or multiple sites.
- To a group of IP-PBX devices.

For detailed information on how templates operate and their application scopes, please refer to the [\[By Model\]](#) and [\[By Group\]](#) sections of this user manual.

To create a configuration template for SoftwareUCM/UCM63xx, follow one of the options below based on your desired deployment scope:

1. Via the Device Template Section:
 - Navigate to **Device Template** → **By Model** to create a model-specific template.
 - Navigate to **Device Template** → **By Group** to create a group-based template.
2. Via the On-Premise PBX Tab:
 - After the SoftwareUCM/UCM63xx device is added to GDMS, locate it under the **On-Premise PBX** tab.
 - Click “**Set Parameters**” for the device to edit its configuration elements.

On-Premise PBX > **Set Parameters (C6:10:01:00:00:63)**

Extension/Trunk 2

Advanced Call Features

PBX Settings

System Settings

Enter Name/P-value

Extensions 2

VoIP Trunks

Outbound Rule

Outbound Blacklist

Inbound Rule

Basic Settings

☒ Enable Basic Settings

Add

Delete

☐

Extension

Extension Type

Call Privileges

Password

User/Wave Password

Options

No Data

Features

☒ Enable Features

Add

Delete

☐

Auto Record

Options

No Data

Voicemail

☐ Enable Voicemail

Add

Delete

Voicemail

Voicemail Password

Options

No Data

Back


Save

© 2025 Grandstream Networks, Inc.

[Cookies](#)

CloudUCM Configuration Template

The diagram below displays the available parameters that can be configured for both UCM63xx and SoftwareUCM devices.

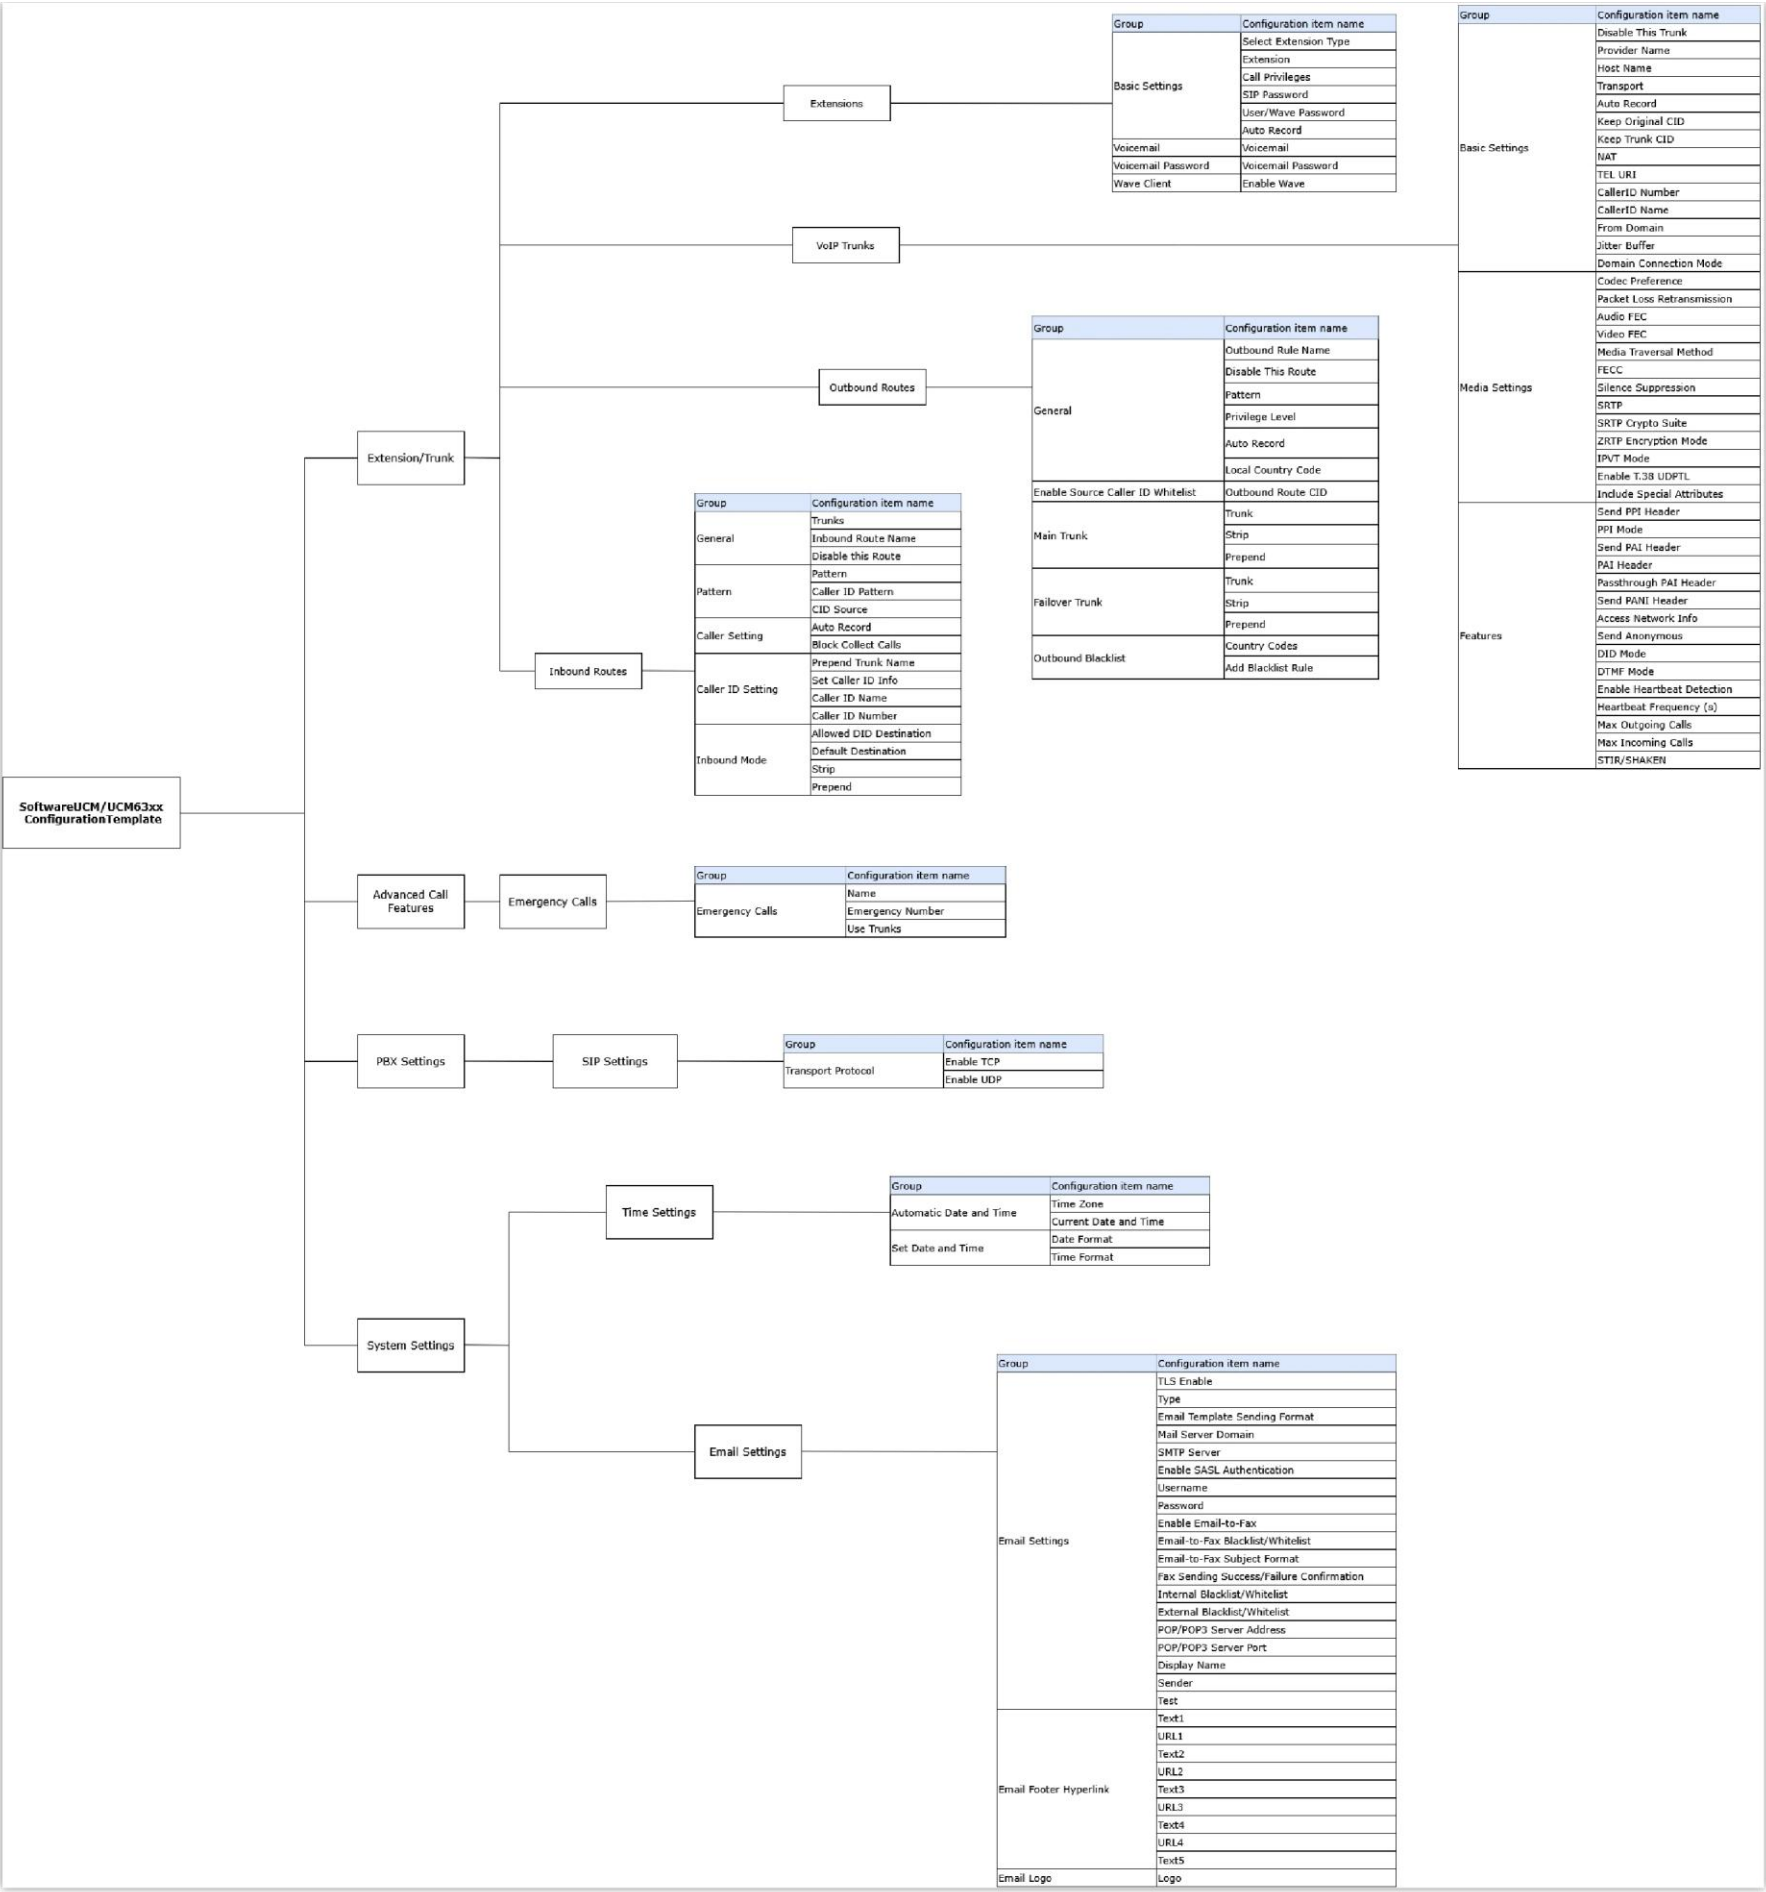

SoftwareUCMUCM63xx Template Configuration Parameters

Reboot Device

Users can reboot IPPBX devices from GDMS instantly or set up a schedule to reboot the IPPBX devices.

1. Select an IPPBX device from the **GDMS → Device → IPPBX Device** page, and click on **“Reboot Device”**. Or select multiple IPPBX devices by clicking **More → Reboot Device**.
2. The users can select to reboot the device immediately or set up a schedule to reboot the device. For a scheduled reboot, please select the start and end times of the task. Reboot will be performed during this period.

Reboot Device

Tip: The device in the call will restart after the call ends

Task Time ☐ Immediate ☒ Scheduled

* Task Name

* Run Time

Cancel

Save

Reboot IPPBX on GDMS

3. After saving the reboot configuration, users can view the status of this task from the **GDMS → Task** page.


 If the task is failed, the GDMS platform will send the system notification to the user.

Upgrade Firmware

Prerequisite: The IPPBX plan contains permission for this function.

Upgrading IPPBX firmware via GDMS is supported. Please note there must be IPPBX official firmware or customized firmware available on the GDMS platform first.

1. Select an IPPBX device from **GDMS → Device → IPPBX Device** and click on **“Upgrade Firmware”** as shown in the below picture. Users can also select multiple IPPBX devices and then click on **“Upgrade Firmware”** to perform a batch upgrade for all selected IPPBXs.

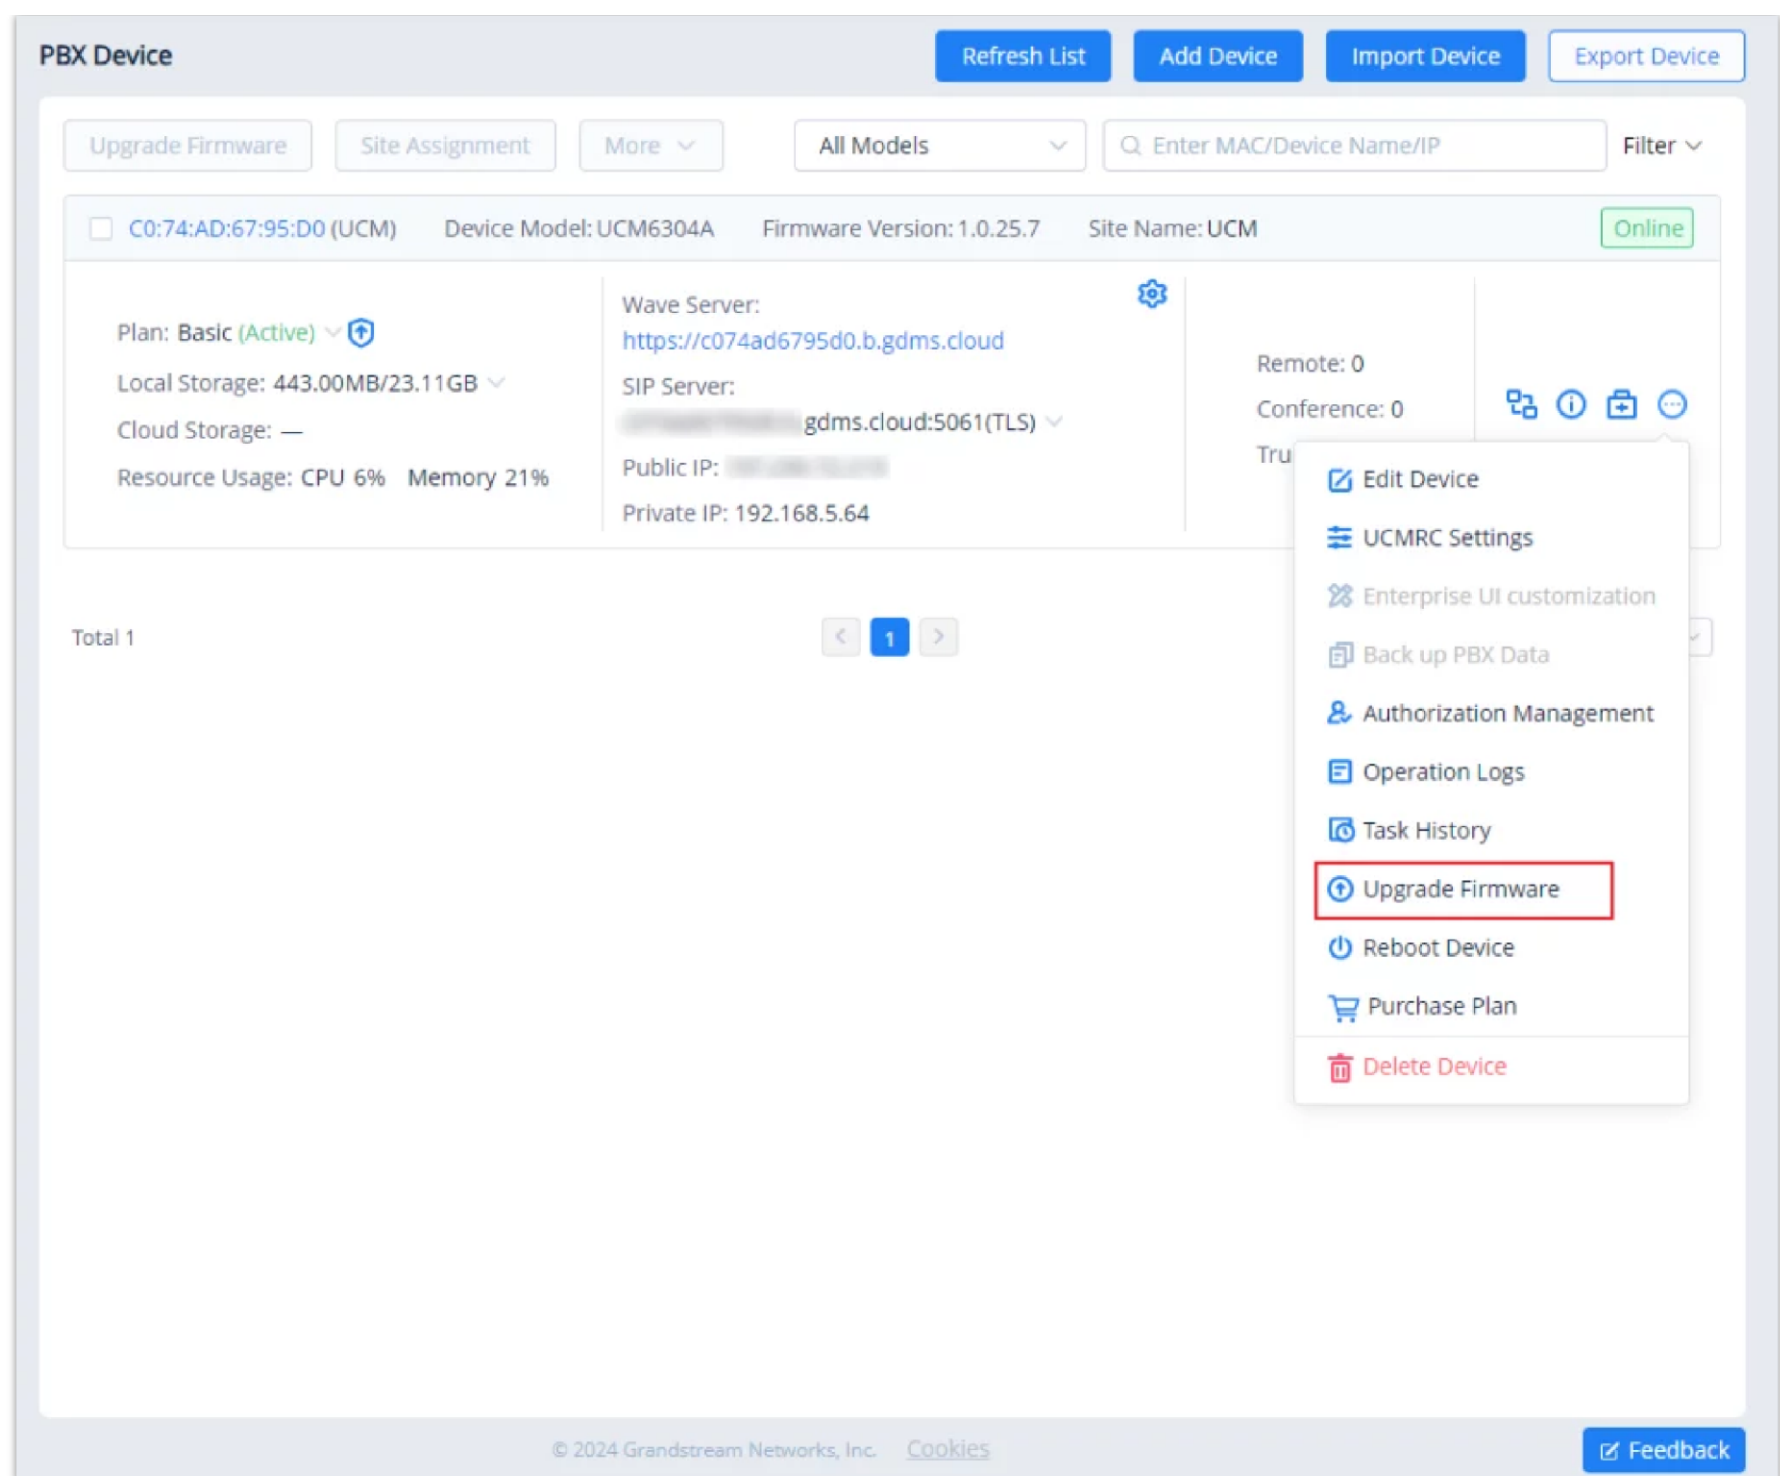

IPPBX Devices Listed in GDMS

2. Select upgrade immediately or set up a schedule to perform the upgrade. For scheduled upgrades, please select the start and end times of the task. The upgrade will be performed during this period.

The screenshot shows the 'Upgrade Firmware' configuration dialog box. It has a title bar with 'Upgrade Firmware' and a close button. The form contains the following fields:

- '* Firmware Version' with a dropdown menu showing 'Select'.
- 'Task Time' with two radio buttons: 'Immediate' and 'Scheduled' (selected).
- '* Task Name' with a text input field containing 'Enter Task Name (up to 64 characters)'.
- '* Run Time' with a date and time range selector showing '2020-07-13 12:10' to '2020-07-13 23:59'.

 At the bottom of the dialog are 'Cancel' and 'Save' buttons.

Upgrade Firmware Configuration on GDMS

3. Save the configuration. Then the users can view the task status under the GDMS **Task** page.

i If the task is failed, the GDMS platform will send the system notification to the user.


Edit Device

Users could edit the IPPBX Device name and which site the device belongs to.

1. In the device list, click on the button



to **Edit Device** to access the device editing page.

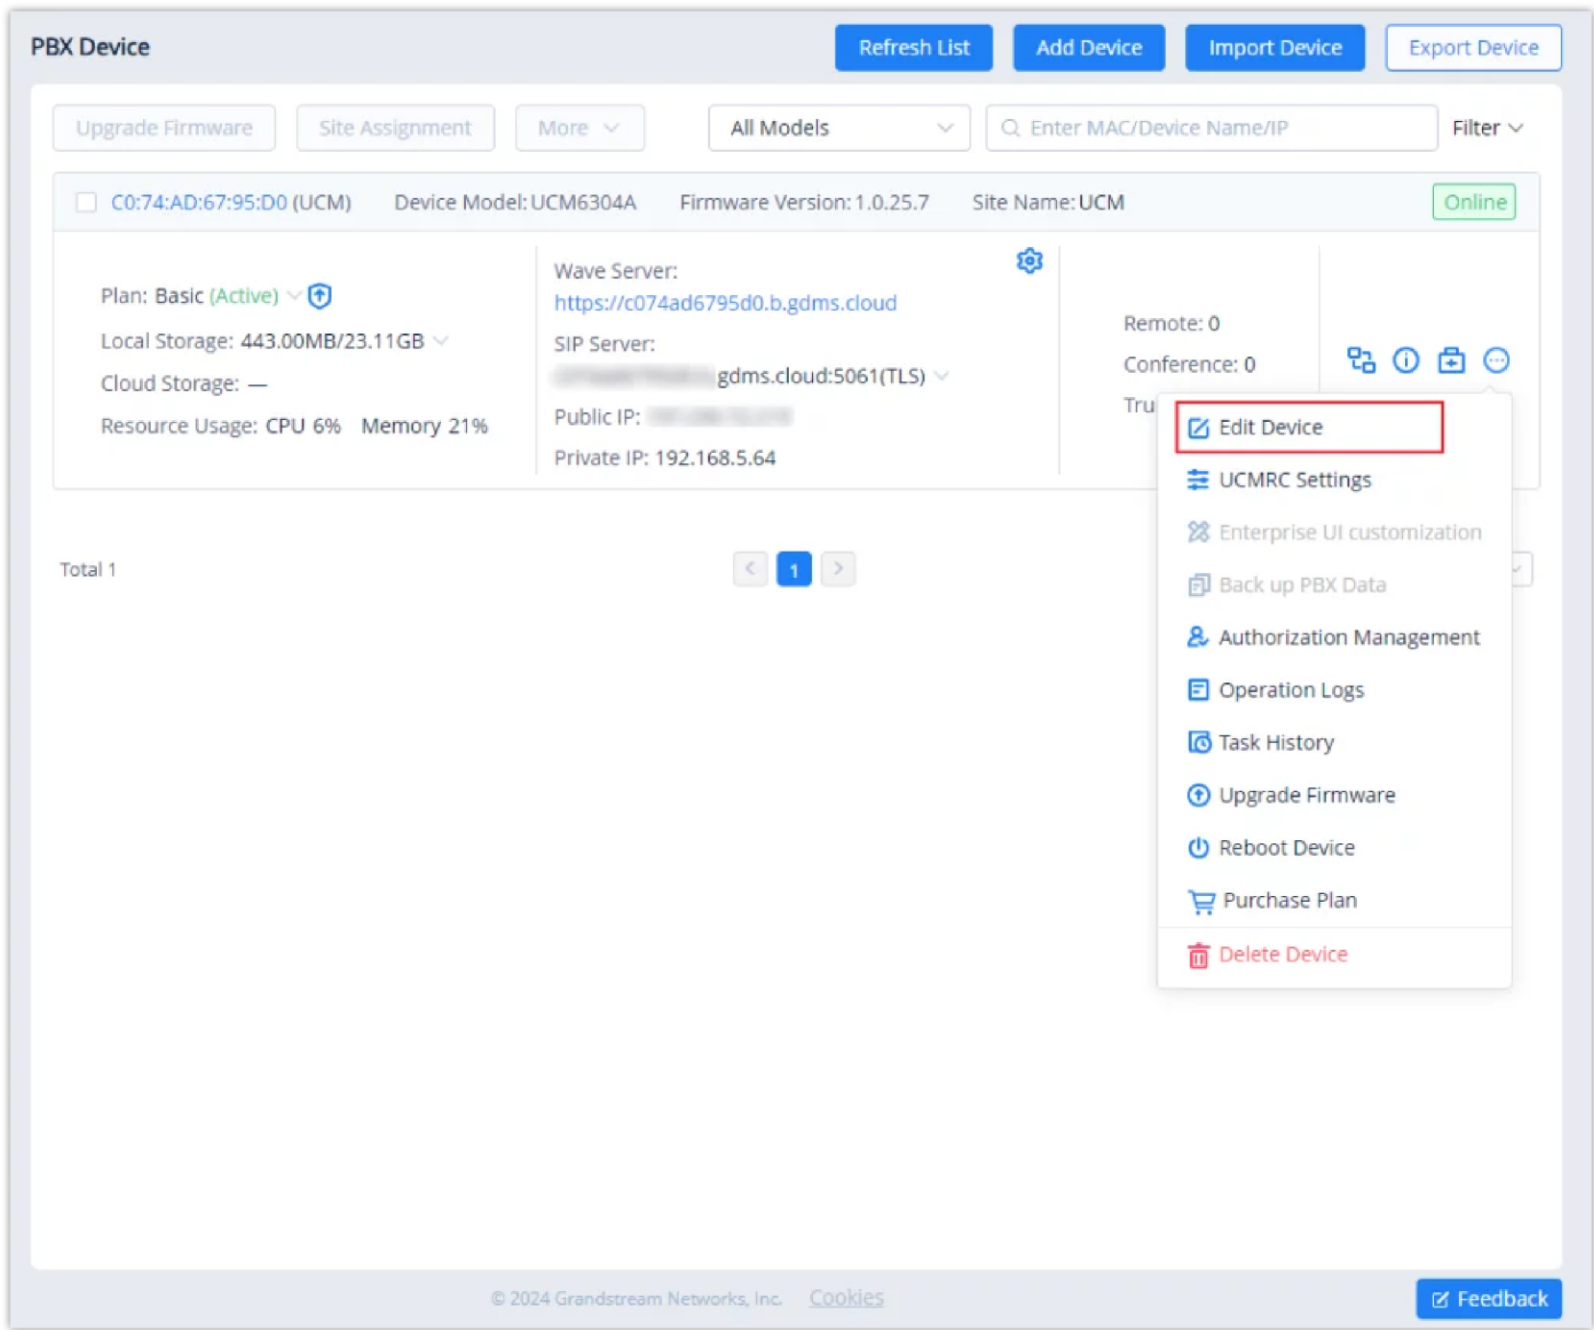

Edit IPPBX Device Option

2. Users will see the device editing page as the figure shows below:

me

els

5.a.

5.a.

d:50

Feb

1

<

>

×

Edit Device

MAC Address

00:0B:82:A4:6C:4B

Device Name

<script>test</script>

* Site

00:0B:82:A4:6C:4B

▼

Remarks ?

↺

Access Server ?

☒

Zone

Los Angeles

▼

Default Server Address

000b82a46c4b.a.gdms.cloud

↺ Switch to Custom Domain

* Custom Server Address

testaaa

.a.gdms.cloud

×

Cancel

Save

Edit Device

- If the plan has the custom server address function, the user can click "**Personal URL**"; If the plan has permission to custom private domain name function, the user can click on the "**Custom Domain**" option to configure it.
- Click on the "**Save**" button to apply the changes on the GDMS platform.

! After modifying the GDMS server region, the GDMS platform system will generate a new Access Server address, and the Wave users and the phones which are not connected to the GDMS platform need to be configured with the new Access Server address manually. If the user is using the Custom Domain, the user does not need to update the address.

UCMRC Settings


Prerequisite: The user has the corresponding UCMRC plan including this function.

The user can remotely access the PBX device to set the plan of the UCMRC service.

- In the IPPBX Device list, the user can select the IPPBX device which the user prefers to access and click




button to set the IPPBX device.

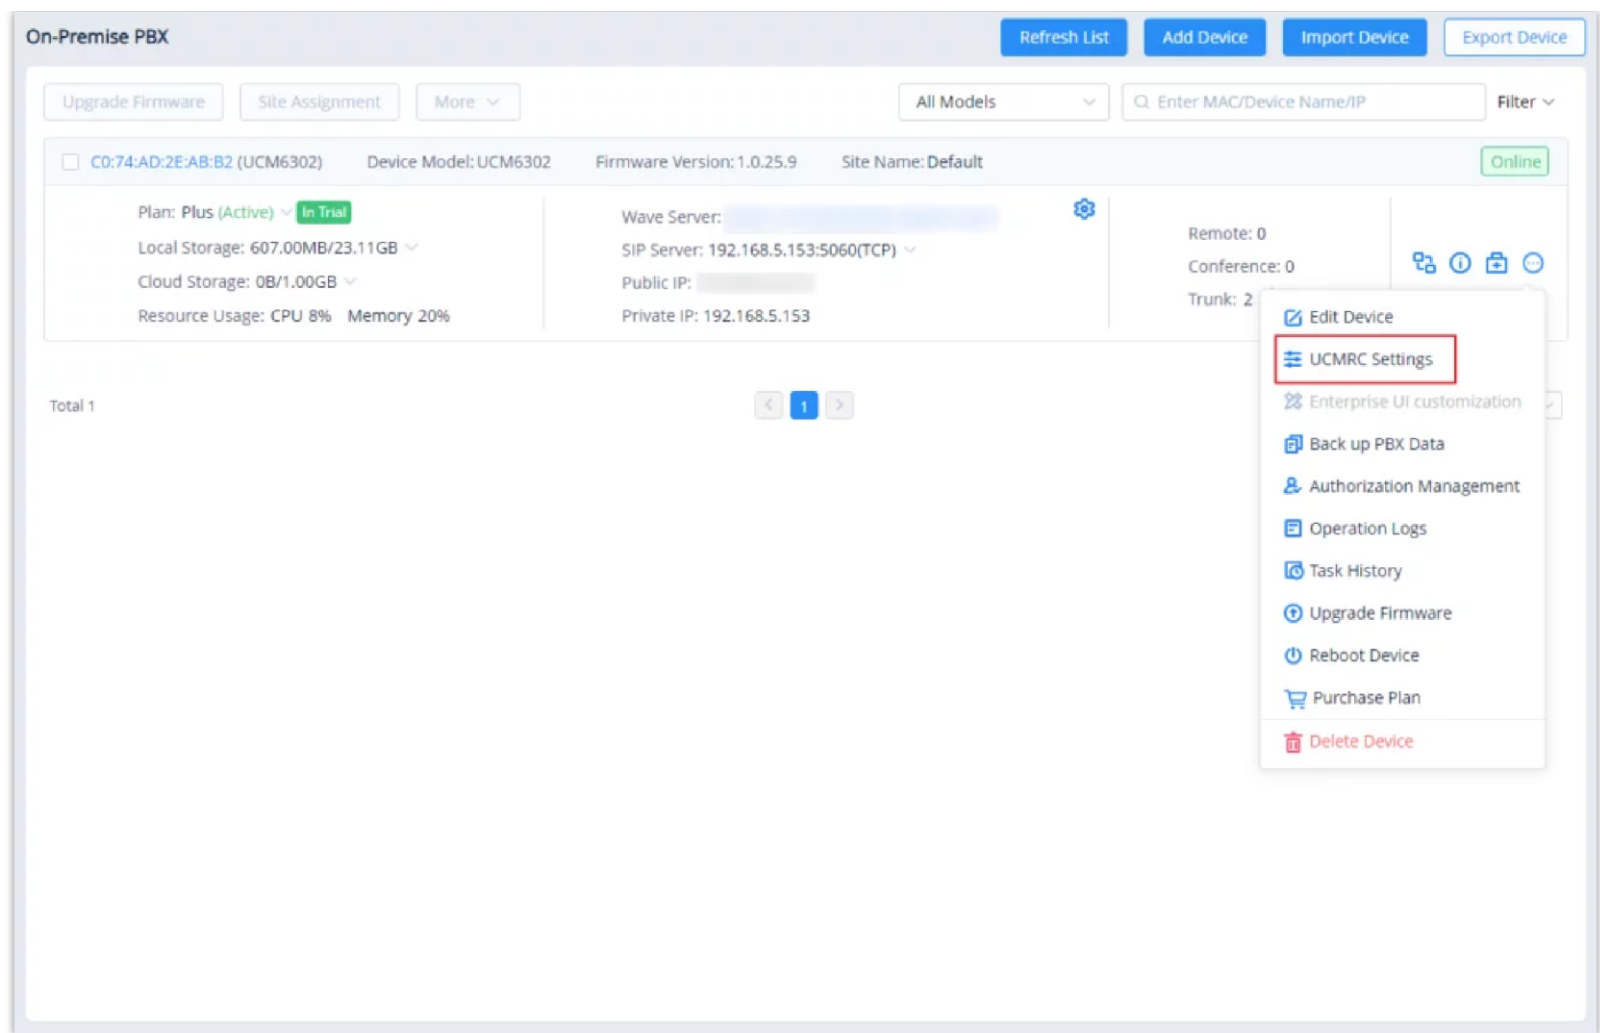

UCMRC Settings Interface

2. After clicking the UCMRC Settings button, the user will be directed to the IPPBX Web UI remotely.
3. The user will be directed to the **IPPBX Web UI > UCM RemoteConnect > Plan Settings** interface. As the screenshot shows below:

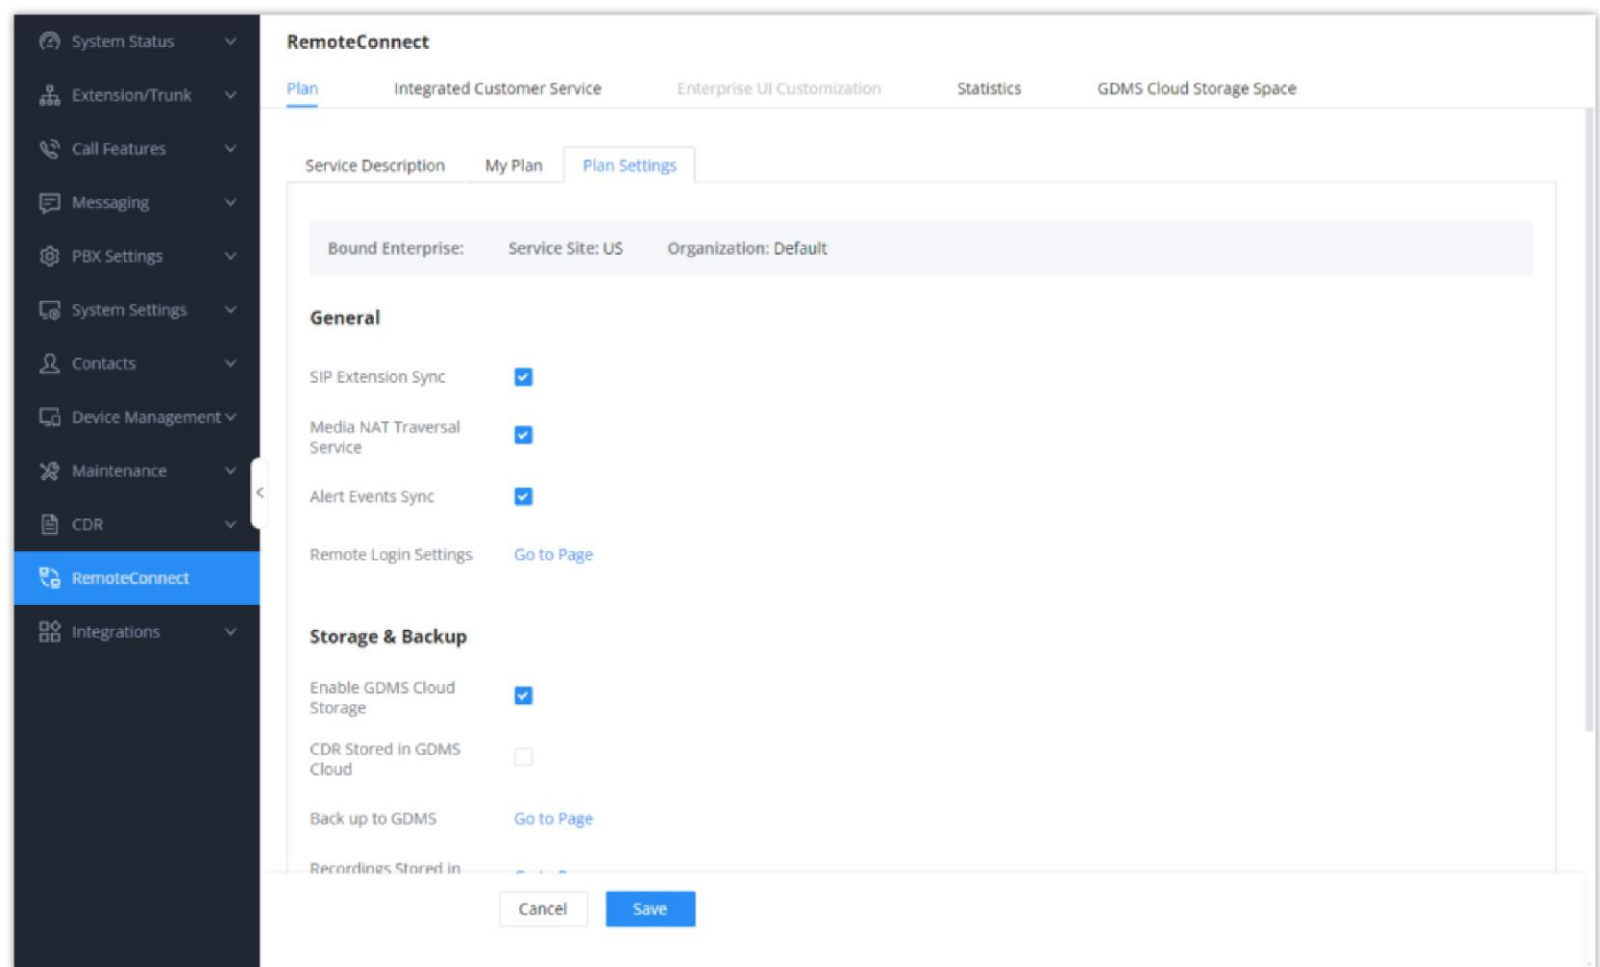

Plan Settings for UCMRC

Enterprise UI Customization


Prerequisite: The user has the corresponding UCMRC plan including this function.

The user can remotely access the IPPBX device Web UI to customize the enterprise logo.

1. In the IPPBX Device list, the user can select the IPPBX device that the user prefers to customize the logo and click




button to access the IPPBX Web UI.

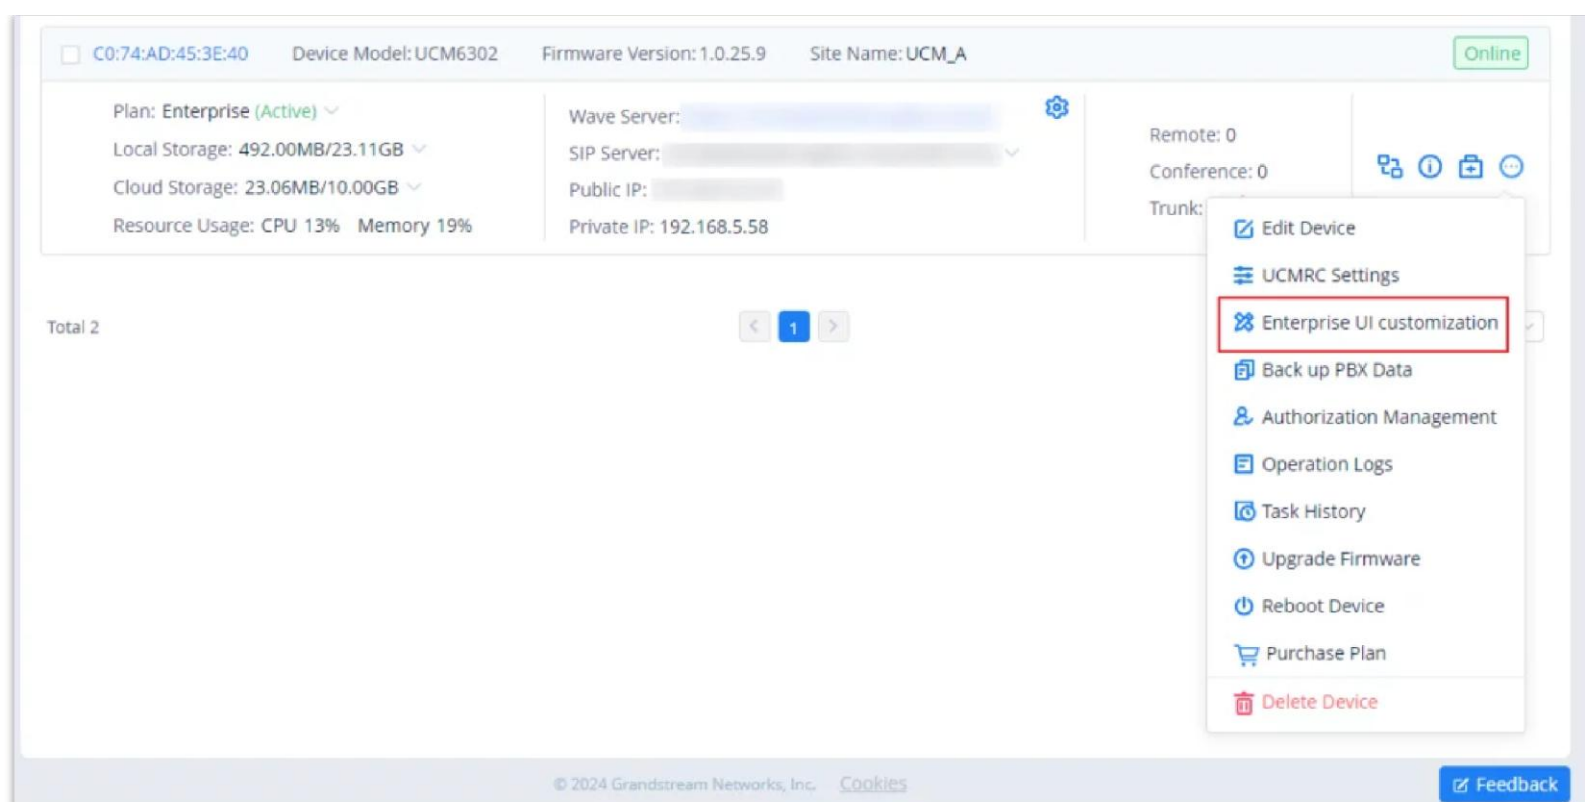

Custom Enterprise Logo Interface

2. After clicking the custom logo button, the user will be directed to the IPPBX device Web UI.
3. The user will be directed to the IPPBX Web UI → UCM RemoteConnect → Custom Logo to customize the enterprise logo.
As the screenshot shows below:

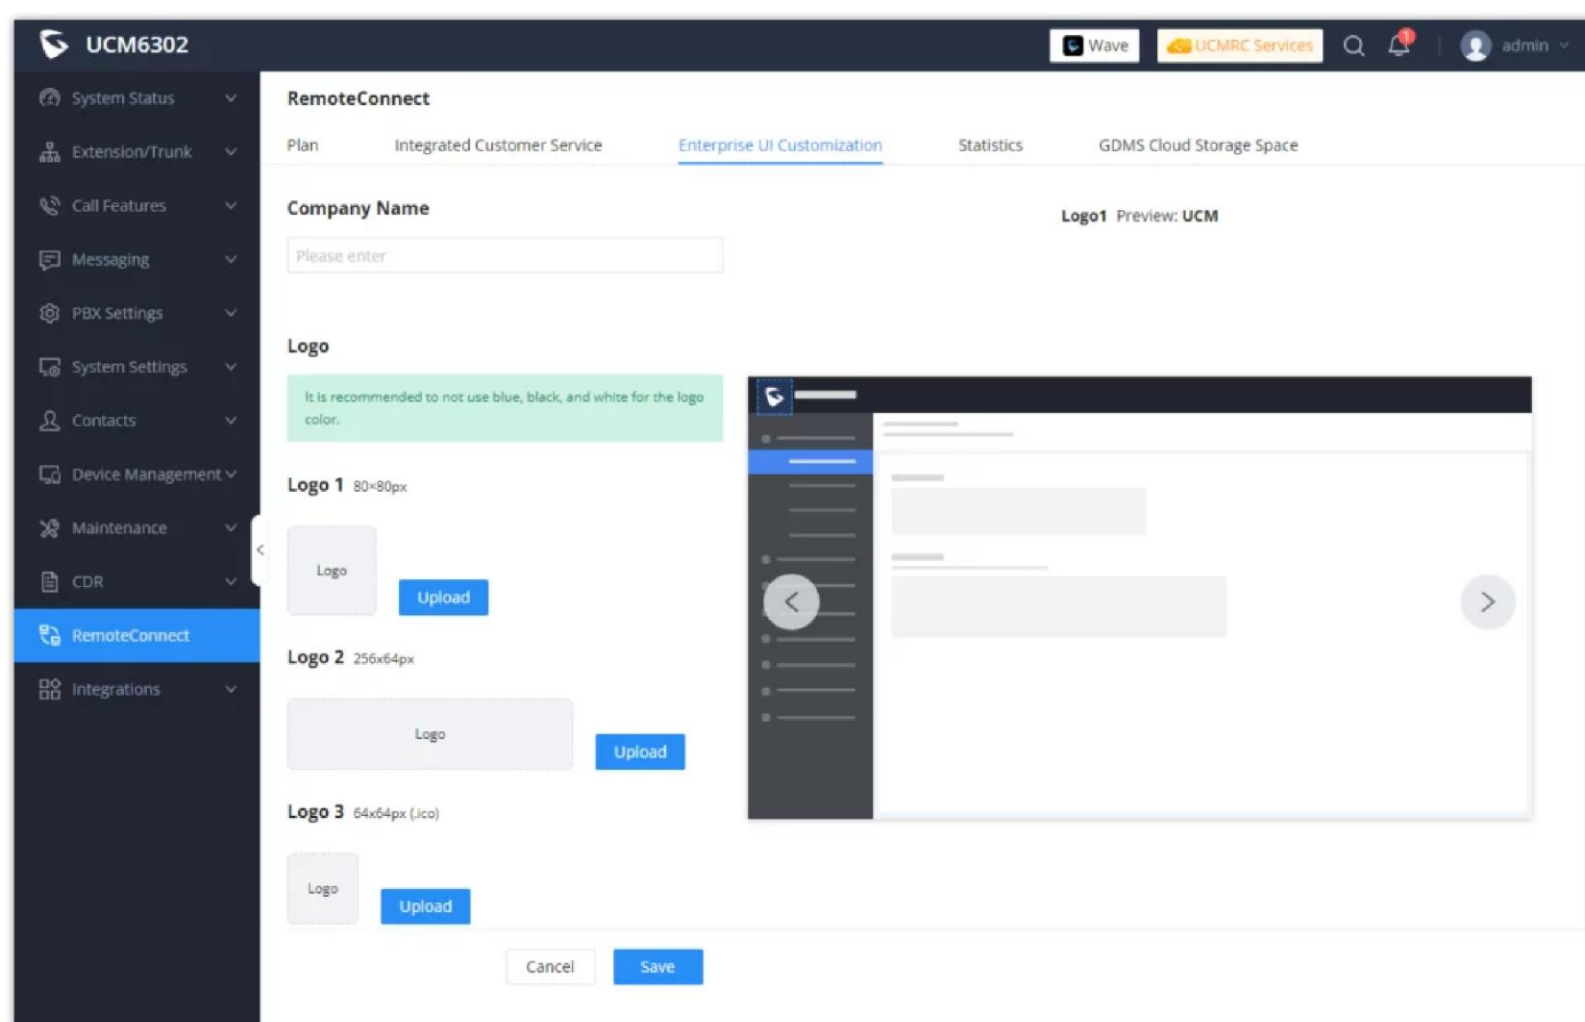

Custom Logo

Back up IPPBX Data


Prerequisite: The user has the corresponding UCMRC plan including this function.

The user can remotely access the IPPBX device to enable the IPPBX data backup function.

1. On the IPPBX Devices list, the user can select the IPPBX device, click the button




to access the IPPBX Web UI, and set the IPPBX data backup function for the GDMS platform account.

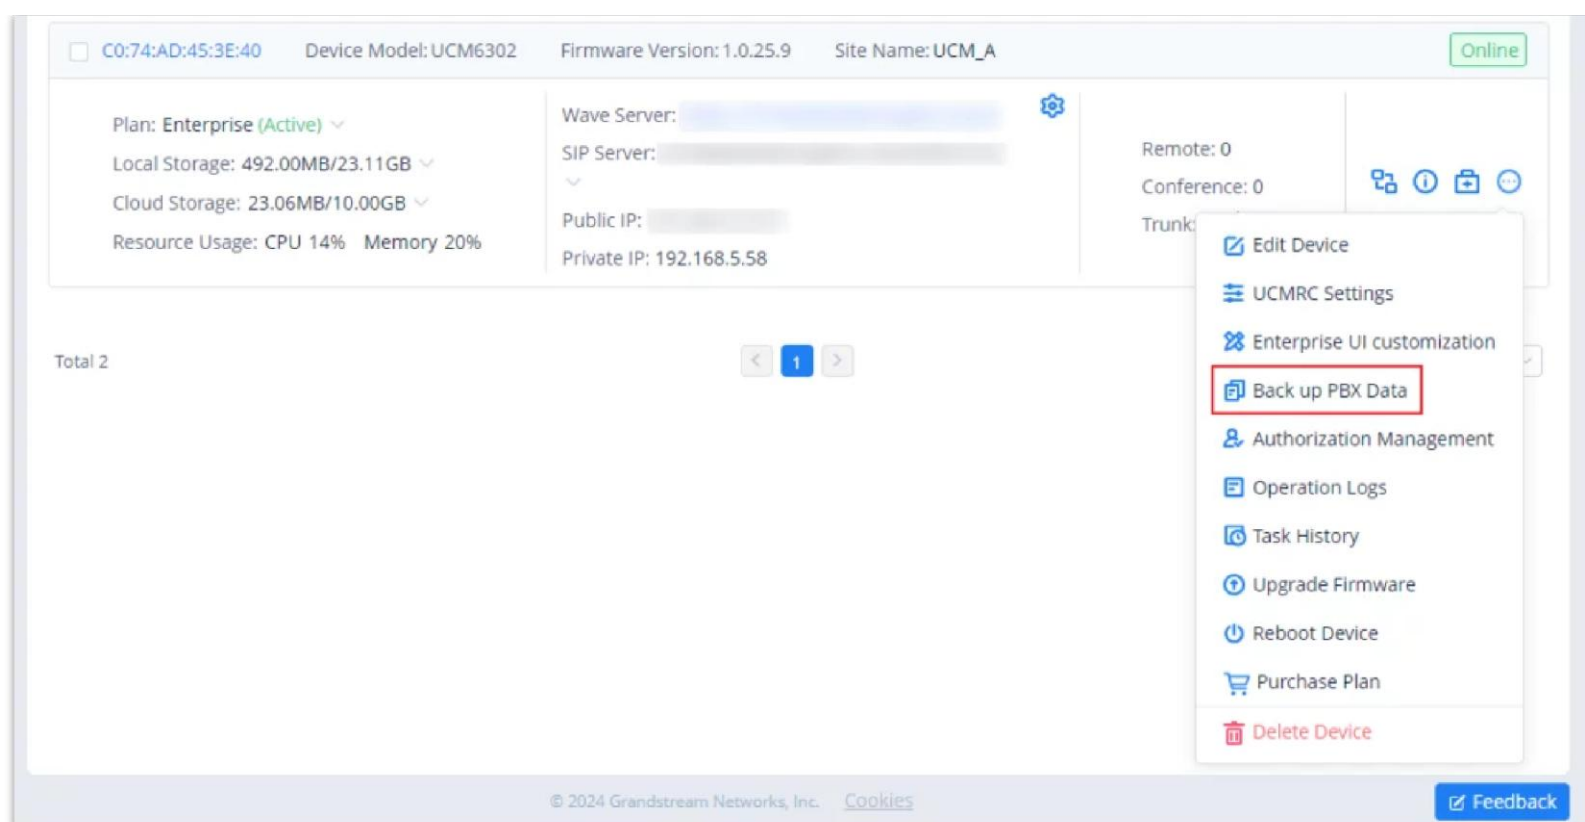

Back up IPPBX Data

2. After clicking the IPPBX data backup button, the user will be directed to the IPPBX device Web UI.


3. The user will be directed to the IPPBX Web UI, **RemoteConnect** → **Plan Settings** → **Storage & Backup** interface and set to back up the IPPBX data to the GDMS platform account. Please see the screenshot below:

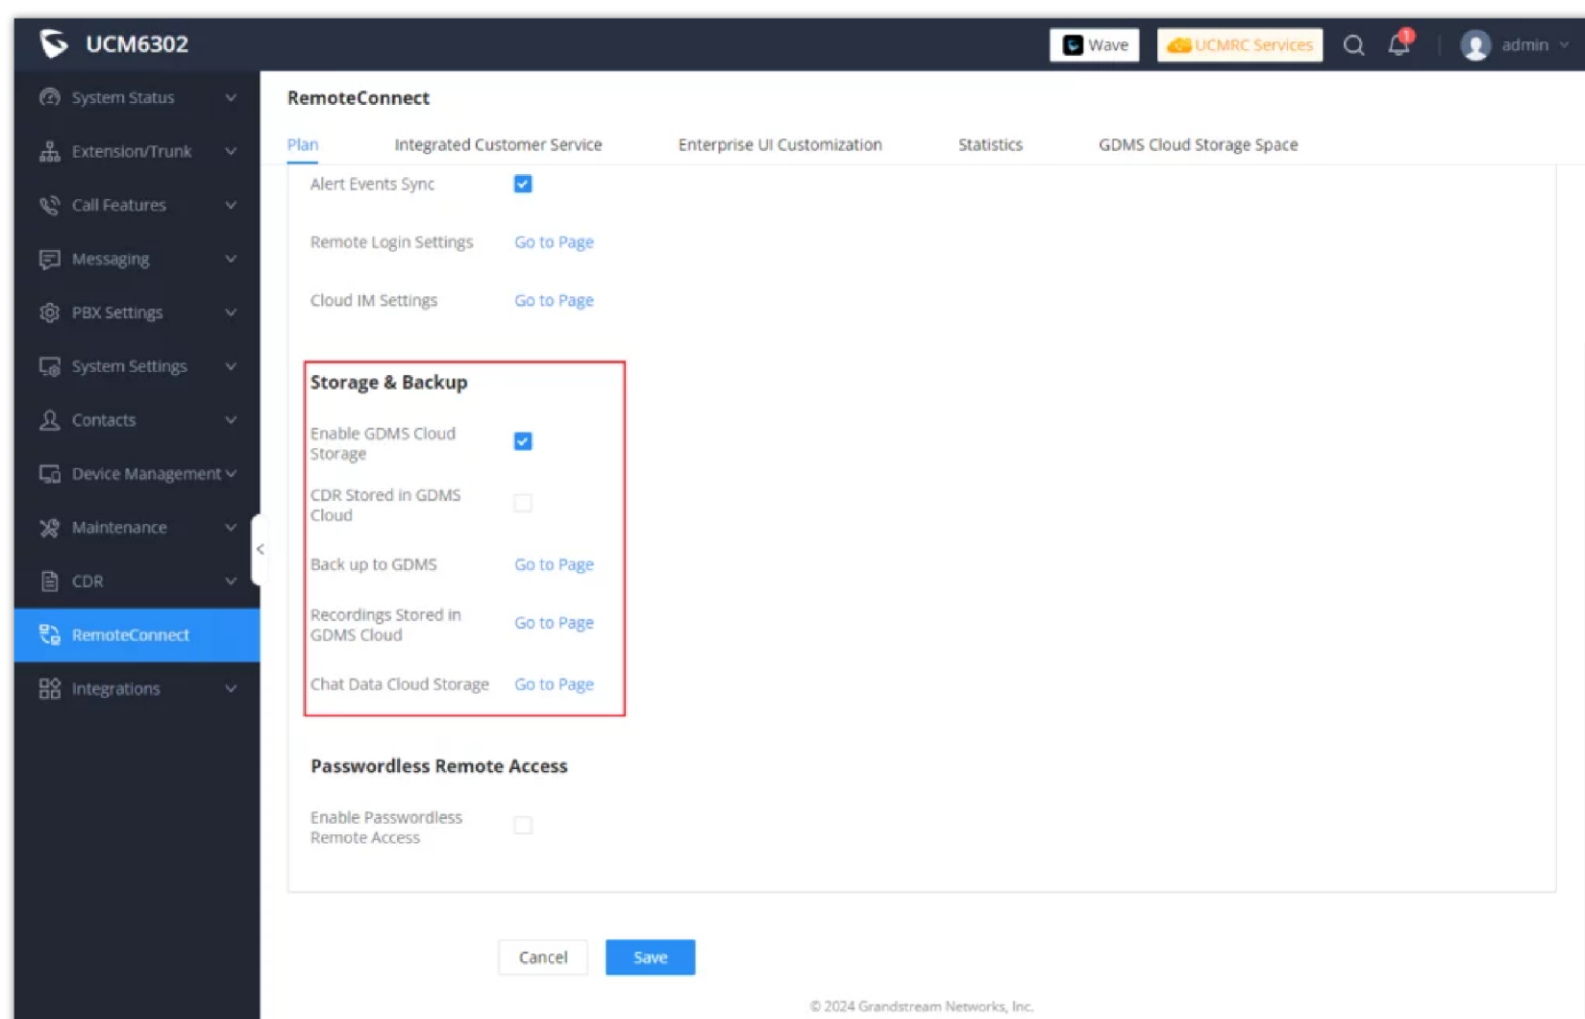

Storage Backup

Synchronize extensions to GDMS


This feature allows users to sync the created extensions on the IPPBX device into the GDMS account,

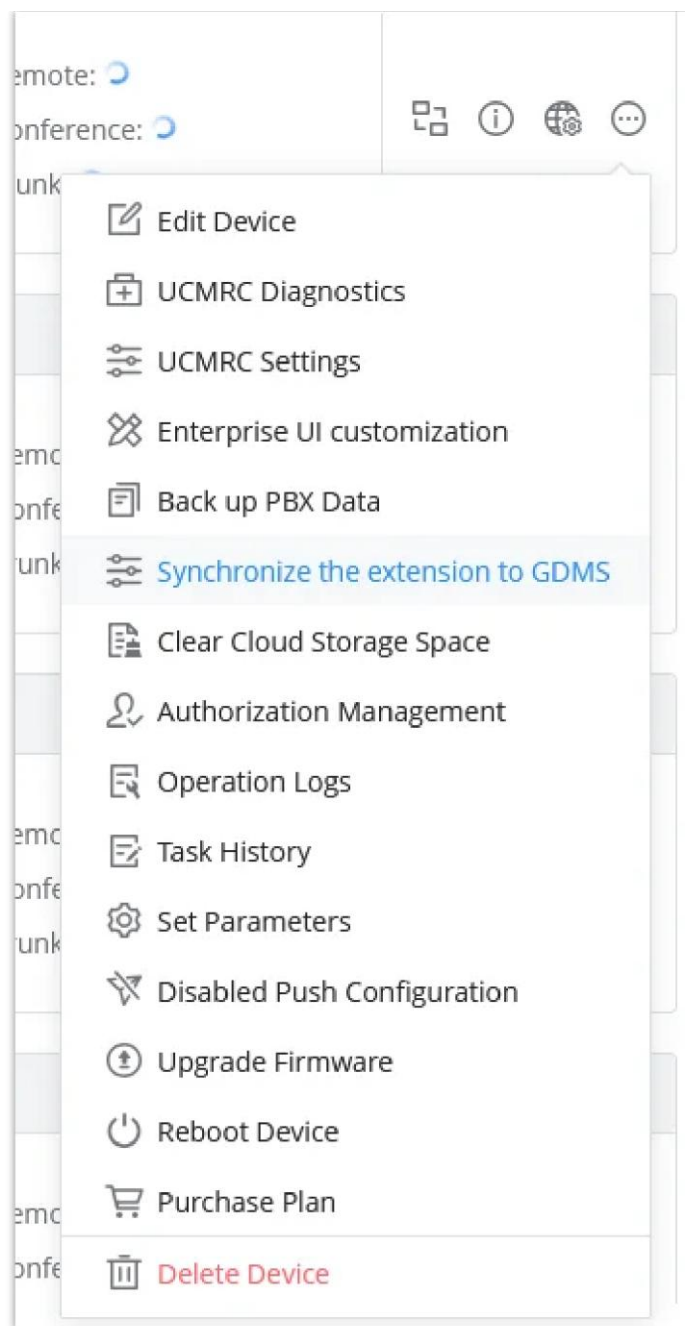

Synchronize the exnetions to GDMS

Steps to Synchronize SIP Extensions:

1. After selecting the appropriate option, navigate to the **WebUI interface** of the PBX device.
2. Once logged in, go to the **UCMRC settings page**.
3. Locate the setting labeled **"SIP Extension Sync"**.
 - If this option is **enabled**, the system will automatically synchronize the SIP extensions configured on the PBX with the GDMS (Grandstream Device Management System) server.
 - This synchronization ensures that any changes or additions to SIP extensions in the PBX are reflected on the GDMS server without requiring manual updates.

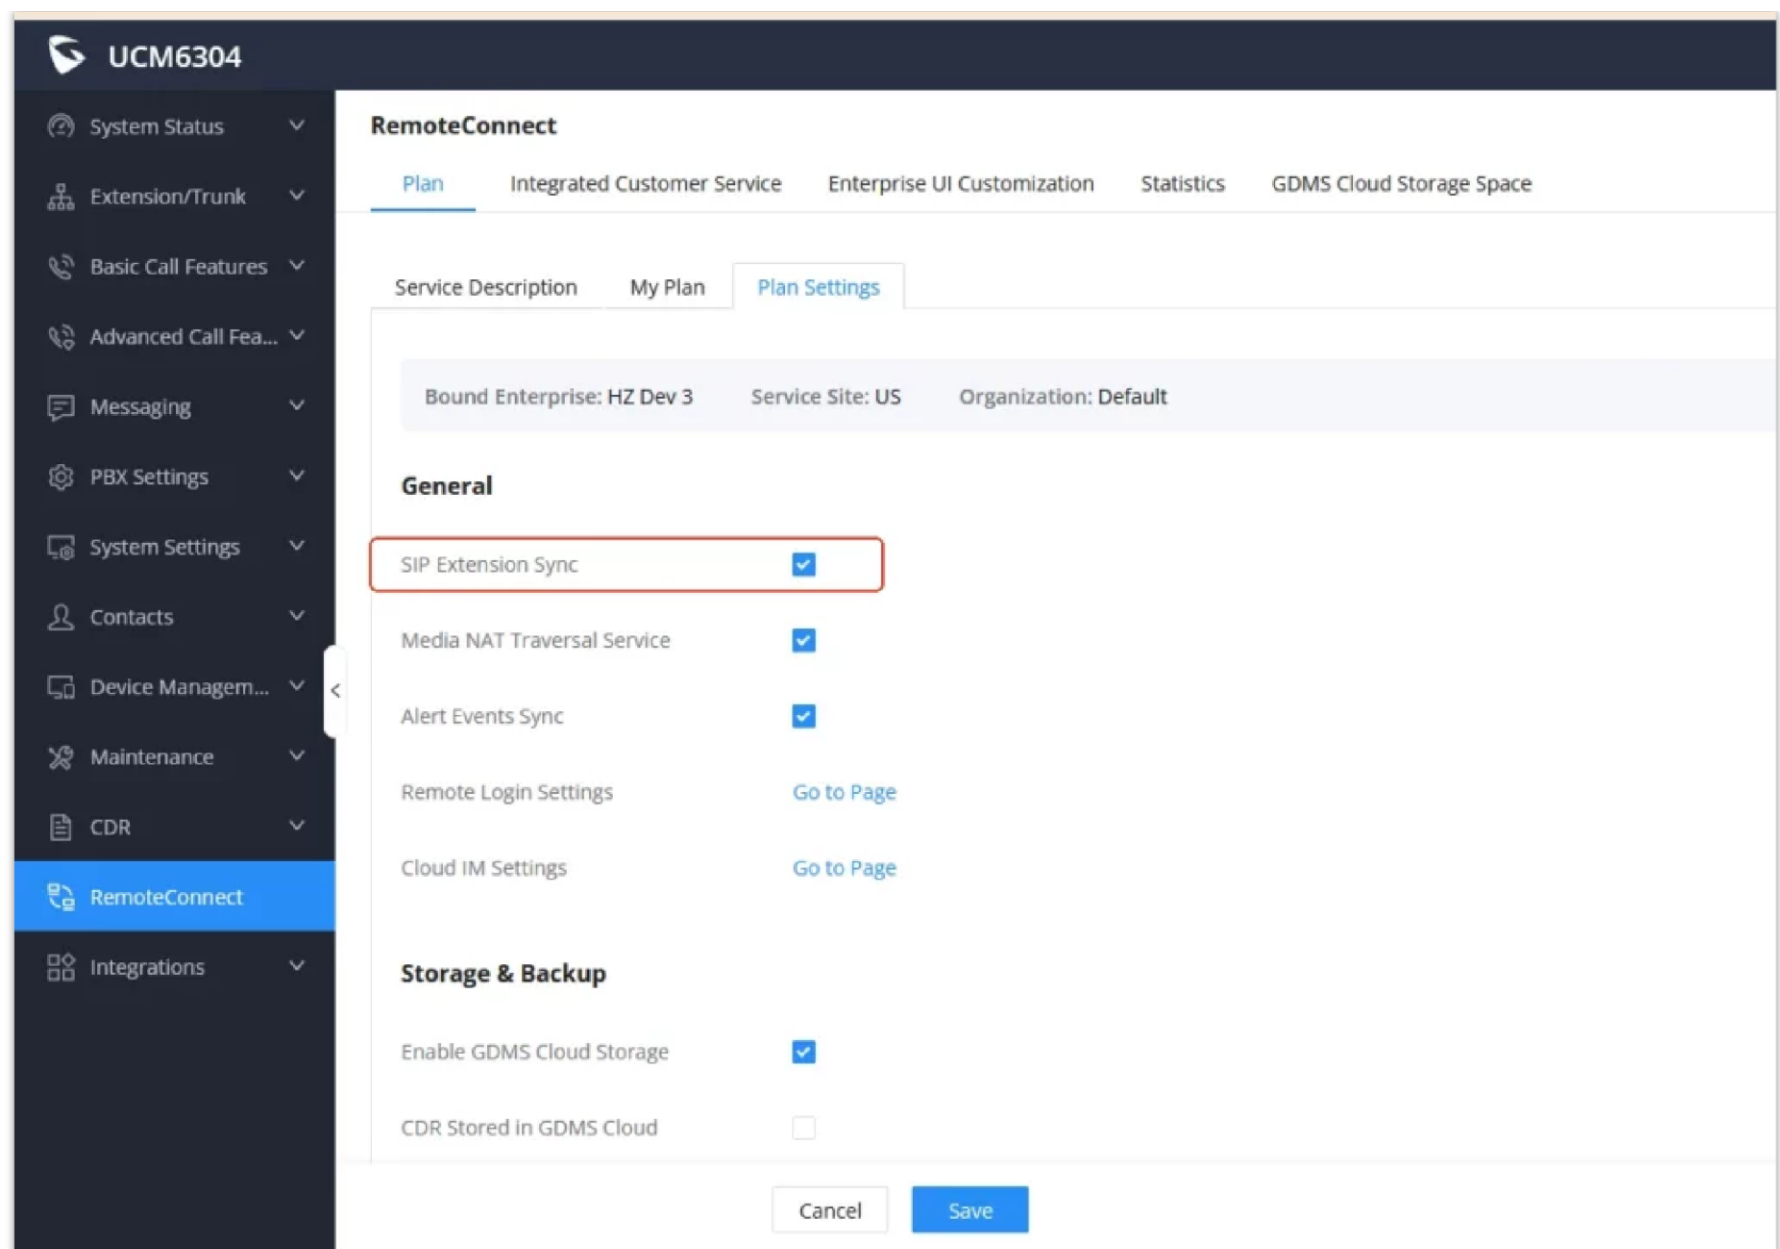


Synchronize extensions to GDMS

Batch Modify Sites

Users could edit the site of a batch of IPPBX devices on the GDMS platform. The default site is **"default"**.

1. Select the desired devices and click on the **"Site Assignment"** button.

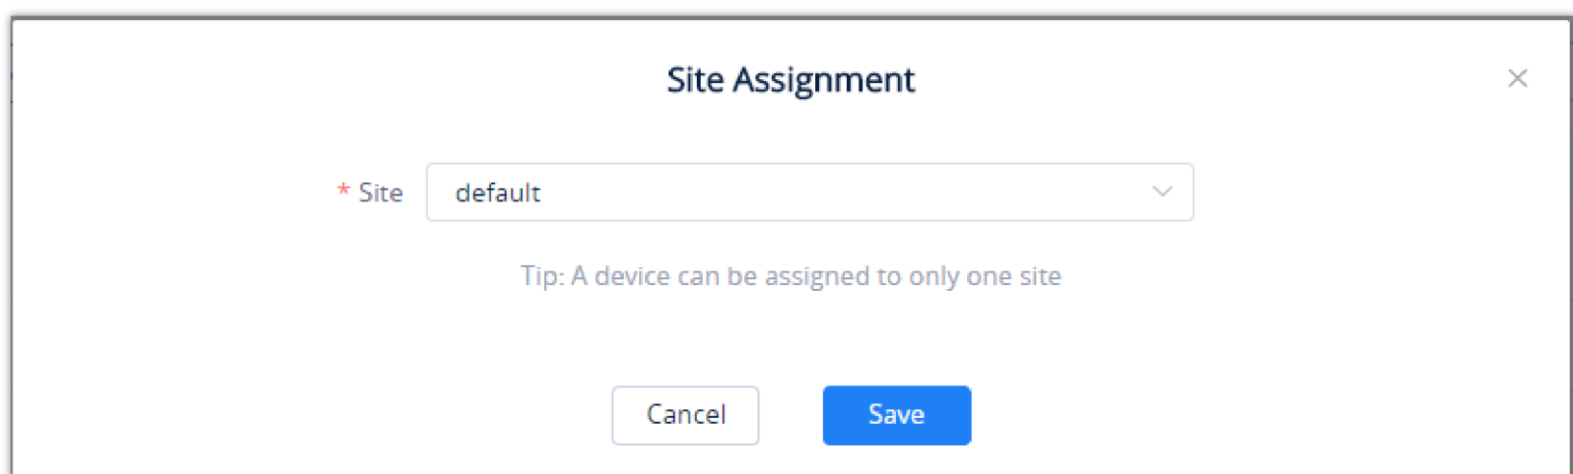

Site Assignment

2. Select the site to assign the selected devices.
3. Click on the **"Save"** button, and all selected devices will be transferred to the selected site.

! Each device can only be allocated to one single site.

View/Disassociate Host/Spare IPPBX Device

Prerequisite: The user has the corresponding UCMRC plan including this function.

Users can view Host/Spare IPPBX devices in the IPPBX devices list, the Host/Spare icon will be marked following the MAC address, and users can view the corresponding MAC address of the Host/Spare devices.

When the Host/Spare association is established, and once the Host IPPBX server is down, the Spare IPPBX device can still get connected through the Host IPPBX device's UCMRC domain name.

The user can click “Remove Relationship” to remove the UCMRC Host/Spare relationship. However, the local Host/Spare relationship configuration in the IPPBX devices is still retained. If the user also wants to remove this relationship, the user needs to go to the IPPBX management platform to disassociate the relationship.


 **Note**

- If the user only purchases one UCMRC plan which contains the HA service for one of the IPPBX devices, the HA features for the IPPBX devices cannot be used normally.
- To ensure that the IPPBX devices can be used normally under the HA mode, the user needs to purchase two UCMRC plans with the same specifications and both plans contain the HA service.

Delete Device


Users could delete one IPPBX device or a batch of IPPBX devices on the GDMS platform.

1. Select the desired devices and click on **More → Delete**.
2. Select an IPPBX device from **GDMS → Device → IPPBX Device** and click on “**Delete Device**”. Users can also select multiple IPPBX devices and then click on **More → Delete** to perform a batch delete for all selected IPPBXs.
3. Click on the “**OK**” button on the pop-up window to confirm deleting the devices, and the selected devices will be deleted immediately from the GDMS platform. The timing tasks involving the deleted devices will be canceled either.

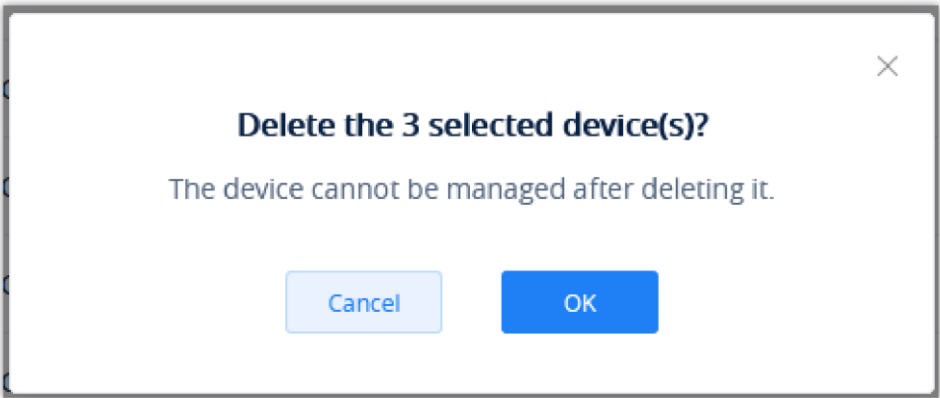

Delete Device Prompt

Export Device

To export the entire device list, click on the  button in the top-right corner of the device list page. The exported list includes all device information.

Cloud Storage

For backup files generated from IPPBX manually or automatically, they can be stored in GDMS cloud storage. On the GDMS platform, users can view all backup files.

1. Go to the IPPBX Backup page, all backup files available for connected IPPBX devices will be displayed. The file type includes CDR files, config files, etc.

 It only displays all the backup files of the IPPBX devices under the current organization. Users can switch the organization to view the backup files of the IPPBX devices under other organizations.

2. Click the searching box at the top of the interface to search the backup files by device MAC address, backup file type, and device model.

Cloud Storage

Automatic File Cleanup

Refresh List

Convert Config File

Upload File

Delete

Download

All Models

All File Types

Enter MAC/Device Name/File Name

☐	MAC Address	Device Name	File Type	File Name	File Size	File URL Address	Storage Time	Options
☐	C0:74:AD:45:3E:40	—	Backup File	backup_202411...	15.71MB		2024/11/12 04:4...	

Total 1

10/page

<

1

>

View Backup File

i

If the storage space of the IPPBX device is insufficient, the backup file cannot be stored. Please clear the storage space or renew the plan to get more storage space.

Users can subscribe to the email notifications so that the alert message will be sent to the configured email box by default when the device storage space is insufficient.

Upload Backup File

Users can upload the backup file and recover the backup file on IPPBX.

1. Go to the IPPBX Backup page, and click on the “Upload File” button in the right upper corner to access the interface:

Upload File

Click or drag and drop file here to upload

Supported file type: tar, cenc, venc

* MAC Address

Select

* File Name

File Type

Config Files

Cancel

OK

Upload File

File	Click to select the backup file from the local PC or drag the backup file to this field to upload the backup file. The backup file can be the configuration file of the device.
MAC Address	Enter the MAC address of the IPPBX device for uploading this backup file. Note: The IPPBX device must be in the current organization, otherwise, the backup file cannot be uploaded.
File Name	Enter the name of the backup file.

File Type	Enter the file type of the backup file so that the IPPBX device can obtain the backup file accordingly by the file type.
-----------	--

2. Click the **OK** button to upload the backup file.

If the IPPBX device does not have enough storage space, the backup file cannot be uploaded. The user can clean up the cloud storage space file for this IPPBX or purchase an additional plan.

Download Backup File

1. On the “**IPPBX Backup**” page, click the button



following the backup file to download the file.

2. Download the files locally.

- Users can view the backup files and restore the IPPBX device quickly without downloading.
- Users can download the backup file manually and restore the IPPBX device.
- Users can download the files in batches by selecting them on the UI and then clicking “Download”


Restore an IPPBX Backup File Remotely

Users can restore backup files for IPPBX devices remotely through the GDMS platform.

1. Navigate to **UCMRC** → **Cloud Storage**, select an IPPBX backup file, and click the “Restore” button



to restore the IPPBX device.

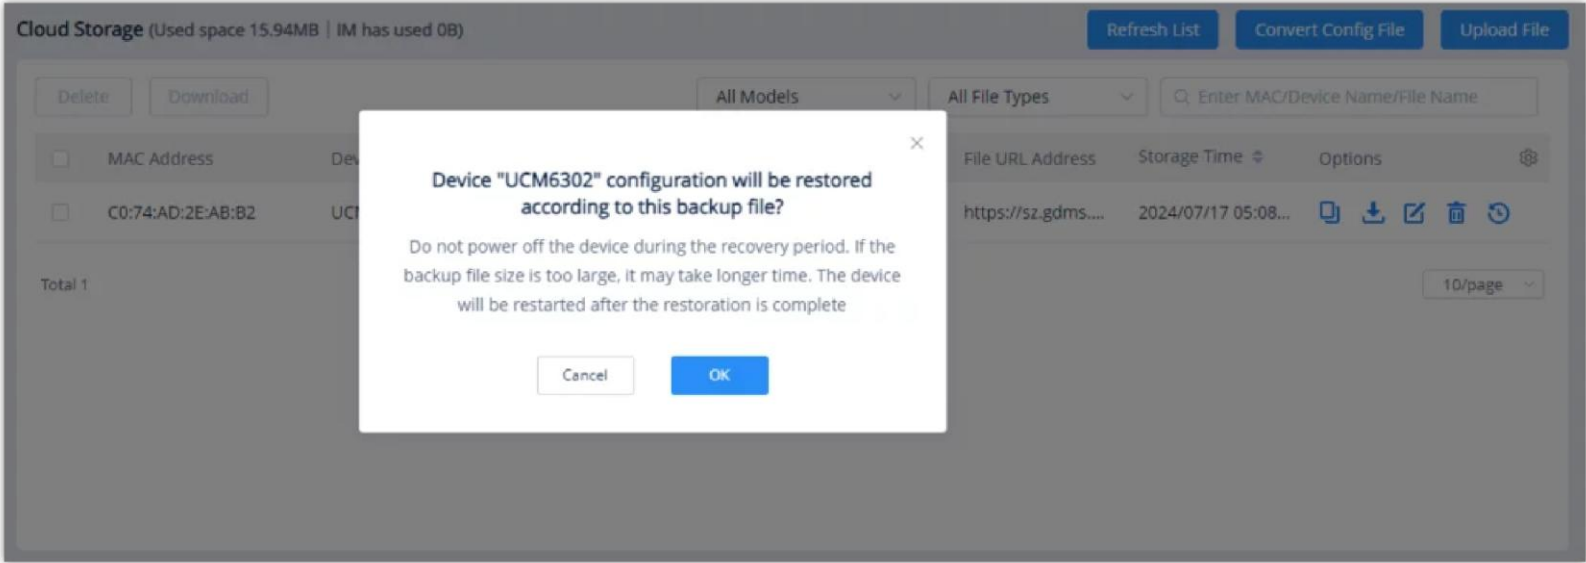

Restore a Backup File Remotely

2. Once the user clicks the “OK” button, the IPPBX backup file will be assigned to the IPPBX device to restore the IPPBX device.

3. It may take several minutes to restore the backup file for the IPPBX device. The user can refresh the interface to view the results next to the MAC address of the IPPBX device on the interface. As the screenshot shows below:

: Restored successfully. The user can leave the cursor on the icon to view the last restoring time.

: Restored failed. The user can leave the cursor on the icon to view the last restoring operation time.

☐	MAC Address	Device Name	File Type	File Name	File Size	File URL Address	Storage Time	Options	
☐	C0:74:AD:2E:AB:B2	UCM6302	Backup File	backup_2024071...	15.94MB		2024/07/17 05:08PM	    	
Total 1									

[View Results](#)

Delete Backup File

If the user wants to clean up the storage space of the IPPBX device, the user can delete the backup files in the IPPBX device.

1. On the “ **IPPBX Backup** ” page, click the button



following the resource file to delete the backup file. Users can also select multiple backup files and click the Delete button on the top of the page to batch delete the backup files.

2. When the user confirms to delete, the selected files will be deleted from the GDMS platform.

Note


To delete multiple files at once, please select them by then clicking on “Delete”.

 Please note that when the backup file is deleted, it cannot be restored.

Convert Configuration File

If the user has upgraded the IPPBX device model, the user can use this function to convert the configuration file of UCM62xx/UCM65xx to the configuration file of UCM63XX.


1. Go to the **UCMRC** → **Cloud Storage** interface, the user can click the “**Convert Config File**” button to access the conversion interface, as the screenshot shows below:

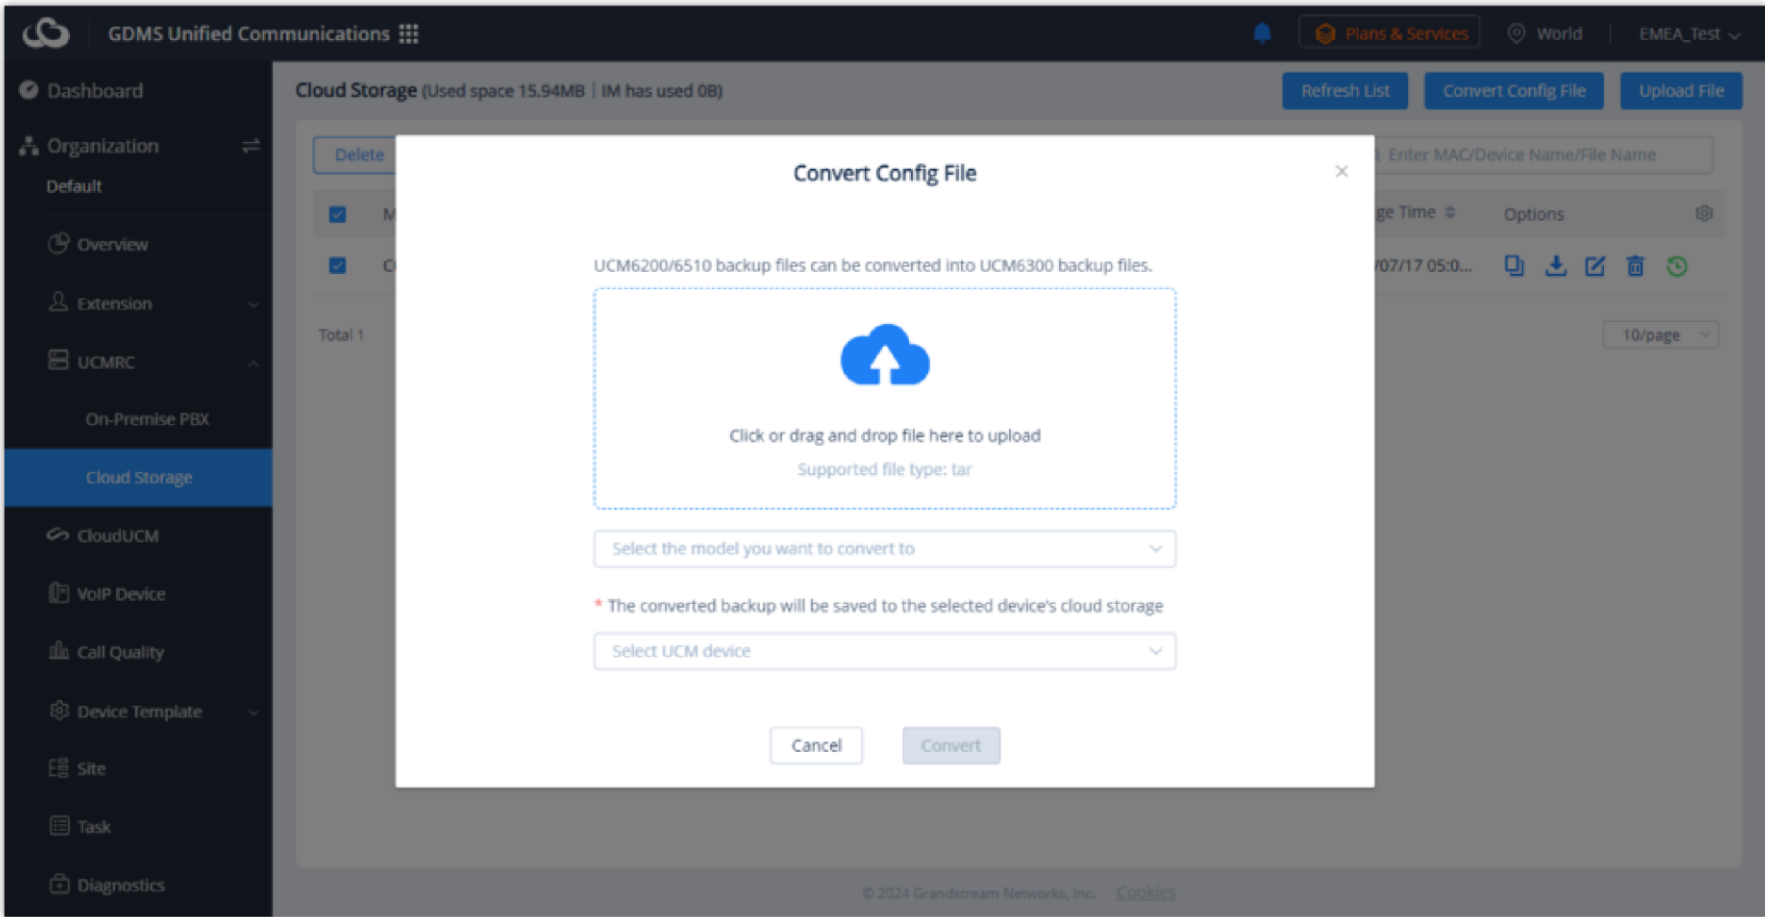

Convert Config File

2. The user can click to upload or drag the configuration file of UCM62xx/UCM65xx to the uploading area.
3. Select the target model to be converted, which means the model of your new IPPBX device.
4. Select the converted configuration file and save it to the cloud storage space of the new IPPBX device.
5. The converting duration will last for several minutes. When the conversion is done, the user can download the converted configuration file on the IPPBX Backup interface. Or the user can click to download the converted configuration file

directly to the local PC. The user can also restore the configuration file in the new IPPBX device directly.

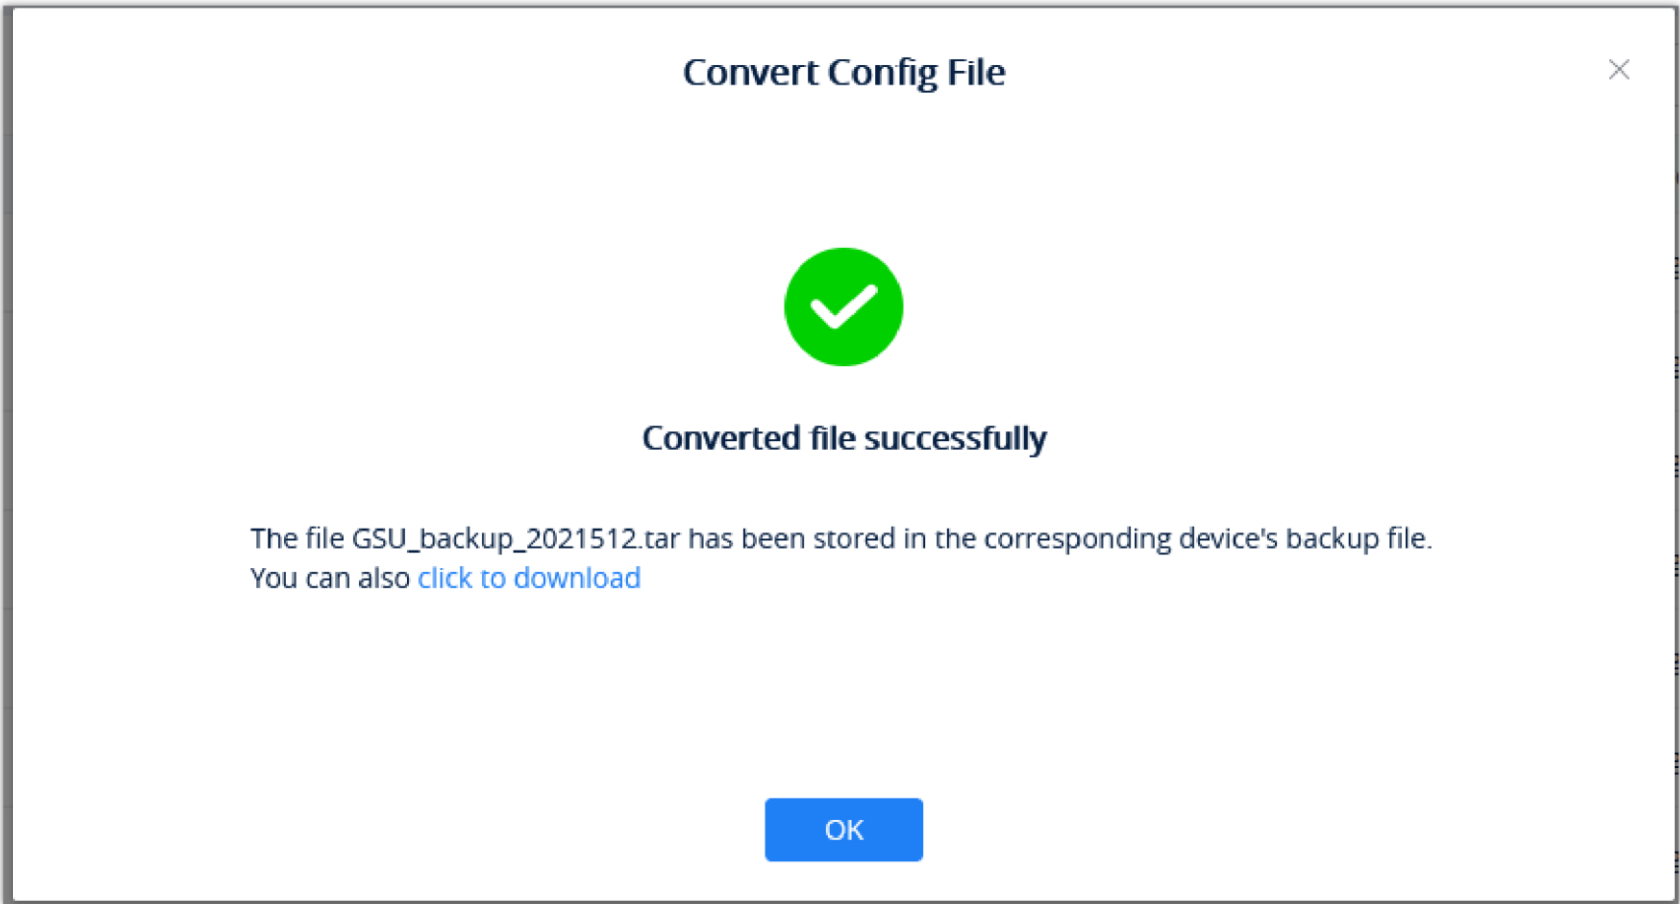


Converted File Successfully

 The original configuration file format needs to be a .tar file, and the file size limit is 10GB.

Automatic File Cleanup

Automatic File Cleanup feature allows the user to manage the cloud storage efficiently by removing the older files following a storage percent threshold or a number of days before the files are cleaned. These settings apply on all the PBX devices in the organization.

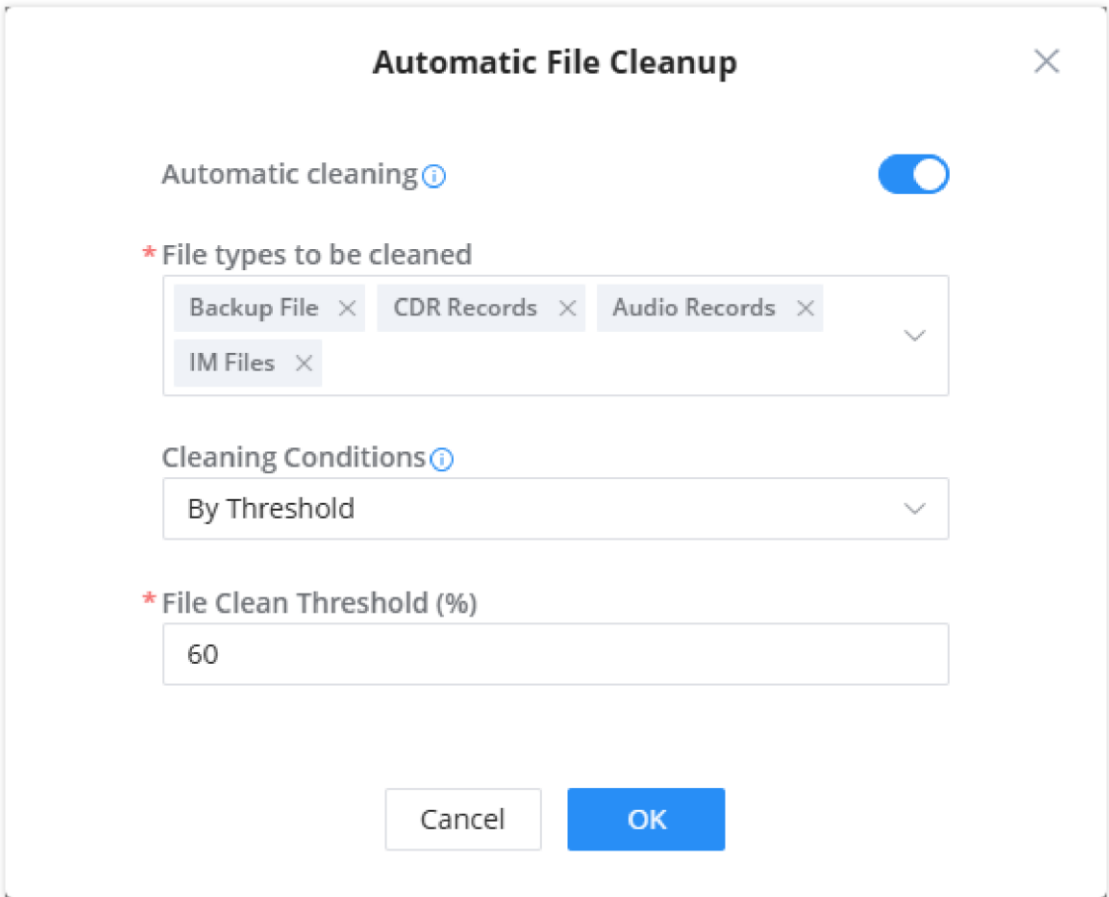

Automatic File Cleanup Configuration


Automatic Cleaning	Toggle on/off the automatic cleaning
--------------------	--------------------------------------

File Types to Be Cleaned	Select the files which will be cleaned. Multiple selections are allowed. ● Backup File: Backup files stored in cloud storage space. ● CDR Records: CDR records stored in cloud storage space ● Audio Records: Recording files stored in cloud storage space. ● IM Files: Wave chat files stored in cloud storage space.
Cleaning Conditions	Choose the condition which will trigger the cleaning. ● By Threshold: Sets a storage threshold which the back up files can take. Once that threshold is reached, the older files will be deleted. ● Keep Last X Days: Delete all files older than X days.

CloudUCM

In the CloudUCM Device List, all CloudUCM devices in the current organization are displayed, along with device status, plan information, storage space, CloudUCM server address, the number of calls in real-time, extension number (the number of currently registered extensions/the number of created extensions/the maximum number of extensions in the plan), and Trunk status.

CloudUCM System integration in the GDMS allows the creation of CloudUCM devices and other features for managing the device like starting and stopping the CloudUCM, rebooting, upgrading the firmware, running diagnostic for the device, checking the task history and operation log, and resetting the device’s default password.

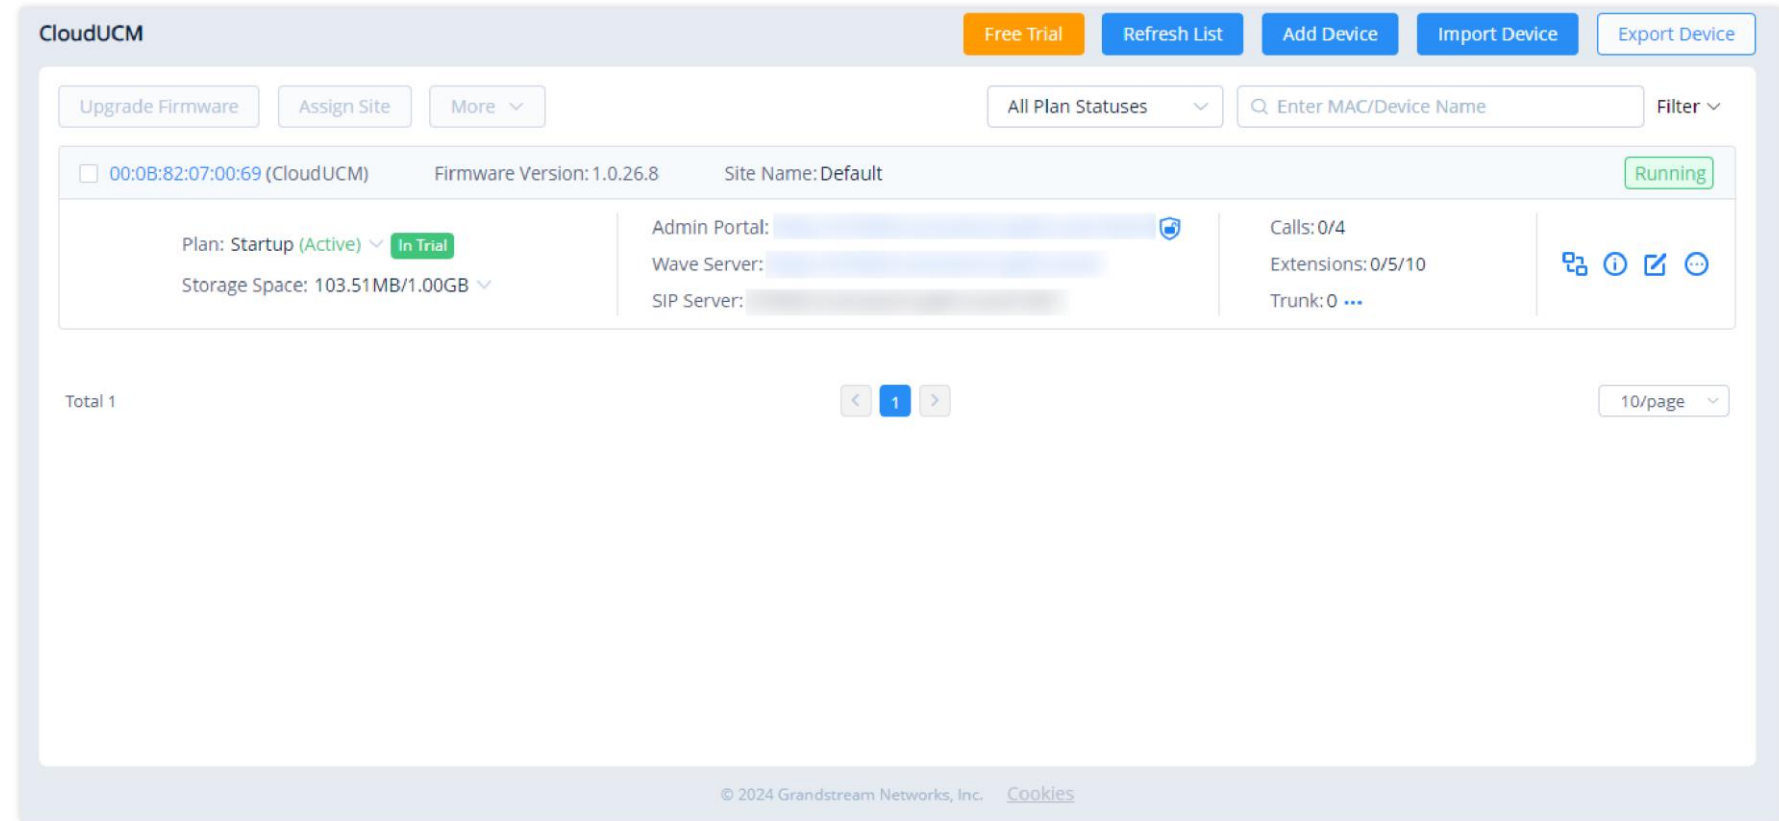

Status Descriptions:

Status	Description
Device Status	Running This indicates that the CloudUCM device is running properly.
	Stopped This indicates that the CloudUCM device is not running. (It is possible that the plan has expired, or it has been stopped manually by the administrator.)
	Waiting Activation This indicates that the CloudUCM device has not been activated yet and it needs to be activated before it can be used.
	starting This indicates that the CloudUCM device is being started and cannot be accessed in this state.
	Deploying This indicates that the current CloudUCM device is in the process of deploying services, such as upgrading firmware, upgrading plan services, or restoring configuration, etc. In this state, the CloudUCM device cannot be accessed.

The firmware version is too low	 This icon indicates device firmware version is too low, and the device cannot be used normally with GDMS.
The Plan is about to expire	 This indicator means the plan is expiring soon or already expired.
Trunk Abnormal	 Trunk: 4 This indicates that the abnormal trunk exists in the CloudUCM. You can click to view the status of all trunks.
Unread Notification	 This indicates that the CloudUCM device has some unread notifications. You can click to access the Web UI of the CloudUCM device.
Fail2ban	 This indicates that the CloudUCM device has 2 IP addresses that are blocked by Fail2ban. You can click to access the Fail2ban page on the Web UI of the CloudUCM device.

Server Address Descriptions:

Admin Portal: This specifies the CloudUCM device’s Web UI access address. The username and password of the device are required. CloudUCM User Manual

Wave Server: This specifies the server address of the Wave client. Wave User Manual

SIP Server: This specifies the SIP server address used for registering extensions. IP Phone Configuration User Manual

Filter Device:

All Plan Statuses

Q Enter MAC/Device Name/IP

Filter

All Cities

All Device Status

Site

All Firmware Version

Search Filter


Apply for CloudUCM Free Trial

Users can apply for the CloudUCM free trial. If you need more free trials, you can contact your superior channel or Grandstream Support for help. Learn more about [CloudUCM Free Trial](#).

 **CloudUCM Free Trial Limitations:**

- For GDMS “Personal” and “Enterprise” users, one CloudUCM trial is allowed per organization under the GDMS account at any given time. Once a trial is converted to a paid plan, the GDMS user can apply for a new trial.
- For GDMS “Service Provider,” “Reseller,” and “System Integrator” users, up to five CloudUCM trials are allowed per organization under the GDMS account at any given time. Once a trial ends or is converted to a paid plan, the GDMS user can apply for a new trial.

1. Apply in the CloudUCM Device List:

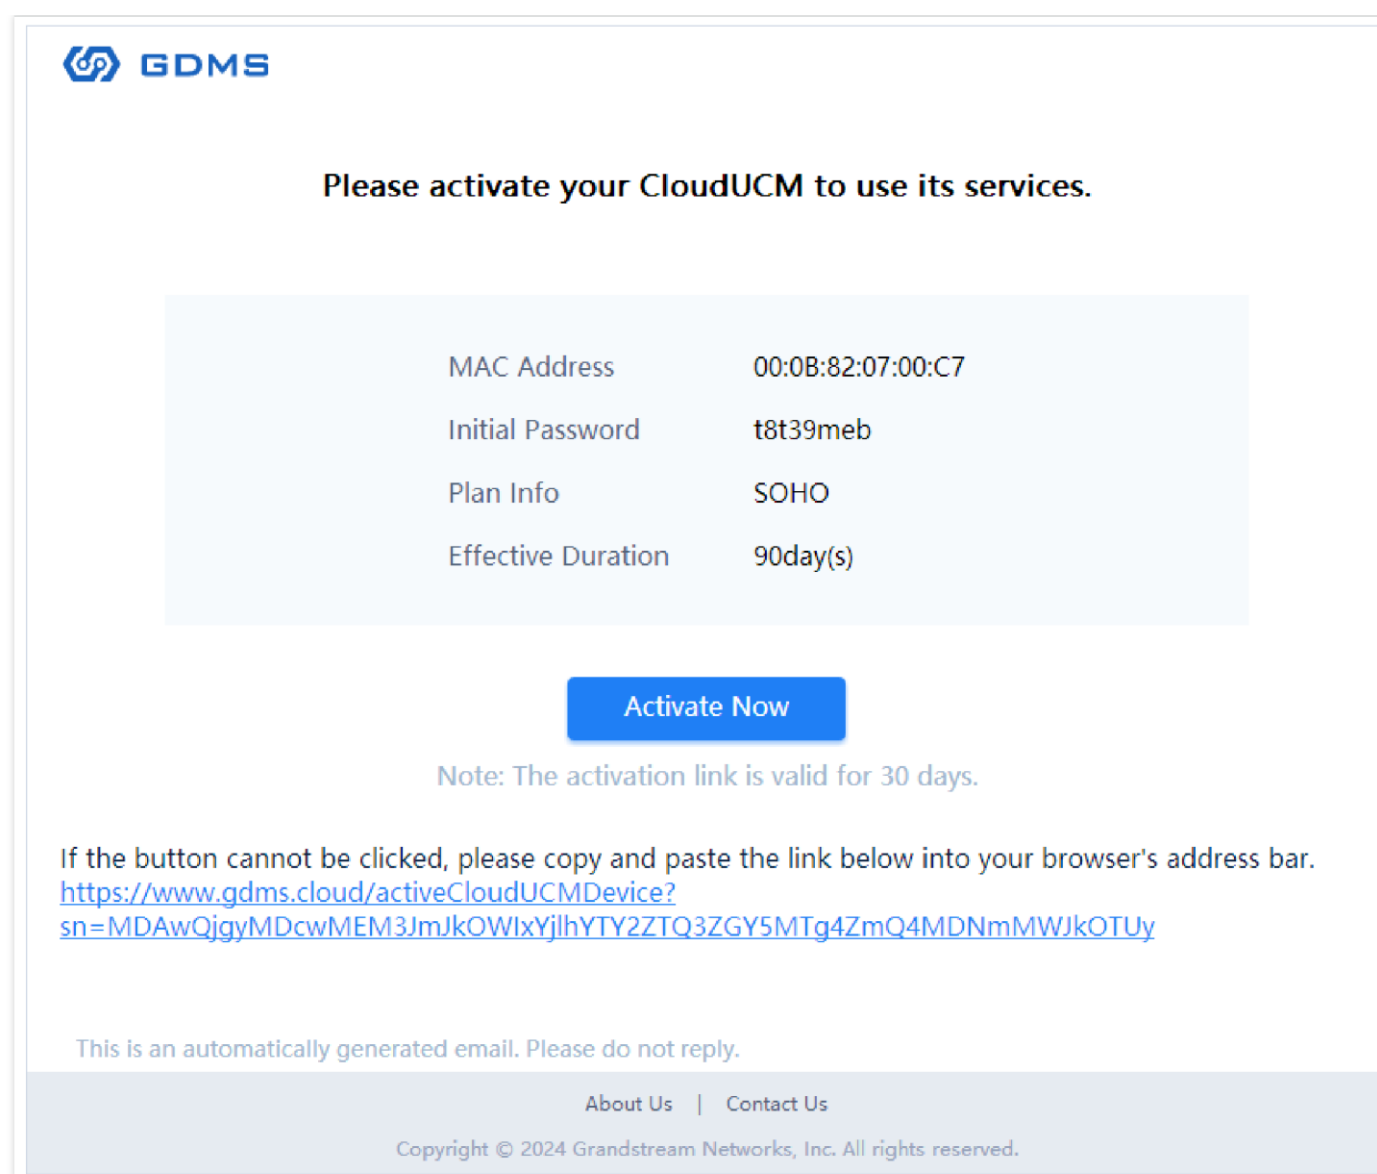

Activate CloudUCM

If you are applying for a second free trial, you will be asked to fill in the following information and submit it to us.

The image shows a "Free Trial" application form. It has a title bar with "Free Trial" and a close button. The form contains several fields: "Profession" (a dropdown menu with "Building" selected), "Superior Channel" (a text input field with "ABC"), "Selling GrandStream Products" (radio buttons for "On sale" and "Not sold", with "On sale" selected), "GrandStream Products Monthly Sales" (a dropdown menu with "Select"), "Expected number of trial plan" (a text input field), and "Use" (a text input field). At the bottom are "Cancel" and "Submit" buttons.

Second Free Trial Period Application


Activate CloudUCM Device

For a newly created CloudUCM device, you need to activate the device before you can start using it.

1. You can activate the CloudUCM device by clicking the icon



in the activation email or in the CloudUCM Device module of the GDMS platform.

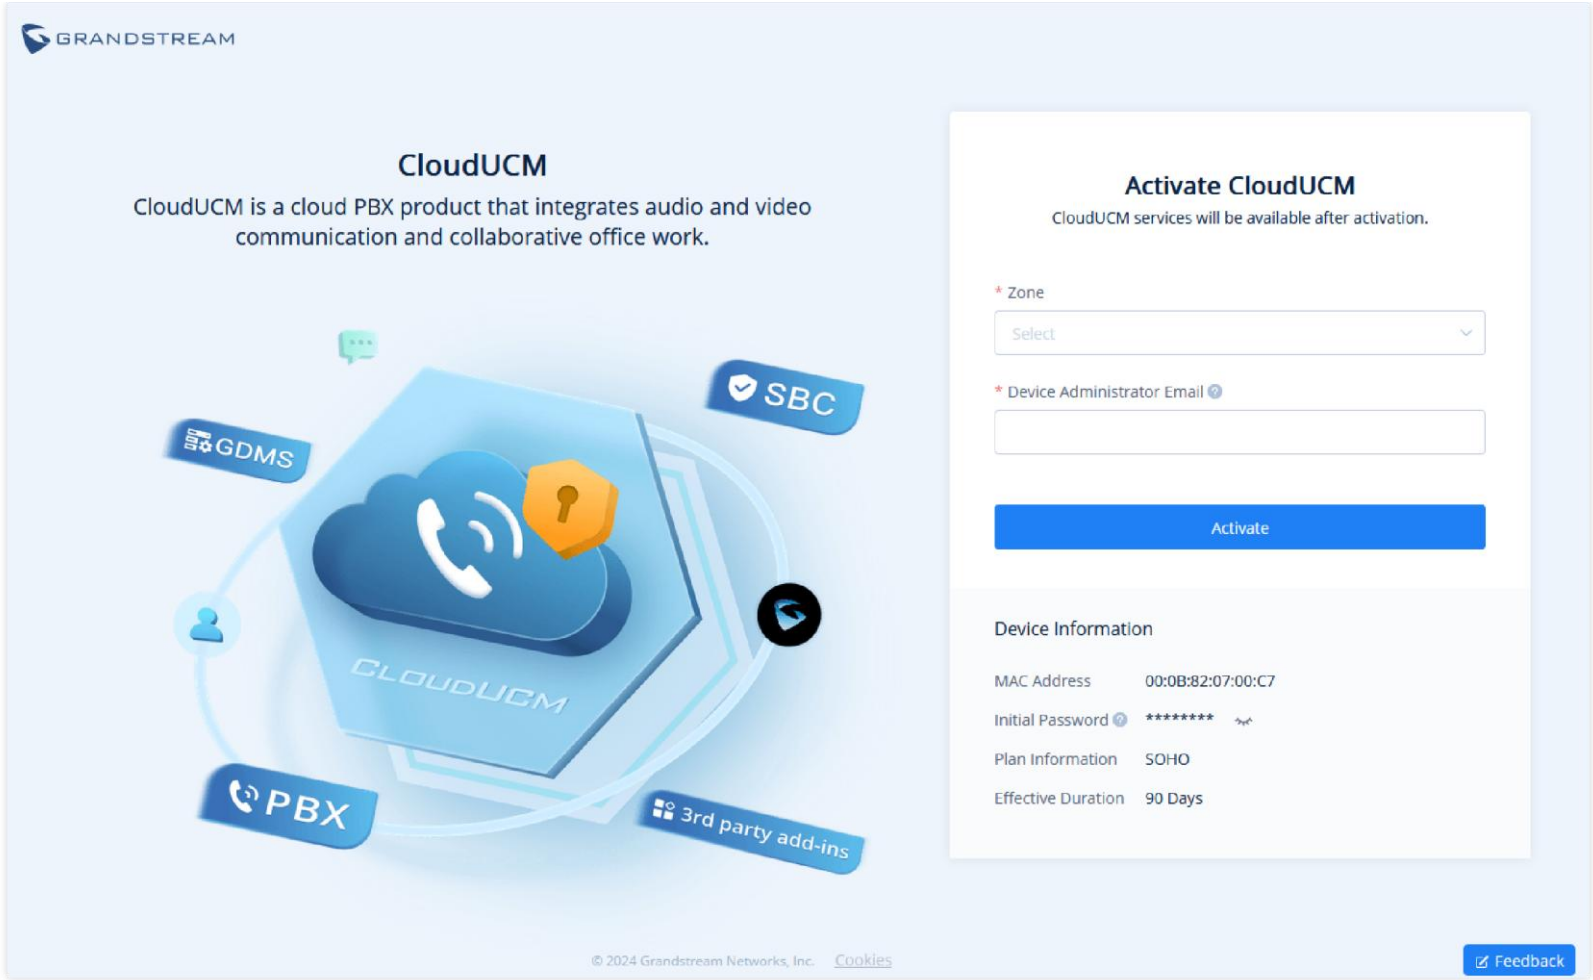

Activate CloudUCM

2. Before activating the CloudUCM device, you need to fill in the following information:


Zone	Select the nearest data center for quick access.
CloudUCM Server Address	Enter your custom service address for easy memorization. Note: Only the paid plans support this function.
Device Administrator Email	Enter the administrator email of your CloudUCM device so that you can use it to retrieve the password, receive plan notifications, storage space alerts, etc.

The device information will be displayed after filling the information:

MAC Address	It indicates the virtual MAC address of the CloudUCM device, as a unique identifier for this device.
Initial Password	It indicates the initial password of the CloudUCM device, and it is also the initial password of the super administrator for logging in to the CloudUCM Web UI.
Plan Information	It indicates the plan name for this CloudUCM device.
Valid Duration	It indicates the validity period of this CloudUCM device’s plan.

3. The activation may take several minutes. After activating the CloudUCM device, you can quickly access the CloudUCM admin portal to configure the CloudUCM service or add it to the GDMS platform for management.

Please refer to the CloudUCM User Manual to learn more details.

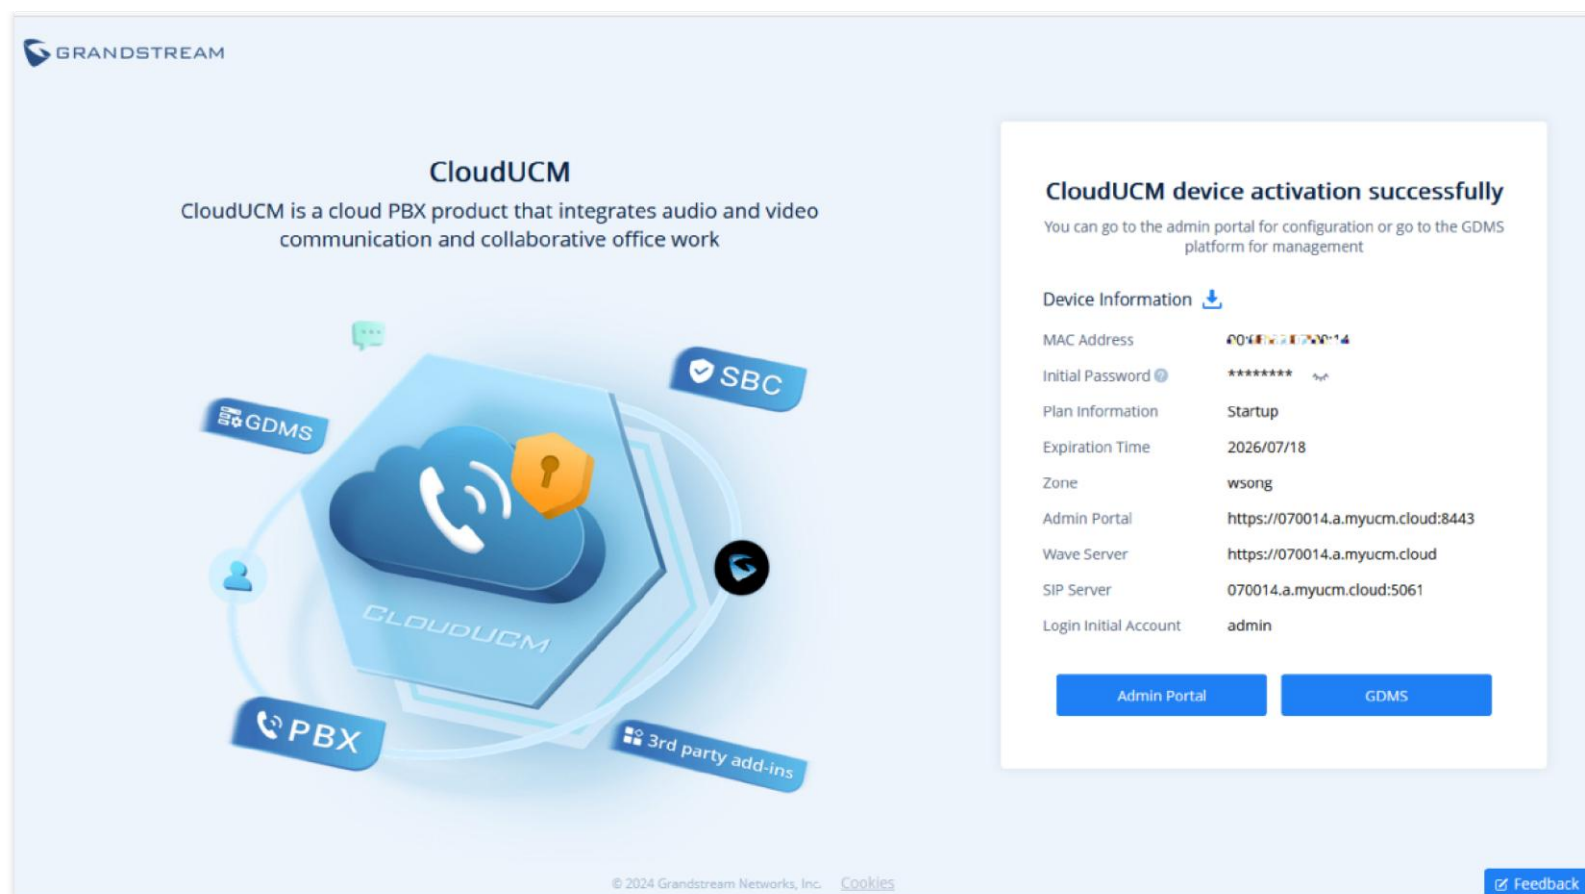

CloudUCM Activated Successfully

Add CloudUCM Device

.You will need to enter the MAC address initially followed by the initial password of your CloudUCM device to add it. The rules are the same as adding IPPBX devices to the UCMRC System.

Add Device (To Default)

* MAC Address

:

:

:

:

:

Cancel

Next

Add Device Define MAC Address

Add Device (To Default)

Device Name

Enter Device Name (up to 64 characters)

* Initial Password

* Site

Enter new site name

Select from existing sites

Prev

Save

Define Initial Password

Import CloudUCM Devices in Batches

The rules are the same as importing IPPBX devices in batches to the UCMRC System.


Start/Stop CloudUCM Device

- Start Device: When the CloudUCM device stops running or needs to be activated, you can manually start the device. If the current plan has expired, it cannot be started.
- Stop Device: When the CloudUCM device is running, you can click the option  to stop the device. After stopping the device, the device is no longer accessible.

Remotely Access CloudUCM Device Web UI


Click the option  to remotely access the Web UI of the CloudUCM device on the device list.

- You can access the CloudUCM device Web UI without entering a password. Once the permission is assigned, the user can remotely access the IPPBX Web UI through the GDMS platform without entering the IPPBX password.

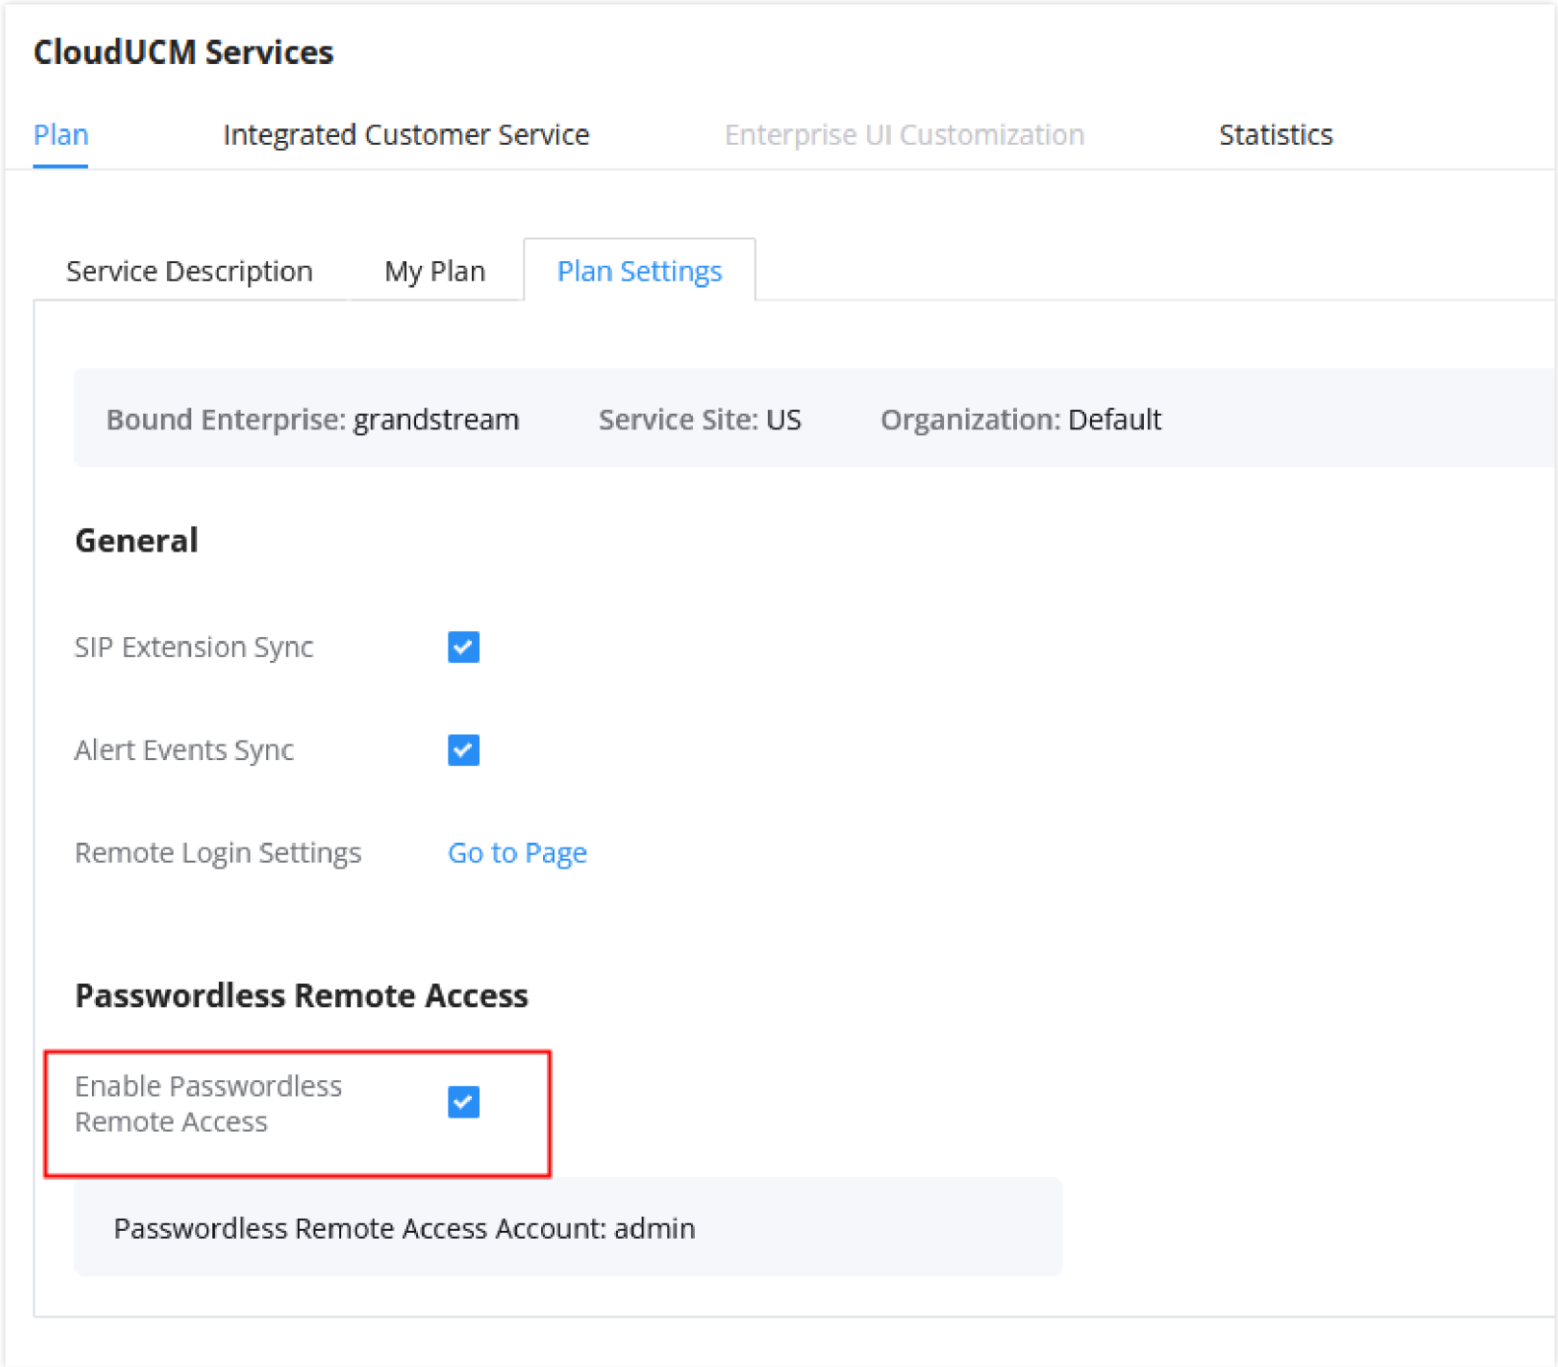

Enable Passwordless Remote Access

You can also set the CloudUCM device Web UI to be accessible only through the GDMS platform:

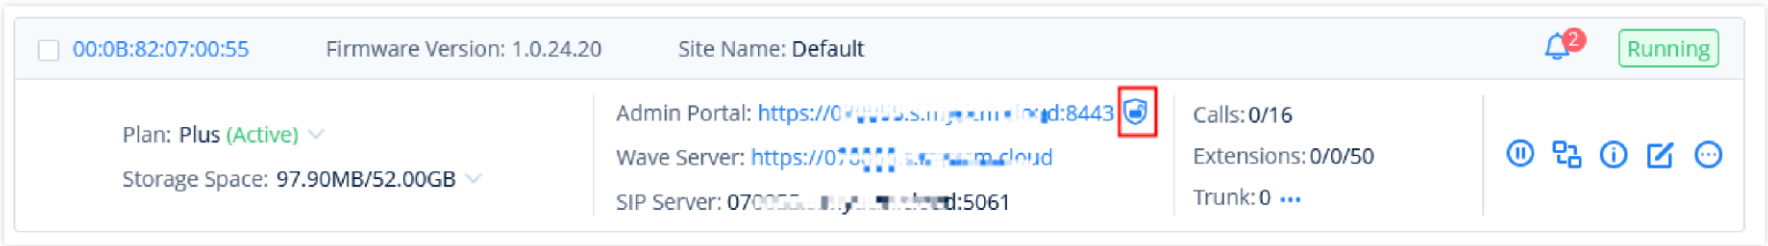

Restrict Accessibility Through GDMS Only


View Device Details

In the CloudUCM Device List, you can click the option  to view the device details, including the current extension registration status, VoIP device status registered with the extension, storage space usage status, the number of terminals connected to the server address, alert statistics, call statistics, and extension registration statistics.


You can view the CloudUCM device daily statistical reports, basic device information, plan information, etc.

Server Address Descriptions:

- **Admin Portal:** This specifies the CloudUCM device's Web UI access address. The username and password of the device are required. [CloudUCM User Manual](#)
- **Wave Server:** This specifies the server address of the Wave client. [Wave User Manual](#)
- **SIP Server:** This specifies the SIP server address used for registering extensions, [CloudUCM Endpoint Configuration Guide](#)

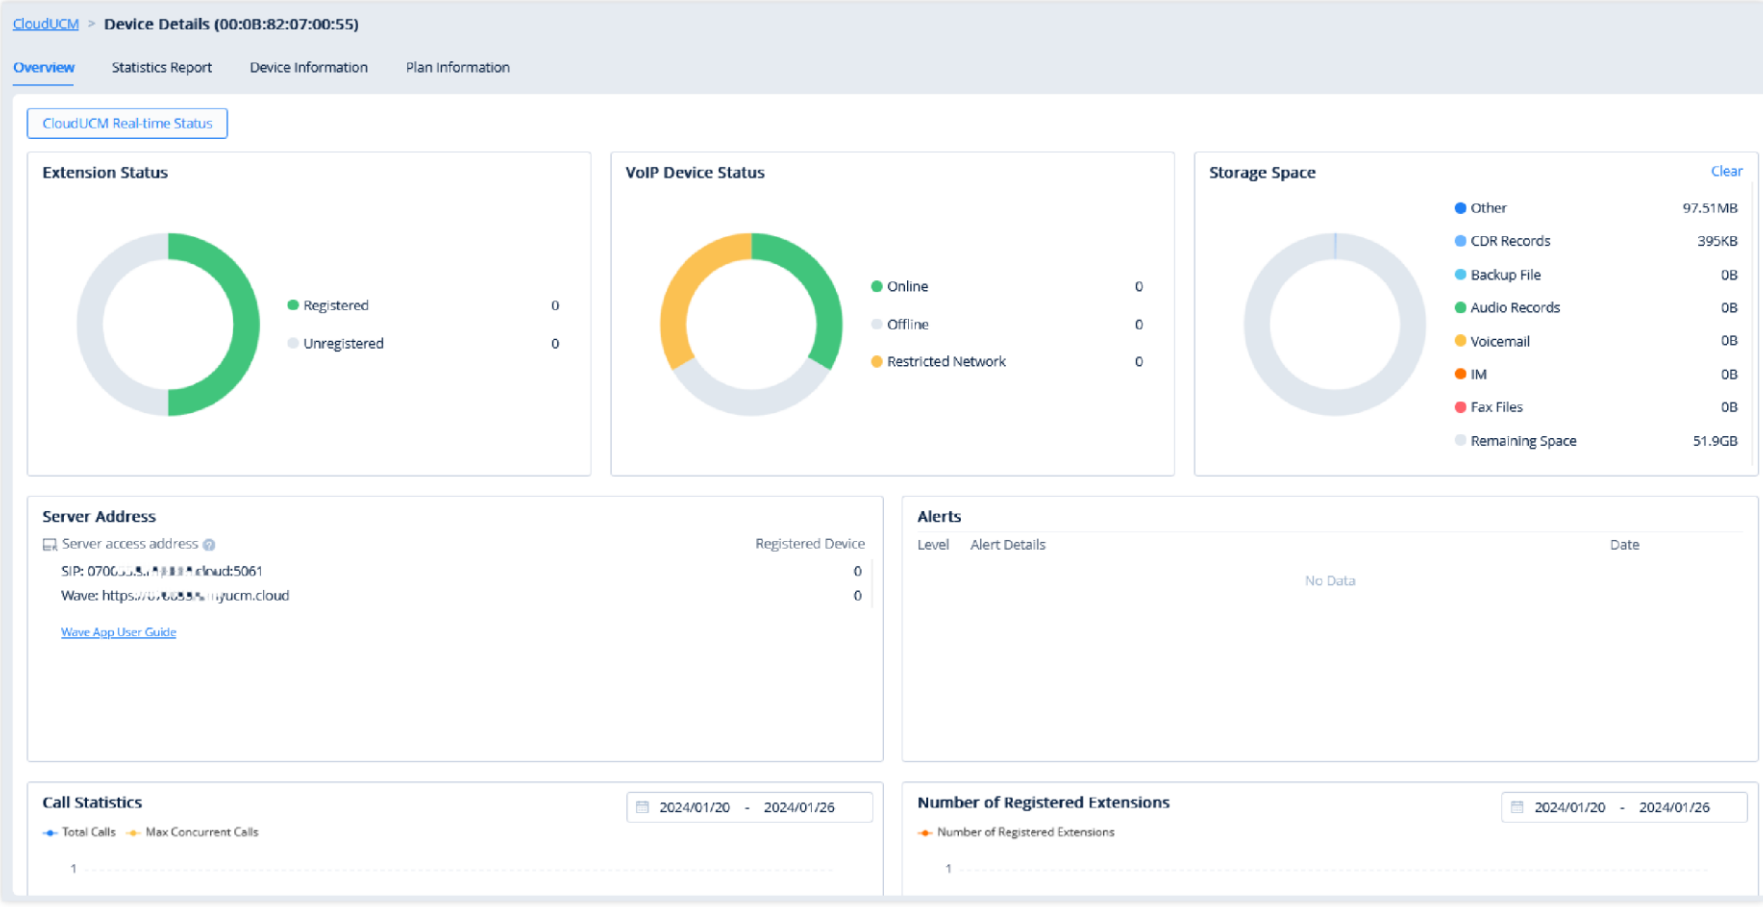

CloudUCM Device Overview

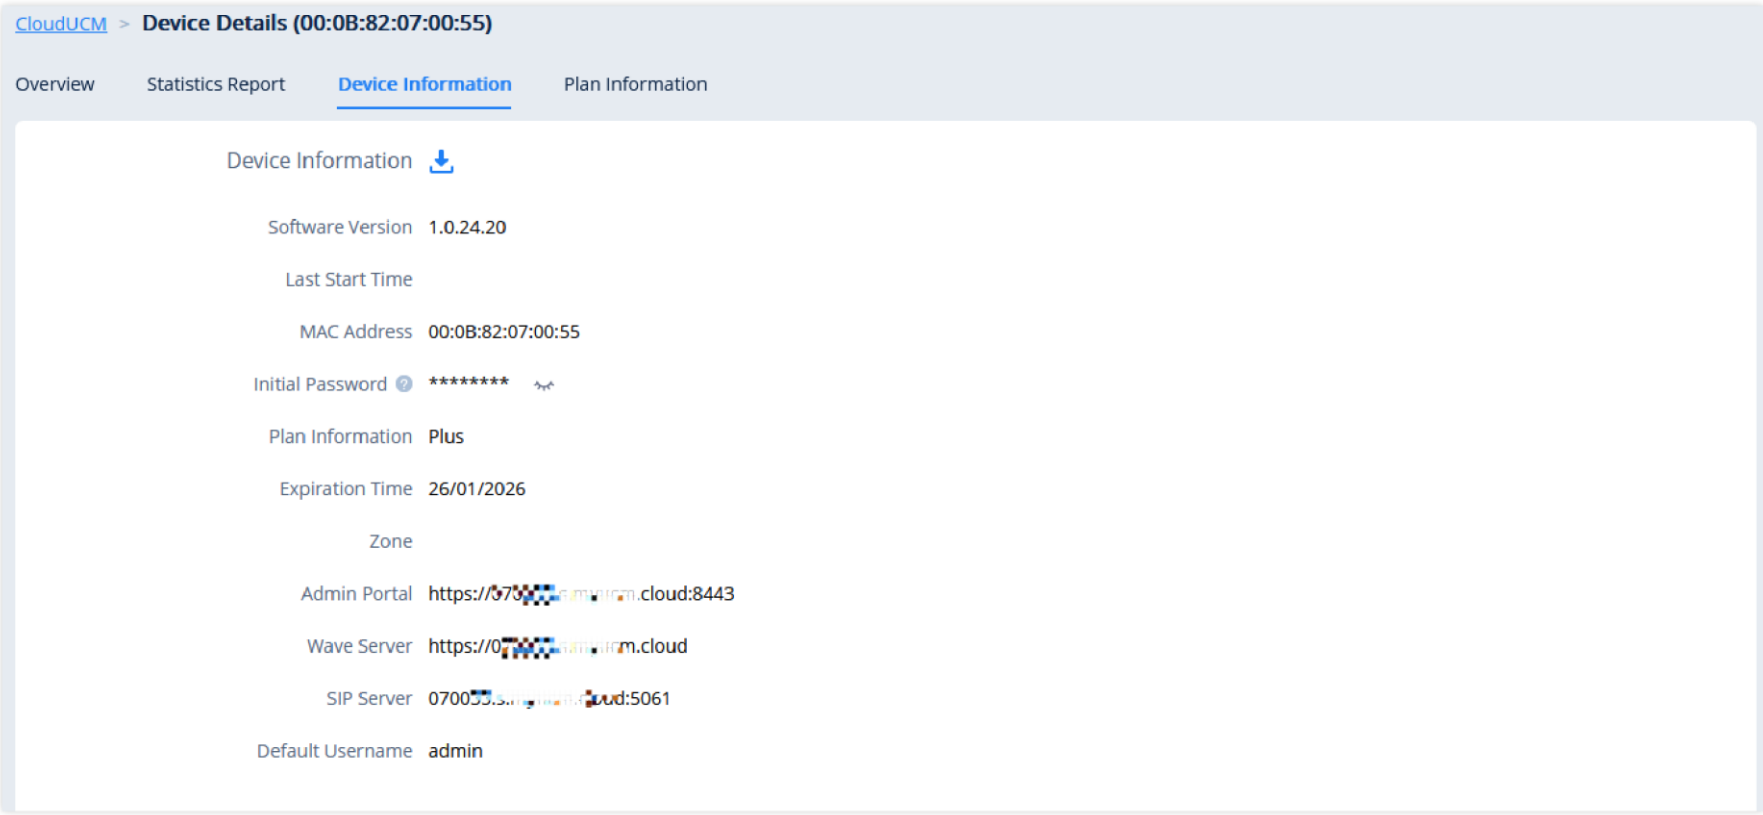

CloudUCM Device Information

Edit CloudUCM Device

You can click the option  in the CloudUCM Device List to edit the device:

Edit Device

MAC Address

00:0B:82:07:00:16

Device Name

ABC

* Site

ABC

Customer Email

Customer Remarks

Device Remarks

Zone

World

* Server Address

070016

.a.myucm.cloud

Cancel

Save

Edit Device

- Customer Email:** Enter the email address of the customer who uses this device.
- Customer Remarks:** Enter the remarks of the customer who uses this device.
- Device Remarks:** Enter the remarks of the device. The device remarks of the CloudUCM device will be synchronized to the GDMS platform.
- Server Address:** Enter the server address of the CloudUCM device. The Plus plan allows you to customize the domain name for this server address.

Custom Server Domain Name

Prerequisite: The CloudUCM advanced plans support custom server domain names.

- On the CloudUCM device editing page, users can customize the server domain name.
- You can enter the preferred URL, such as {yourdomain}.a.myIPPBX.cloud.

* Server Address

rjyao2


.a.myucm.cloud

CloudUCM Server Address

- If the plan has a custom domain name function, the user can click on the “Custom Server Domain Name” option and enter the server address with the private domain name, and the user also needs to enter the custom certificate of the domain name.

Note


The custom address needs to be resolved to the existing default server address (e.g. a.myucm.cloud), otherwise, the custom address cannot be recognized, and users cannot connect to the IPPBX device through the custom address.

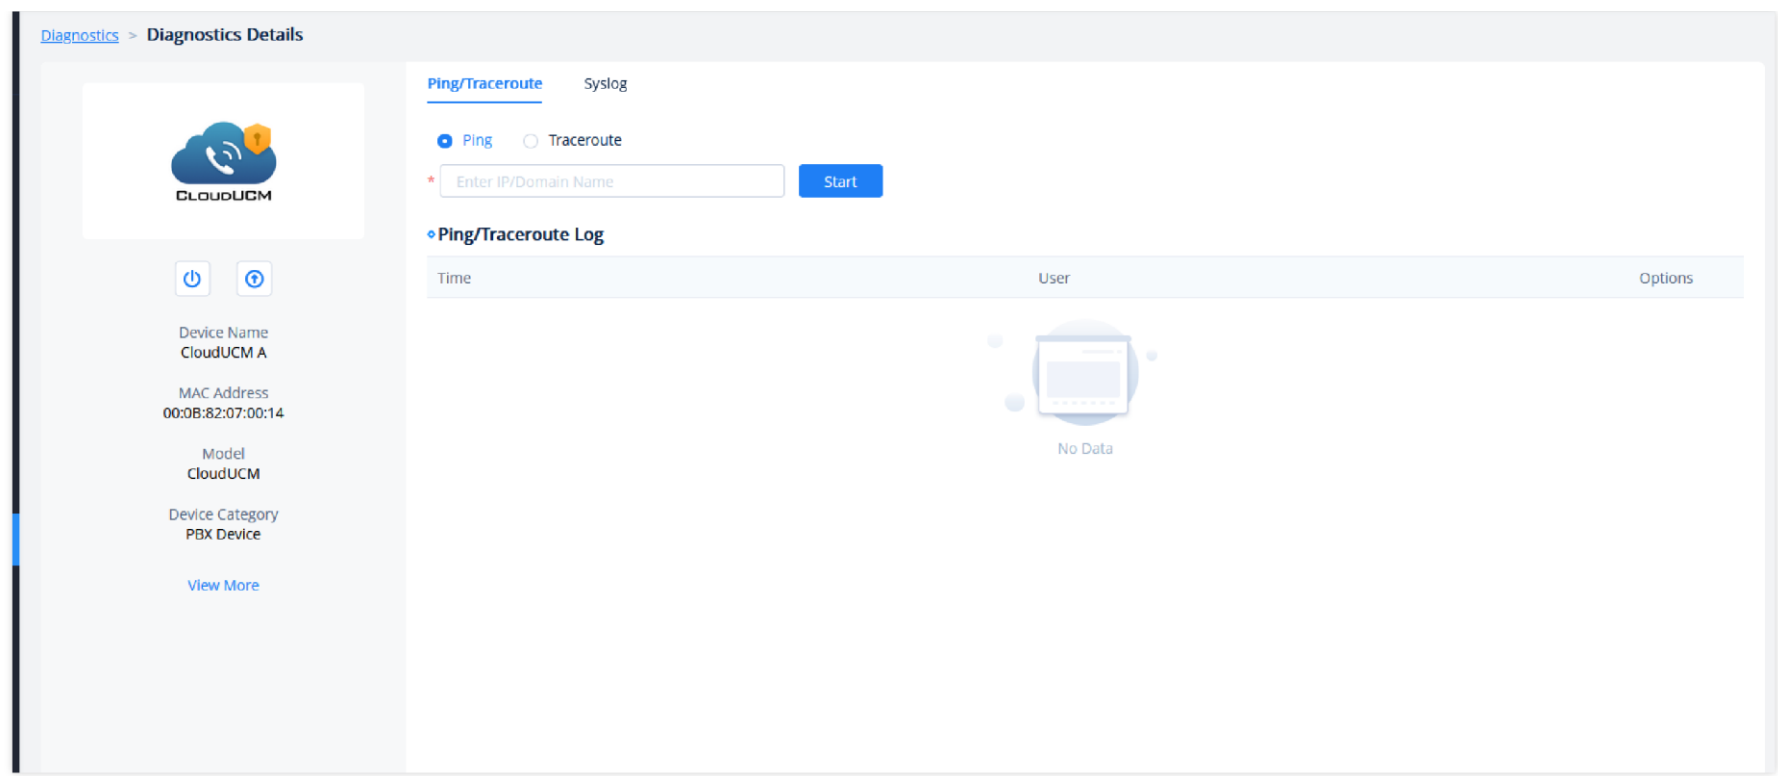

CloudUCM Diagnostic tools

View Device Operation Logs

In the CloudUCM Device List, you can click to view the operation logs of devices. The rules are the same as those for IPPBX devices in the UCMRC System.

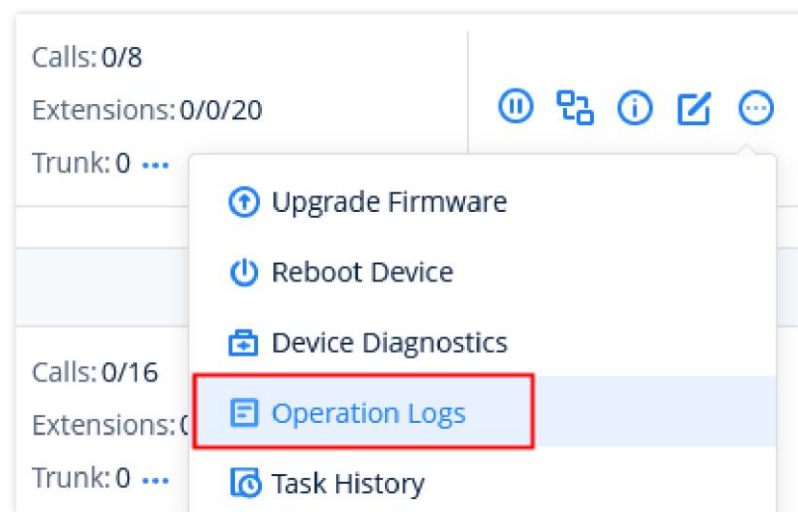

Operation Logs

Factory Reset

You can factory reset a single CloudUCM device. After resetting the device, the firmware version is still used the same one before restoration.

Note


Factory reset will not delete backup files.

Reset CloudUCM Super Administrator Password

1. In the CloudUCM device list, you can click the option



and click the option "Reset Super Administrator Password".

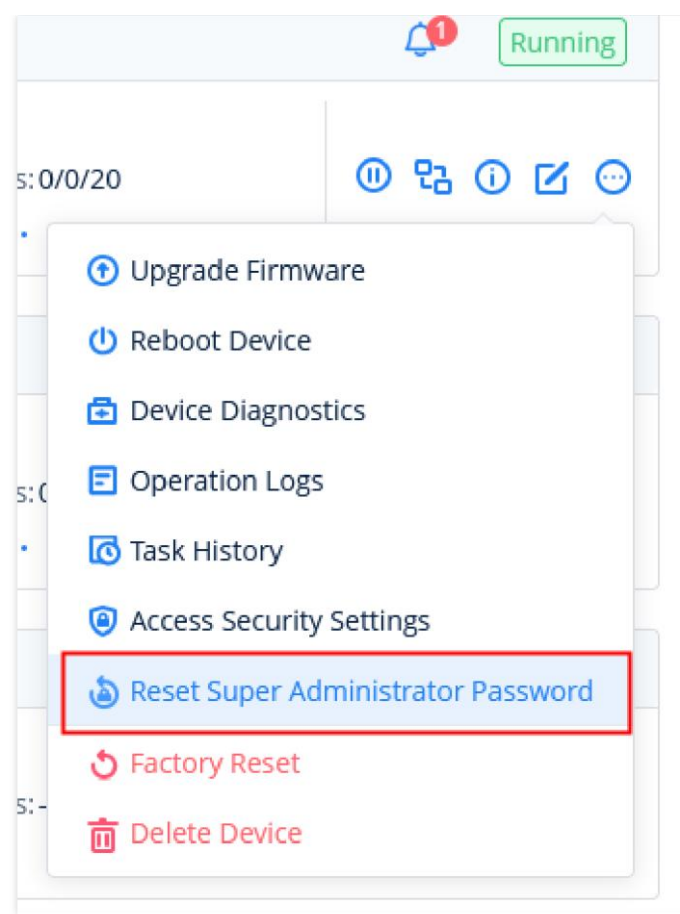


Reset Super Administrator Password

2. After confirming the reset, an email will be sent to the email address of the device administrator:

Note

You will also need to send the 6-digit verification code to the device administrator.

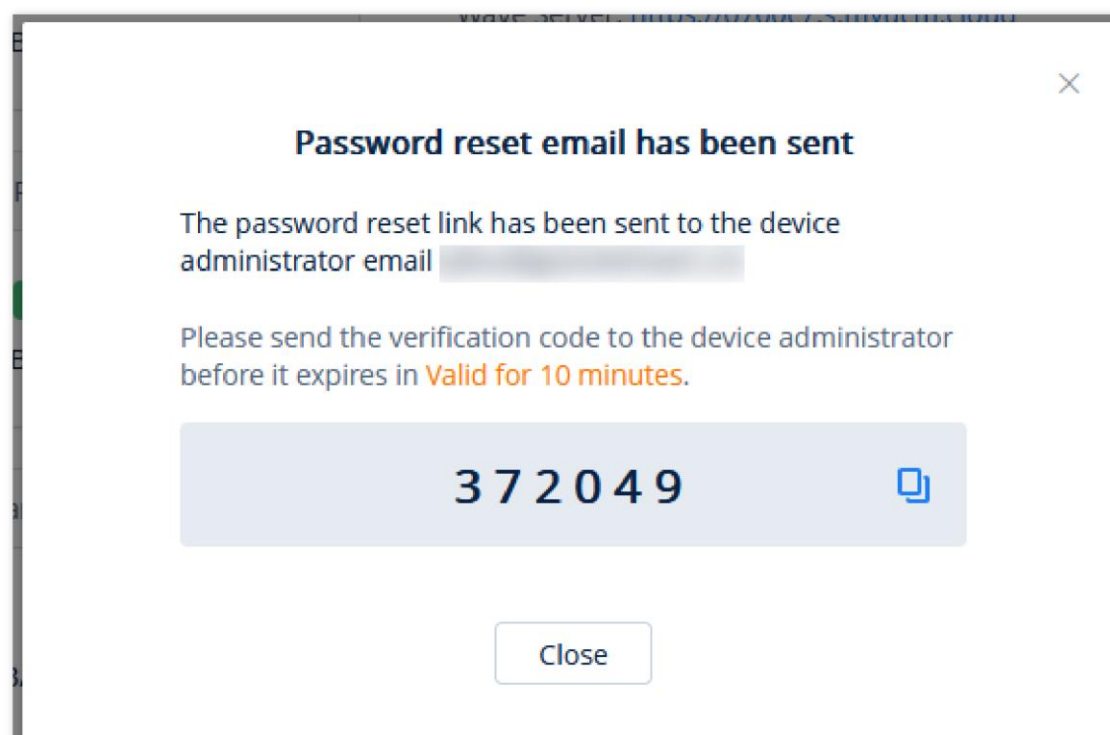

Password Reset

3. The device administrator can click the link in the reset password email and enter the 6-digit verification code, then after the verification passes, the device administrator can enter a new password.



The GDMS administrator has initiated a password reset for your CloudUCM device ([0000000000000000](#)). Please obtain the verification code from the GDMS administrator and open the link below to enter the verification code to reset.

Reset Password Link:

Note: The link is valid for 10 minutes. Please operate at your earliest convenience.

This is an automatically generated email. Please do not reply.

[About Us](#) | [Contact Us](#)

Copyright © 2024 Grandstream Networks, Inc. All rights reserved.

Password Reset

Modify Sites in Batches

Users could edit the site of a batch of CloudUCM devices on the GDMS platform. The default site is "default".

1. Select the desired devices and click on the **"Site Management"** button.

Site Assignment

* Site

default

Tip: A device can be assigned to only one site

Cancel

Save

Site Assignment


2. Select the site to assign the selected devices.
3. Click on the **"Save"** button, and all the selected devices will be transferred to the selected site.

Note

Each device can only be allocated to one single site.


Delete CloudUCM Device

To delete a CloudUCM Device, the user can go click on then click **"Delete Device"** as shown in the screenshot below.

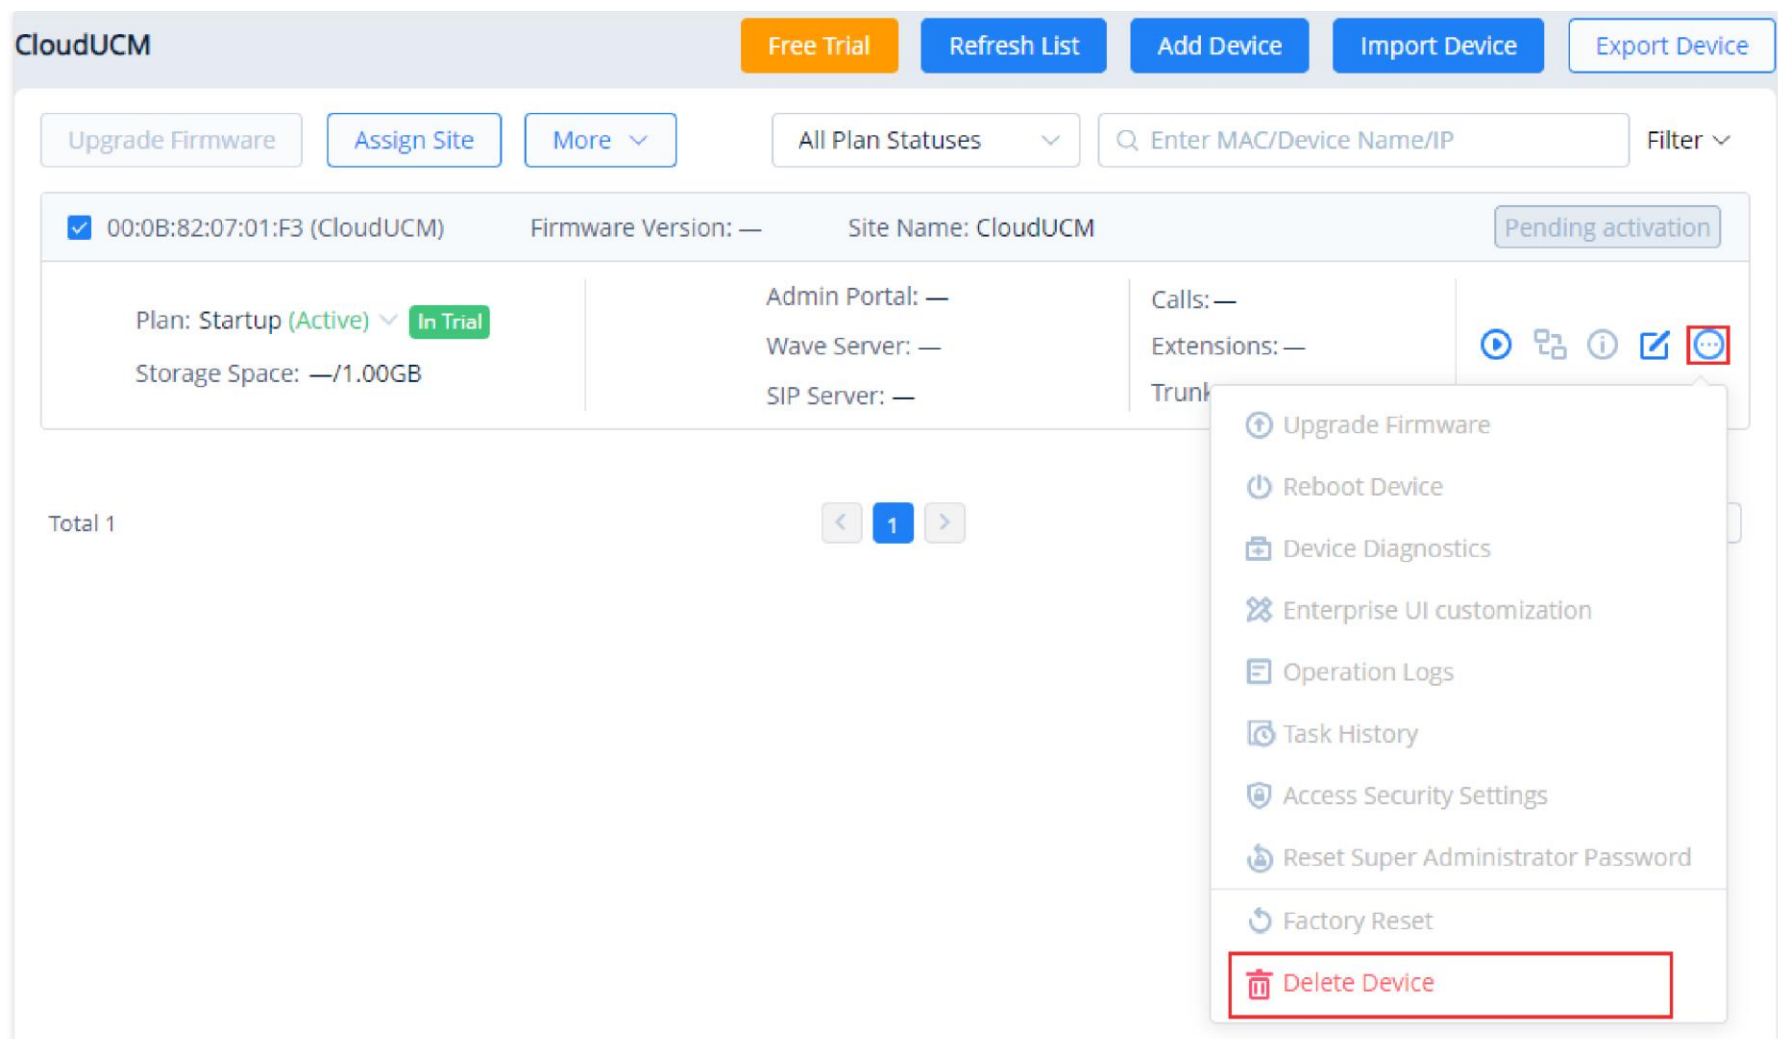

Delete Device


Or, to delete multiple CloudUCM devices at once, please select the device by ticking the box next to the device's MAC address then go to **"More"**, then select **"Delete"**.

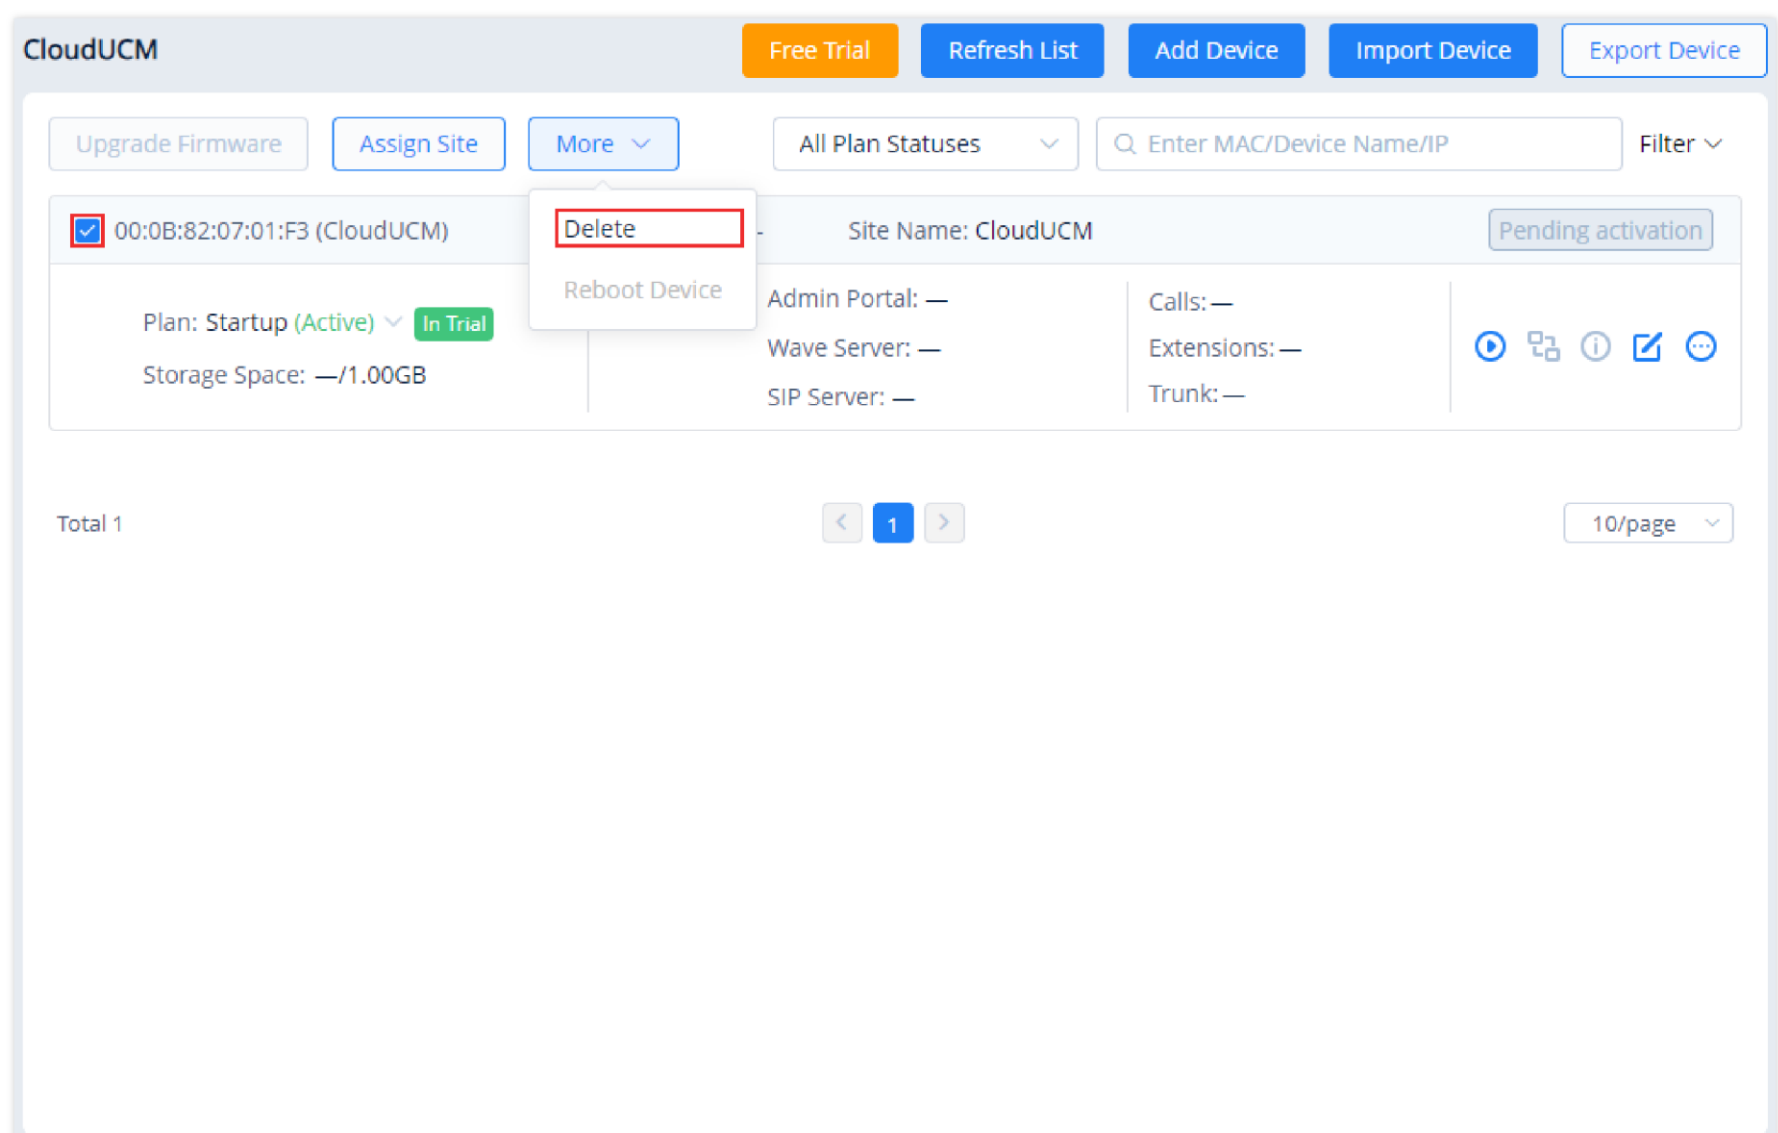

Delete Devices in Batches

Export CloudUCM Device

To export the list of CloudUCM devices, click on [Export Device](#) button. The list created will be in .xls format, and it will include all the CloudUCM devices that are added to the organization. If the user wishes to select the devices to be exported, he/she can tick the box next to the CloudUCM MAC address, then click on **"Export Device"** to export only those selected devices.

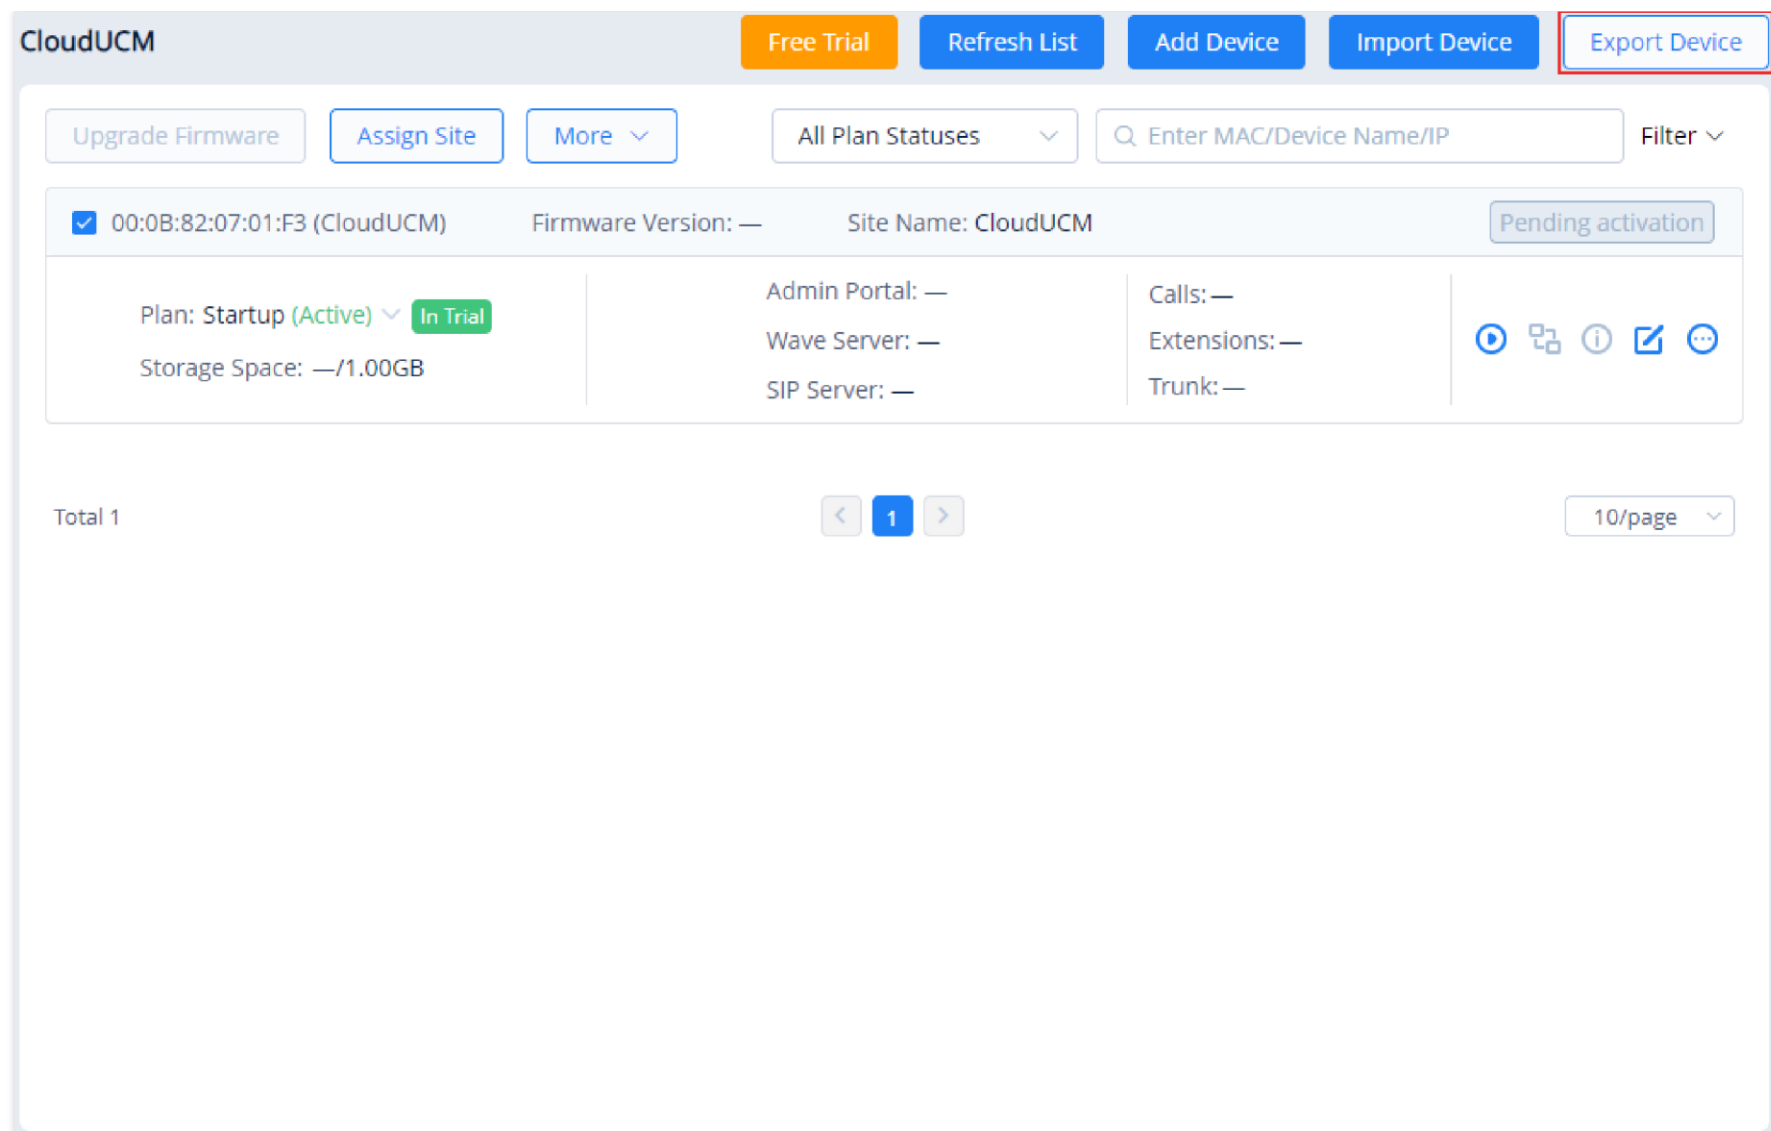

Export Device List

Synchronize CloudUCM Device Alerts to GDMS

1. Users need to enable CloudUCM alert notifications on the management platform of the CloudUCM device. For details, please refer to the CloudUCM User Guide on the CloudUCM product page.
2. The alerts generated in the CloudUCM device will be synchronized to the GDMS platform.
3. Users can view all CloudUCM alert notifications in the GDMS platform and set the alert notification methods: Email Notification, Message Notification, or SMS Notification.

Create a Template for CloudUCM Devices

The GDMS supports creating configuration templates for the CloudUCM devices. A configuration template can be applied either applied to one or multiple site(s), or it can applied to a group of CloudUCM devices. For more information regarding the templates and how they function, please refer to [\[By Model\]](#) and [\[By Group\]](#) sections, respectively, in this user manual.

To create a CloudUCM template, please access either to **Device Template > By Model** or **Device Template > By Group**, depending on your objective explained in the previous paragraph, then click on “Add Model Template” or “Add Group Template”, respectively. Follow the instructions of creating of the template according to the type of the template chosen; once the template has been created, the configuration page will be displayed as shown in the figure below.

By Model > **Set Parameters (TESTTEMPLATE)**

Extension/Trunk

Advanced Call Features

PBX Settings

System Settings

Q Enter Name

Extensions

VoIP Trunks

Outbound Rule

Outbound Blacklist

Inbound Rule

Basic Settings

☐ Enable Basic Settings

Add

Delete

Extension	Call Privileges	SIP Password	User/Wave Password	Options
No Data				

Back

Save

CloudUCM Configuration Template

To understand the role of each option on the template, please refer to the [CloudUCM – User Manual](#)

VoIP Device

The device page shows all the associated VOIP devices. Users can view the information and status of the devices, the allocated account information, etc. GDMS platform supports to allow users to configure parameters, upgrade firmware, reboot/factory reset devices, view device details, device diagnostics, and other operations.

VoIP Device										Refresh List	RPS Management	+ Add Device	Import Device	Export Device
Upgrade Firmware Sync Device Local Configuration More										Q Enter MAC/Device Name/IP				
										All Types				
										All Models				
										Filter				
☐	MAC Address	Device Name	Device Model	Firmware Version	Account Status	Site Name	Push Configuration	Last Config Time	Last Online Time	Options				
☐	EC74:D7:F2:D4:76	476	GSC3565	1.0.1.7	No Account	Default	Enable	15/06/2026 23:00	16/06/2026 09:29					
☐	EC74:D7:F2:D5:05	505	GSC3560	1.0.1.7	No Account	Default	Enable	15/06/2026 23:00	16/06/2026 18:38					

VoIP Device Management

Status	Description
Status Indicator	The device is offline. The current account status is the last reported status before the device is offline.
	The device is online.
	The device network penetration (NAT) is abnormal, the GDMS server cannot connect to the device, but the device can periodically obtain the configuration.

Status	Description
Account Status	Normal: The allocated accounts from the GDMS platform to the devices are registered successfully, and all accounts can be used normally. When an account is registered normally, the extension number will be displayed. Abnormal: Some of the device’s allocated accounts are unregistered. This may be due to the following reasons: ○ The account is not activated. ○ The account registration credentials are incorrect. ○ The account was modified on the device. No Account: The GDMS platform does not allocate any account to the device.
Last Config Time	Synchronizing: If the account and device parameters are modified, the changes will immediately be pushed to the device. This status will be shown while this is happening. Date/Time: The date and time of the last successful provisioning.
Last Online Time	Displays when the device was last online to indicate what time it went offline. This field indicates the date and the exact hour and minute when the device went offline.
Call Status	Idle: The SIP account is in an idle state. Busy: The SIP account is on a call.
HS Status	☒ The SIP account is configured on the handset. ☐ The SIP account is not configured on the handset.

VoIP Device Management

Operation	Description
Sorting	Click on the sorting buttons  to sort the list by various columns in ascending/descending order.
Custom Display Option	Click on the  button on the top right corner of the list to select the columns to show and/or hide.
Search	In addition to being able to search for devices with the search bar near the top-right corner of the page, users can further refine search results by clicking on the Filter button by specifying account status, device status, site, city, and firmware version.

Operation Instructions

Upgrade Firmware

Site Assignment

More ▾

Refresh List

All Models ▾

Q

Enter MAC/Device Name/IP

Filter ^

All Cities ▾

All Account Status ▾

All Device Status ▾

Site ▾

All Firmware Version ▾

Search Devices

Add a SIP endpoint

To add a new device to GDMS, click on the **Add Device** button. The following window will appear:

Add Device (To Custom AAA)

* MAC Address

:

:

:

:

Cancel

Next

Add VoIP Device Step 1

Enter the device name with the serial number, then select the site to which the SIP endpoint belongs.

Add Device (To Custom AAA)

Device Name

Enter Device Name (up to 64 characters)

* S/N

Enter S/N

* Site

Default

Sync configuration

If enabled, when the VoIP device goes online, its local configuration and SIP accounts will be synced to GDMS.

GDMS mobile app supports convenient features such as adding devices via bar code scanning and more!
[Learn More](#)

Prev

Save

Add Device Step 2

i

- Users could click on the “Save” button to save the configuration.
- Each device can only be associated with only one GDMS account.
- Users can use the search bar on the Device page to find added devices via device name, MAC address, and sites.

Batch Import VoIP Devices

Users can import multiple devices by uploading a file. Click on the **Import Devices** button on the **Device** page to get started. The following window will appear:

Import Device

×

!

Please use the following templates to create compatible imports. [Device Template](#)

Click or drag and drop file here to upload

File types .xls and .xlsx are supported

Sync Configuration

If enabled, when the device goes online, its local configuration and SIP accounts will be synced to GDMS.(If the device is already on GDMS, only the device information will be updated after syncing.)

Cancel

OK

Import VOIP Device

1. Click on the

button to download the template. Users must follow the instructions to enter the required information.

Instructions:

1. Fields marked with * are required and cannot be empty.

2. MAC Address: Valid characters are 0-9, A-Z, hyphens (-), and colons (:) (e.g. 00-15-65-1A-2B-3C, 00:15:65:1a:2b:3c, 0015651a2B3c, etc.). If users want to assign accounts to multiple devices, they must enter the MAC addresses in multiple lines.

3. Serial Number: Required if users want to add new devices to GDMS. Only alphanumeric characters allowed.

4. Device Name: The maximum allowed number of characters is 64 characters.

5. Site Name format: 1st Level Site/2nd Level Site/.../New Site. Users must enter the names starting from the 1st Level Site. If the higher level sites do not exist, they will be created automatically. If no higher level site name is entered, this site name will be used by default to fill in missing site names. The maximum allowed number of characters is 64 characters.

*MAC address	*SN	Device Name	Site Name

Import VoIP Device Template

2. The template will have the following fields:

MAC Address	Users need to fill in the MAC address of the device in this field (Required). For instance, 000B82E21234, and it supports to fill "." and "-" characters in this field.
SN	Users need to fill in the serial number of the device in this field (Required).
Device Name	This option is used to set the name of the device so that the users could identify this device (Optional). The maximum number of the input characters is up to 64.
Site Name	Enter the site to assign this device to (Required). If the site is under more than one level, all site levels must be included in the site name (e.g. first_level/second_level/.../new_site). If the site level does not exist, it will be automatically created. Maximum character limit is 64.

Import VoIP Device Template

- Users can drag the file to the pop-up window, or they can click the upload button to select a file from their PC to import.
- Once the file is imported into GDMS, the result window will appear. If any data failed to import successfully, users can export the problematic data, re-edit, and attempt to import them into GDMS again.
- The user can choose to sync the devices' configuration by enabling "Sync Configuration". Once that is enabled, the local configuration and SIP accounts will be synchronized to the GDMS.



- If an existing device on GDMS is imported, the device's existing information will be replaced with the newly imported information.
- If a device's MAC address and serial number are invalid, the import will fail.

Configure SIP Account (Non-DP Devices)

Users can configure SIP accounts for each device from the **Device** page.

1. In the devices list, click on the icon



corresponding to the account to access the Account Configuration page.

2. After clicking the button, users will see the Account configuration page as the figure shows below:

VoIP Device > Account Configuration (WP820_1 C0:74:AD:3C:F3:C2)

Account	User ID	Server
Account1	106	UCM6302_LAB(TLS) (192.168.5.167:5061)
Account2	Select	UCM6302_LAB(TLS) (192.168.5.167:5061) UCM6302_LAB(UDP) (192.168.5.167:5060) local_2021-06-15 08:56:33.862 (192.168.10.3) local_2021-06-15 08:56:33.862 (192.168.10.3)

Configure SIP Account

3. On this **Account Configuration** page, users can select the SIP accounts created on the **SIP Account** page to assign to the device.
4. Users could also select to replace the existing SIP account with a specific account or delete the existing accounts.
5. Click on the **Save and Apply** button. The accounts will then be assigned to the device.



- If a device is offline during the account assignment, GDMS will synchronize any changes to it the next time it goes online.
- Settings configured via other means (e.g. endpoint device web portals, Zero Config provisioning, etc.) will not be synchronized to GDMS.

Configure SIP Account/Line (DP Devices)

Users could configure SIP accounts and lines for DP devices. GDMS platform allows users to view the existing SIP accounts for current devices and edit/delete the accounts.

1. In the devices list, click on the icon



corresponding to the account to access the Account Configuration page.

2. After clicking the button, users will see the figure as shown below:

Device List > Account/Line Configuration (rjyao-dp 00:0B:82:E5:8C:CD)

Account ConfigurationLine Configuration

Account	User ID	Server Name	Server Address	* Profile	HS Mode
Account1	4039	192.168.126.16	192.168.126.167	Profile1	HS1
Account2	Select		0.0.0.0	Profile1	Circular
Account3	4044 (Assigned)		192.168.126.16 (192.168.126.167)		Circular
	4045 (Assigned)		192.168.126.16 (192.168.126.167)		
Account4	4046 (Unassigned)		192.168.126.16 (192.168.126.167)		Circular
	4047 (Assigned)		192.168.126.16 (192.168.126.167)		
Account5	4048 (Unassigned)		192.168.126.16 (192.168.126.167)		Circular
	4039 (Unassigned)		192.168.126.16 (192.168.126.167)		
Account6	4040 (Assigned)		192.168.126.16 (192.168.126.167)		Circular
Account7	Select		0.0.0.0	Profile1	Circular
Account8	Select		0.0.0.0	Profile1	Circular
Account9	Select		0.0.0.0	Profile1	Circular
Account10	Select		0.0.0.0	Profile1	Circular

CancelSave and Apply

Configure SIP Account for DP Devices

User ID	Allocated: This SIP account has already been allocated to other devices; Unallocated: This SIP account has not been allocated to any device.
Profile	Different SIP servers cannot be set to the same profile.
HS Mode	If this field is not filled, the default setting is “Circular” mode.

Configure SIP Account for DP Devices

3. To configure the lines for each HS mode, click on the **Line Configuration** tab.

Device List > Account/Line Configuration (rjyao-dp 00:0B:82:E5:8C:CD)

Account ConfigurationLine Configuration

	Line1	Line2	Line3	Line4	Line5	Line6	Line7	Line8	Line9	Line10
HS1	4039	None	None	None	None	None	None	None	None	None
HS2	None	None	None	None	None	None	None	None	None	None
HS3	None	None	None	None	None	None	None	None	None	None
HS4	None	None	None	None	None	None	None	None	None	None
HS5	None	None	None	None	None	None	None	None	None	None

CancelSave and Apply

Line Configuration

 Set up a line account for each handset and select the SIP accounts from the configured accounts in the device

4. Select the desired SIP accounts to use for each line and handset.

5. Click on the button **Save and Apply** to allocate the SIP accounts or lines to the devices.



- If a device is offline during the account assignment, GDMS will synchronize any changes to it the next time it goes online.

- Settings configured via other means (e.g. endpoint device web portals, Zero Config provisioning, etc.) will not be synchronized to GDMS.
- For device-specific configuration rules, please refer to the DP device user guide.
- GXW4500 series and GXW42xx series are supported on the VoIP Device module.


Device Parameters Configuration

Users can modify the configuration parameters for a single device.

1. In the device list, click on the



button to go to the **Device Parameters Configuration** page, as shown in the figure below:

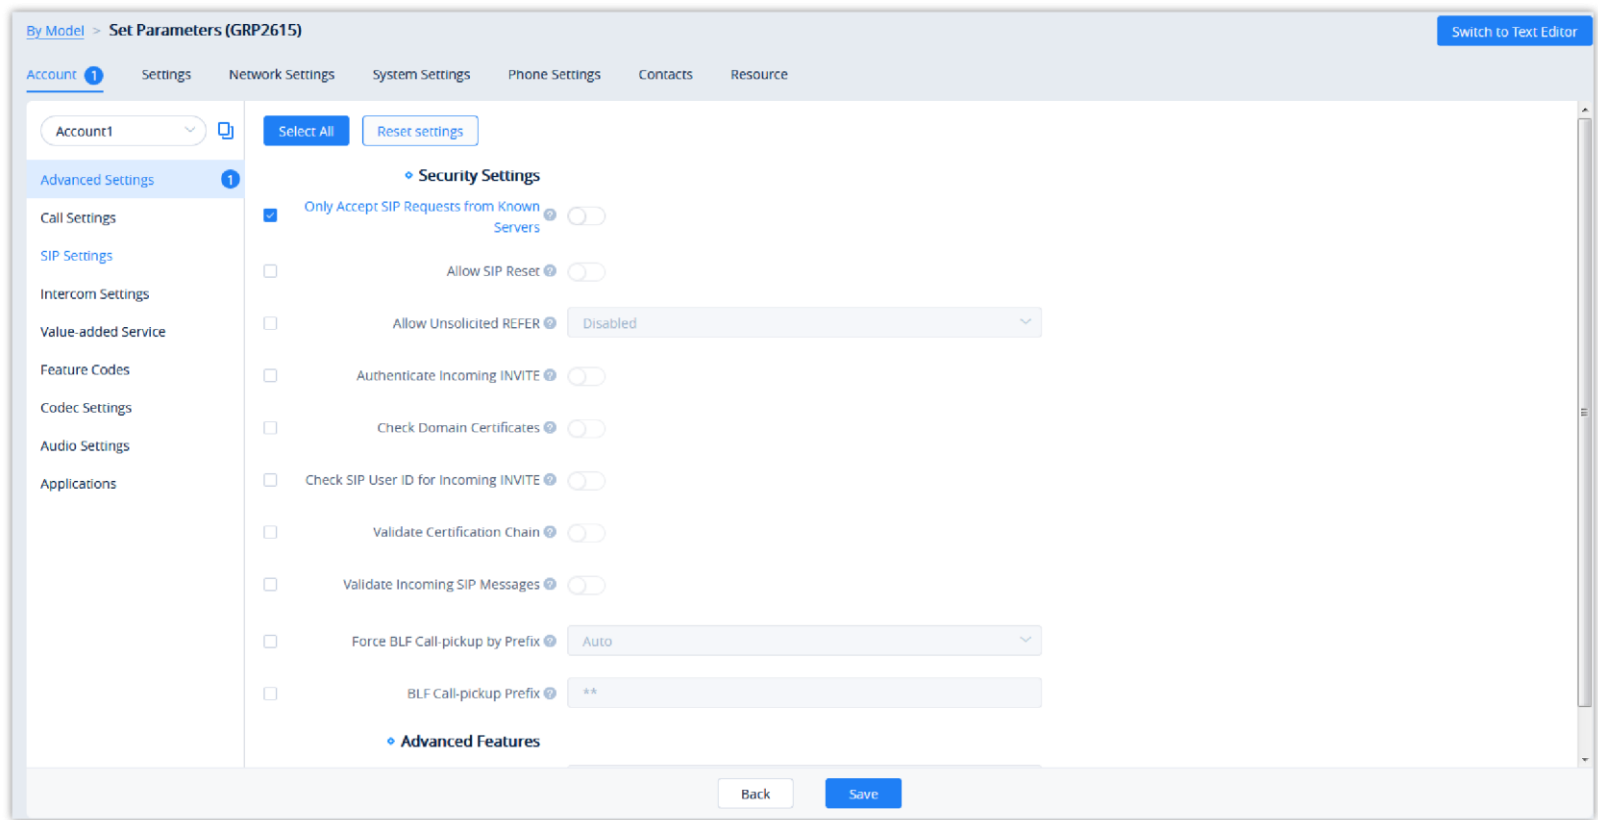


Device Parameter Configuration

- Clicking on the **Select All** button will select every option on the current page. Clicking on it again will deselect all the options.
- Clicking on the **Reset Settings** button will restore all settings on the current page to default values.
- Clicking on the button




following the account, users can copy and paste the current account configuration to other accounts.

- When users try to configure the device wallpaper or screensaver image, users can select a picture from the resources list, or upload the local picture to GDMS and configure it to the device.

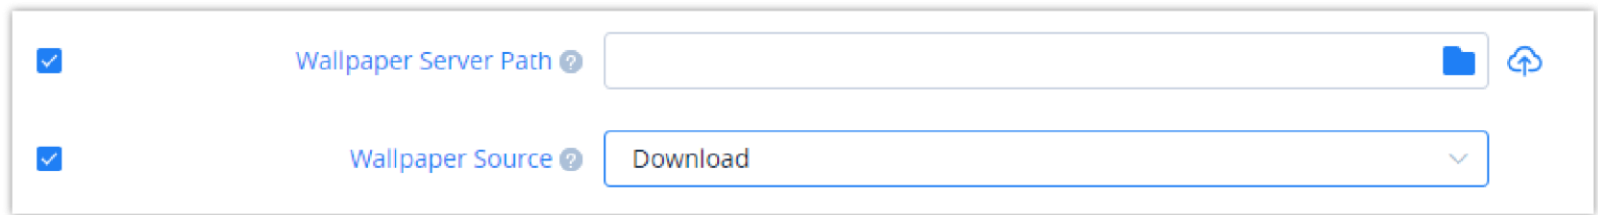

Ringtone Configuration

2. Modify the desired settings on the page or click on the **Switch to GUI Editor** to configure device settings via text editing (i.e. p-values).

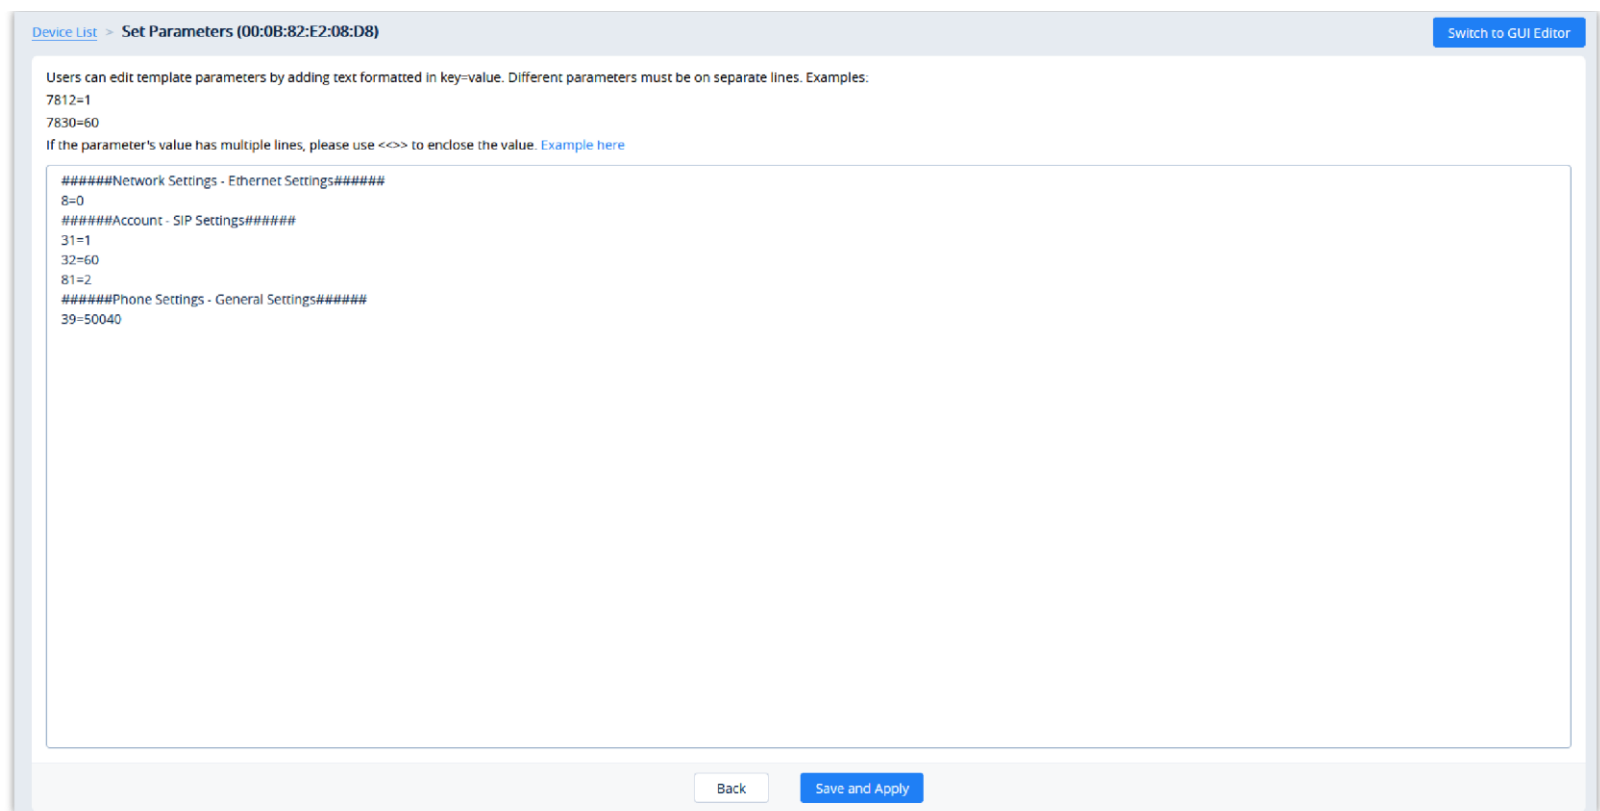

Edit Configuration File

- The format requirement is key=value. The key can be either a P-value or an alias.
- Users can enter the latest parameters and values of a device in the text editor even if the GDMS configuration page does not display the configuration options.

3. Click on the **Save and Apply** button to finalize changes. Only settings that are checked will be pushed to the device.




- If the device is not connected to the GDMS platform currently, the device cannot be synchronized with the GDMS platform.
- When the device is connected to the GDMS platform, the allocated accounts will be synchronized on the device immediately.
- The SIP accounts that are configured manually on the device will not be synchronized to the GDMS platform. For the configuration rules, please refer to the User Guide of the devices.

MPK Stickers Printing

Certain Grandstream IP phones have an MPK sticker placement (GRP2604, GRP2634, GRP2636, GXP2130, GXP2160) to label the MPKs as the user desires. GDMS offers a way to print the stickers when configuring the devices.

You can select whether to print the background color, whether to display the border, or whether to print repeatedly on the A4 paper.

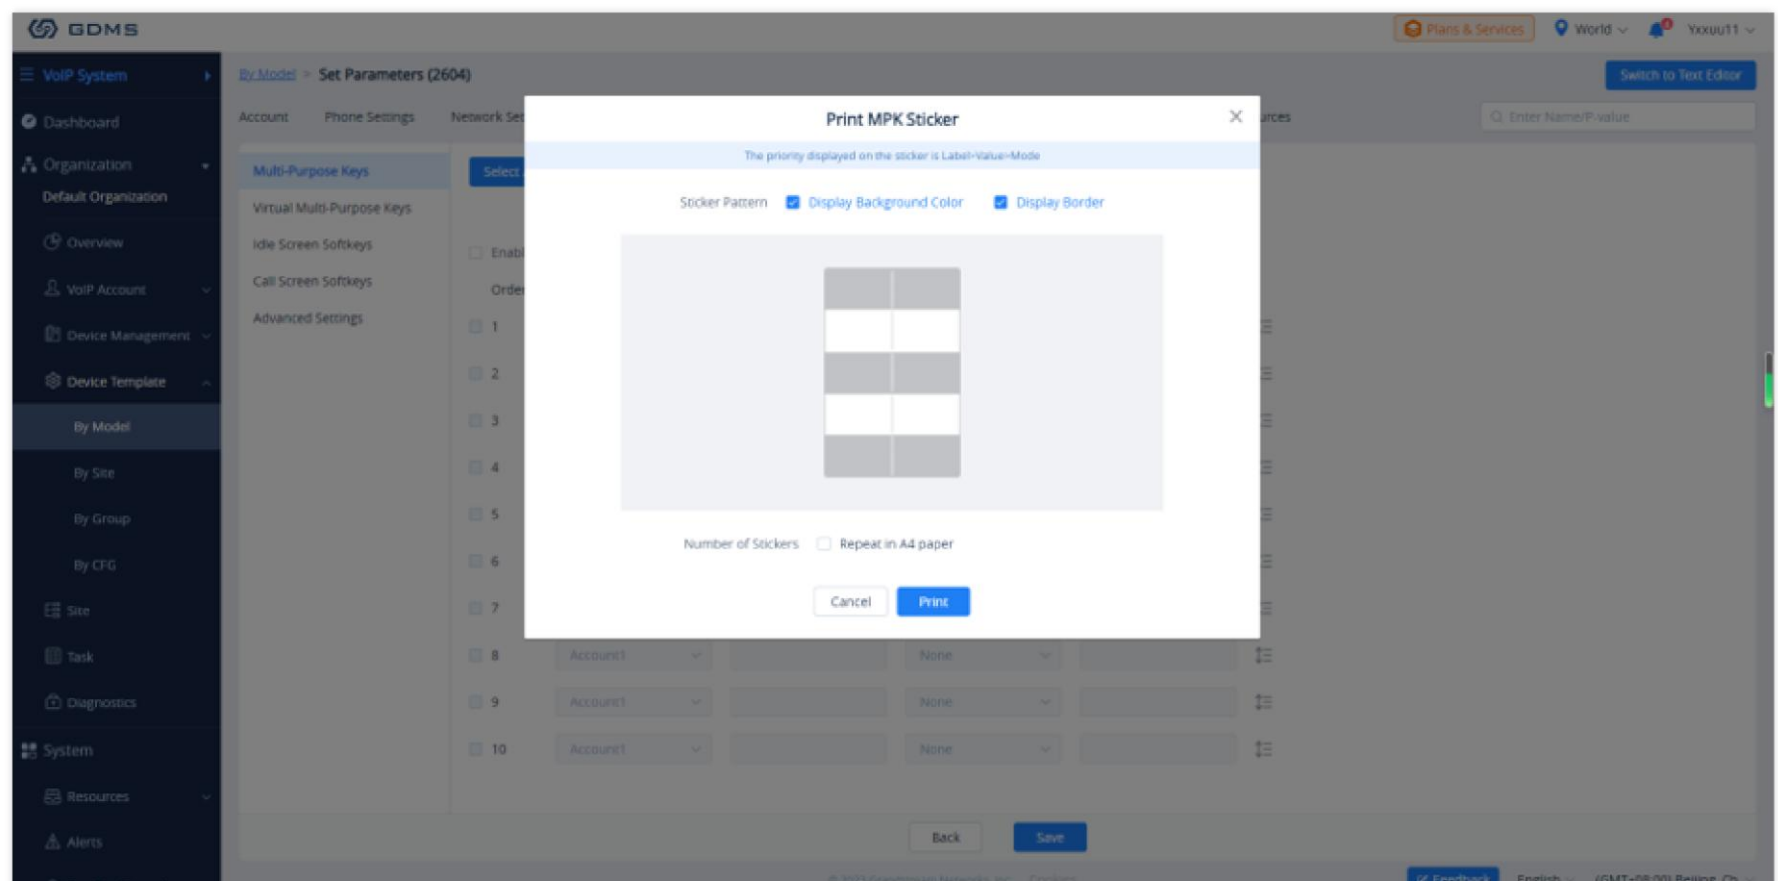

Print MPK Sticker

When the user prints the MPK sticker repeatedly on an A4 paper, it will be displayed as follows.




Multiple MPK Stickers

If you want to print on the native sticker provided with the IP phone unit. Please refer to the following video:

https://v.youku.com/v_show/id_XNDc3MDczOTlwOA==.html

Upgrade The Firmware

You can select the firmware path from the existing firmware resource list or directly upload your firmware file by clicking the “Upload” button following the option. Please refer to the screenshot below.

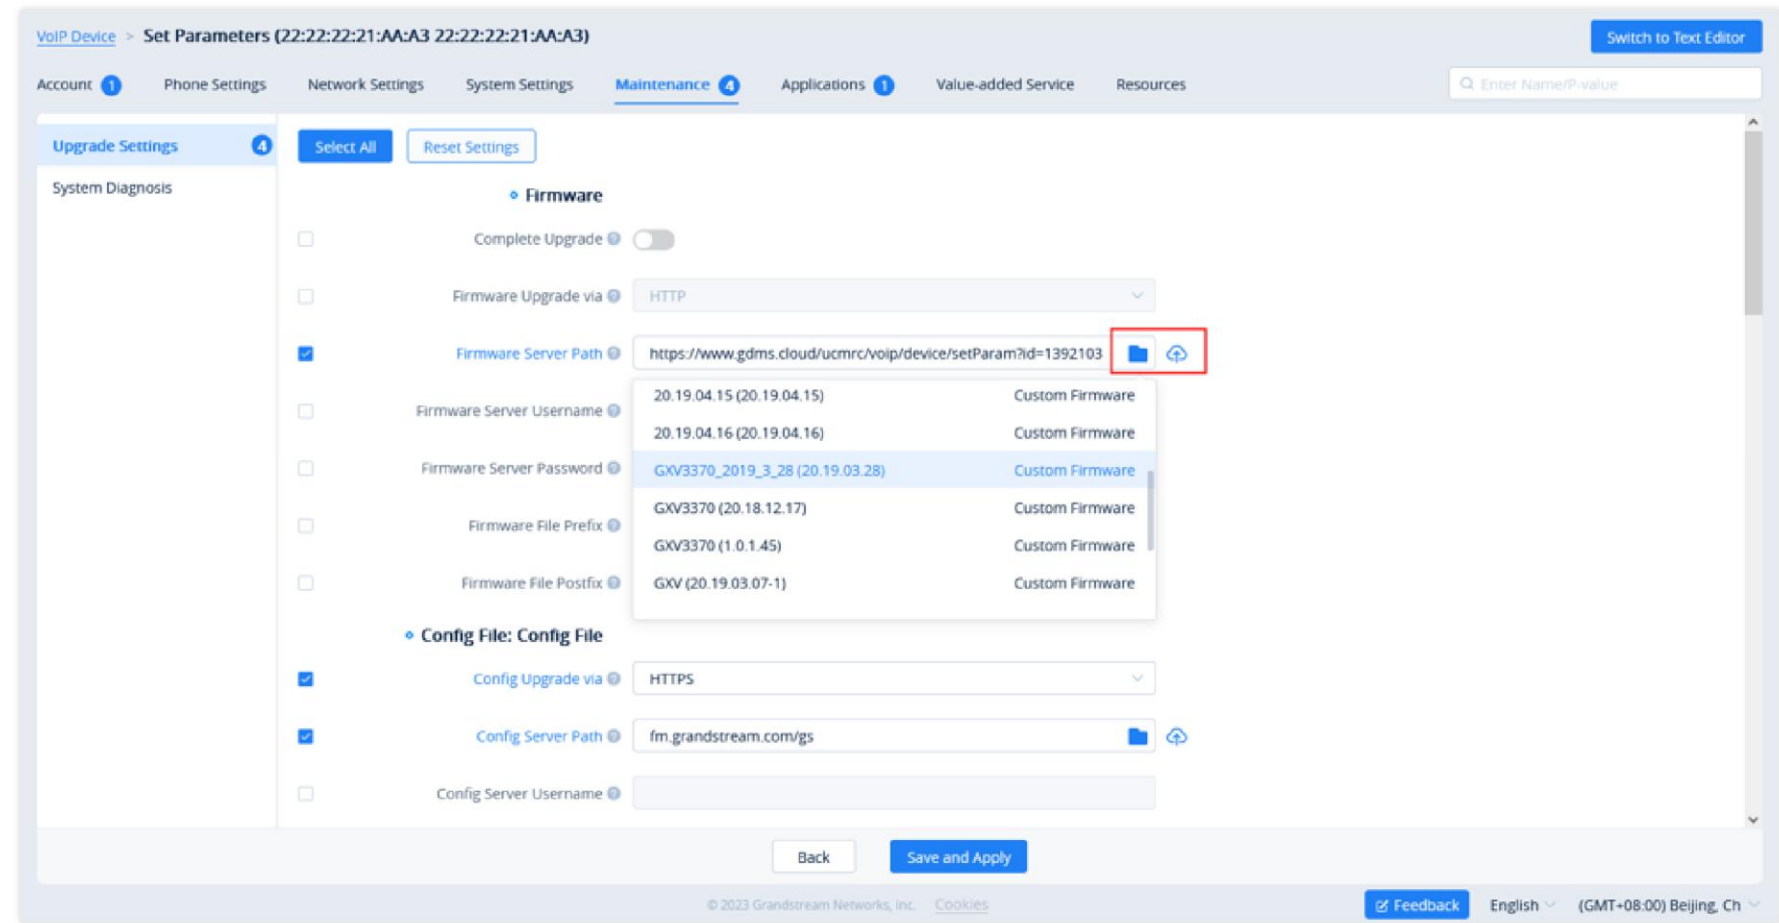

Upgrade Settings Firmware


Configure Resource Files

Users can configure custom ringtones and languages for devices (Supported models: GXP/DP series).

1. On the Device list, click on the



button to go to the **Device Parameters Configuration → Resource Configuration** page, as shown in the figure below:

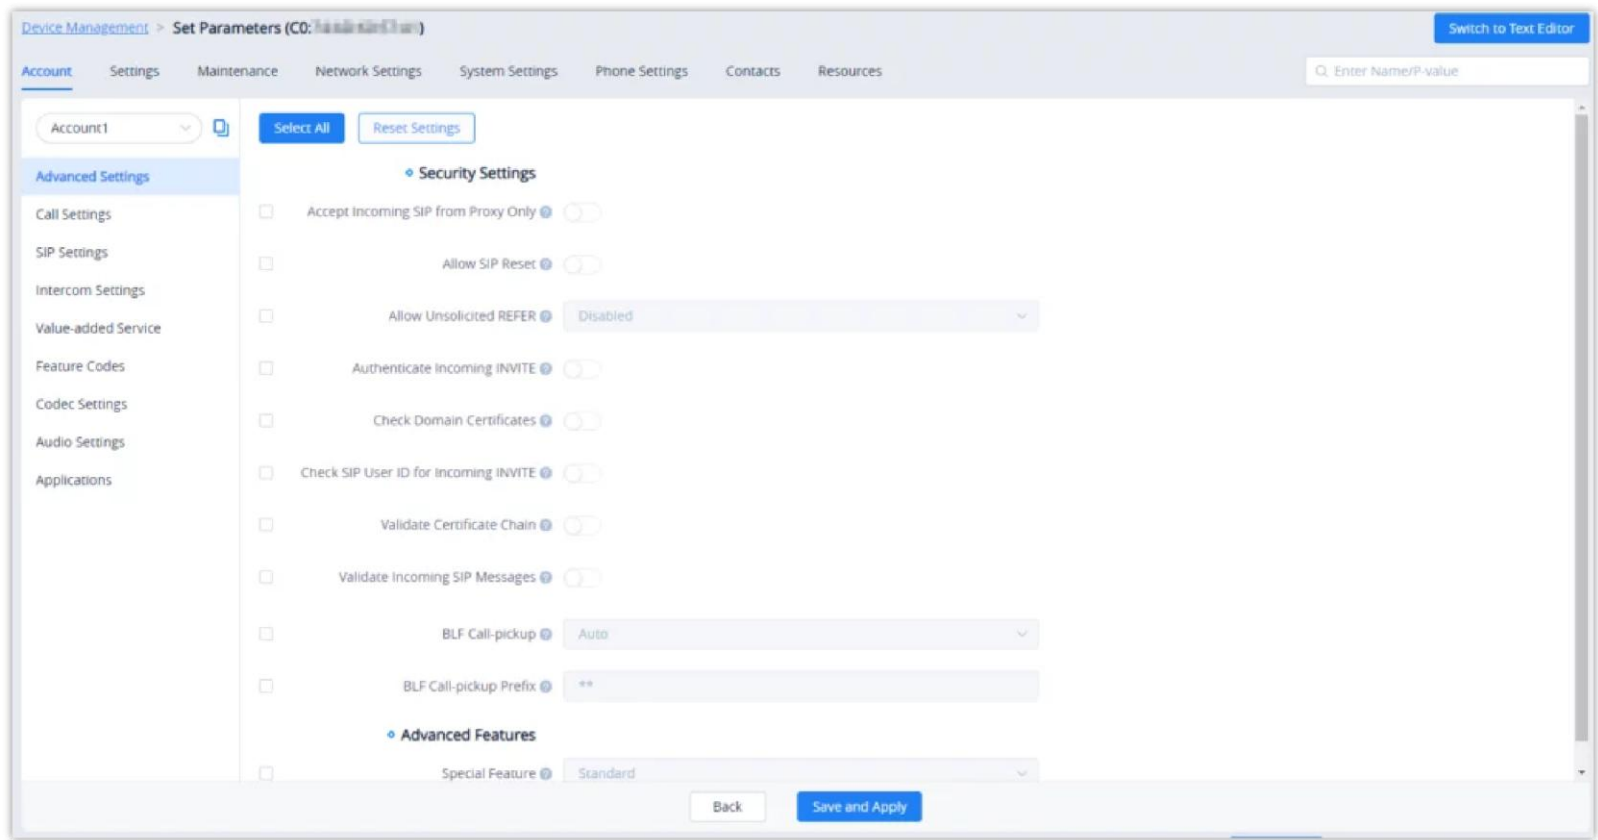

Resource Configuration

2. On the “Custom Ringtone” page, for Ringtone 1 to Ringtone N, select a ringtone file from the resources for each ringtone index.
3. On the “Language Configuration” page, select a language pack from the resources for the device.
4. Click on the “Save and Apply” button, the device will download the selected resources from the firmware path.

i For each device model, the size and duration of each ringtone are different. If the duration and size exceed the limit, the system will intercept the resource file to the maximum limit automatically.

Synchronize Device Local Configuration

Before the device is configured, the user can synchronize the device’s local configuration to the GDMS server.

1. Select a specific device, click icon



and select the option **“Synchronize Device Local Configuration”**.

2. Click **“OK”** to confirm synchronization on the pop-up window. Then, the GDMS server will synchronize all the account configurations and parameters of the current device to the GDMS server.
3. Enable Sync SIP Account if you wish to have your SIP accounts synchronized to the GDMS.

i

- If the device’s parameter configuration conflicts with the server’s configuration, the device’s local configuration prevails.
- If the account on the device does not exist on the GDMS server, the SIP account and server are automatically created on the GDMS server.
- This option can be turned on only for the devices which are online.

Disable Push Configuration

If the user does not want to push any configuration to the device through the GDMS server, please follow the steps below:

- 1. Select a specific device, click icon



and select the option “**Disable Push Configuration**”.

- 2. Click “**OK**” to confirm the operation, the account configuration or parameters will not be pushed to the device through the GDMS server anymore, including the scheduled tasks. The configuration that has not been pushed to the device will not be pushed to the device anymore.

i If the user wants to resume pushing the configuration or parameters to the device, the user can click the “Enable Push Configuration” option to operate in the GDMS server.

View VoIP Device Details

Click on the button to view a specific device’s system information and account status.

Device Model	Firmware Version	Account Status	Site Name	Push Configuration	Last Config Time	Options
GRP2603	1.0.3.83	No Account	Default	Enabled	Not configured	
GXV3450	1.0.1.13	No Account	Default	Enabled	Not	Device Details Operation Logs Task History Edit Device Authorization Management Transfer Device Disabled Push Configuration Sync Device Local Configuration Remote Access to Web UI Remote Access to Device Interface Reboot Device Factory Reset
WP825	1.0.11.22	No Account	Default	Enabled	Not	
HT801	1.0.43.6	No Account	Default	Enabled	Not	
GRP2601	1.0.3.57	No Account	Default	Enabled	202	
GRP2613	1.0.5.93	No Account	Default	Enabled	Not	

View VoIP Device Details

System Information

The device details include System information, Network information, Account status, etc.

VoIP Device > Device Details (C074AD224D32 C0:74:AD:22:4D:32)	
System Information	Account Status
Last Restart Time 07/12/2021 01:26AM (Reboot via device)	
Hardware Version	GRP2601PV1.3A
Software Version	0.4.4.14
MAC Address	C0:74:AD:22:4D:32
S/N	20EZ41KL30224D32
OpenVPN® IP	10.10.1.6
IPv4	
Address Type	Static
IPv4 Address	192.168.126.192
Subnet	255.255.255.0
Default Gateway	192.168.126.1
DNS Server 1	192.168.121.118
DNS Server 2	
IPv6	
IPv6 Address Type	

 The information on this page is obtained from the device in real time. If the device is offline, the details page will be inaccessible.

Account Status

VoIP Device > Device Details (C0:74:AD:27:76:65)

System Information

Account Status

Energy Saving Inform

Account	User ID	Server Name	Server Address	Account Status
Account1 Local	1008	192.168.5.142	192.168.5.142	Unregistered

Copyright © 2023 Grandstream Networks, Inc. All Rights Reserved.

[Cookies](#)

[Feedback](#)


English

(GMT+01:00) Casablanca

Device Details

Energy Saving Inform (GRP Series Only)

If you are viewing the details of a GRP series IP phone, an additional tab will appear **Energy Saving Inform**. This tab contains information about your GRP device power usage. It provides information about which Energy Saving Mode has been configured on your device, the percentage of the energy saved, whether Deep Energy Saving has been enabled, and information about when the Energy Saving has been enabled with all the related information of how much energy has been saved and how long the phone has been operational under energy saving mode.

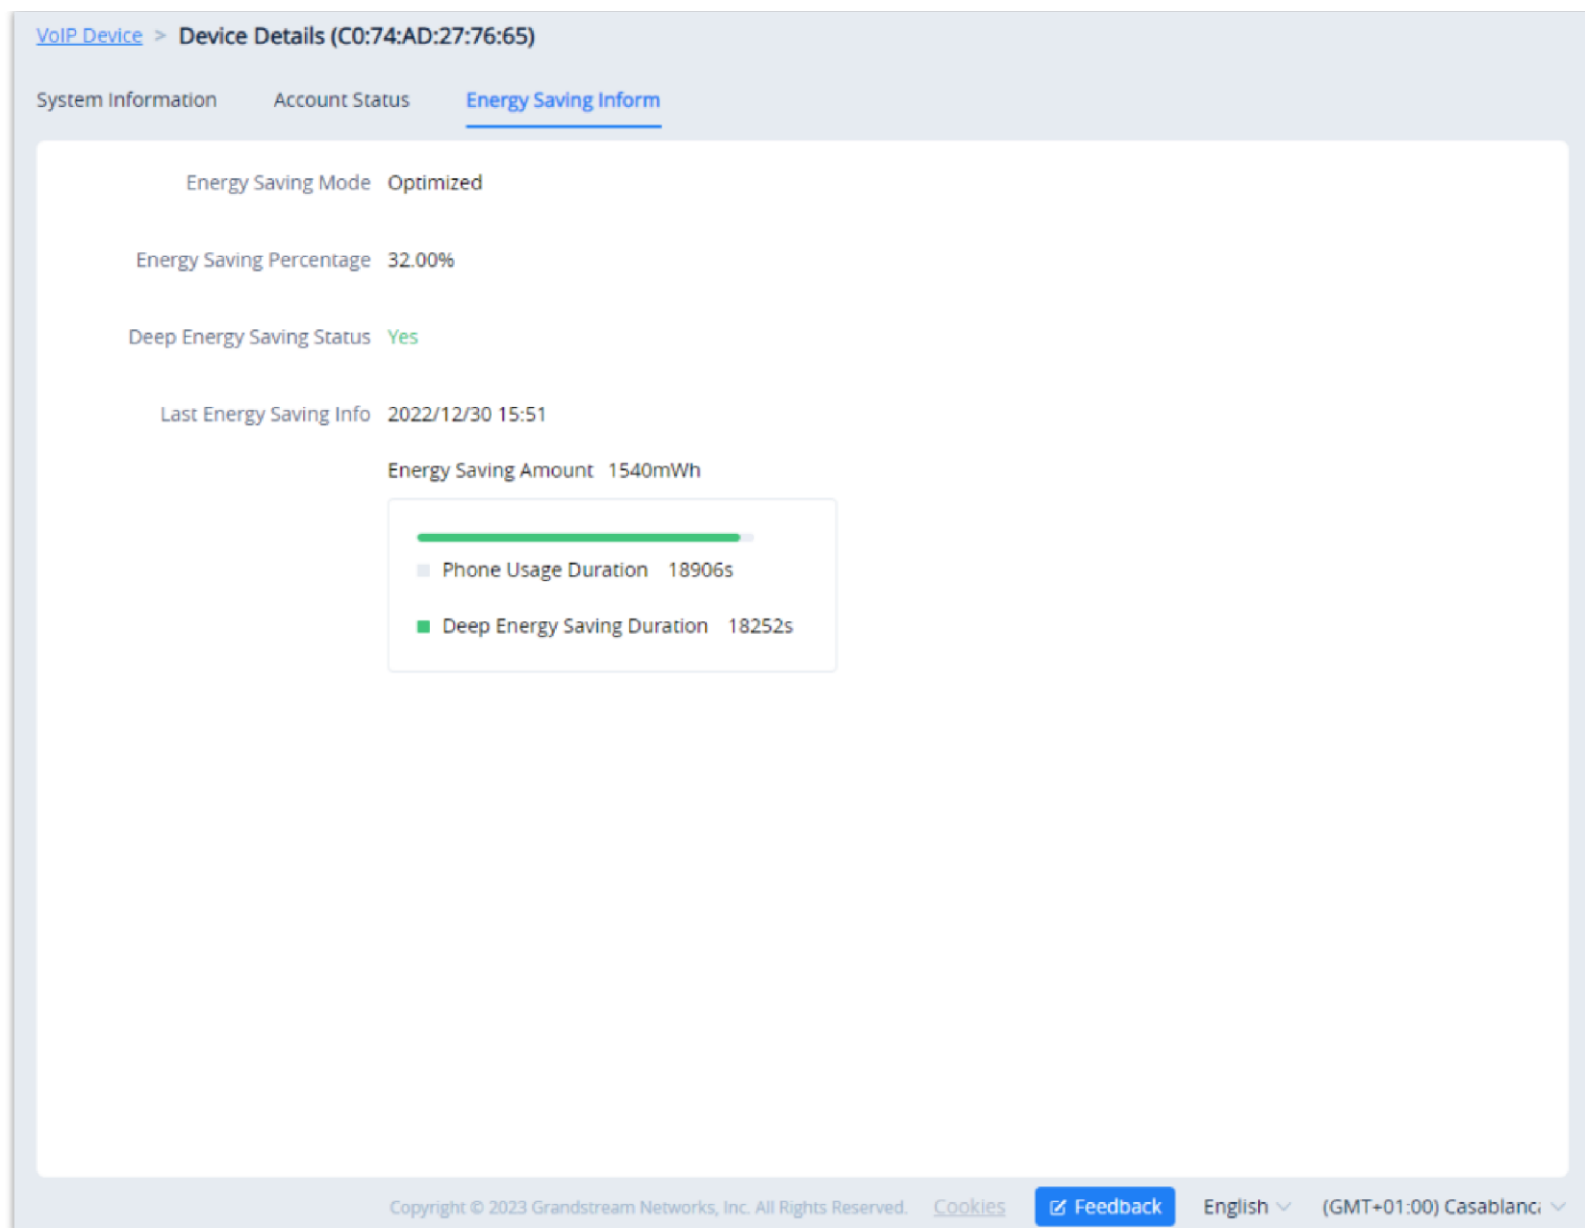

Energy Saving Inform


Edit VoIP Device

Users could edit the Device name and which site the device belongs to.

1. In the device list, click on the button



that follows the device, and select **Edit Device** to access the device editing page.

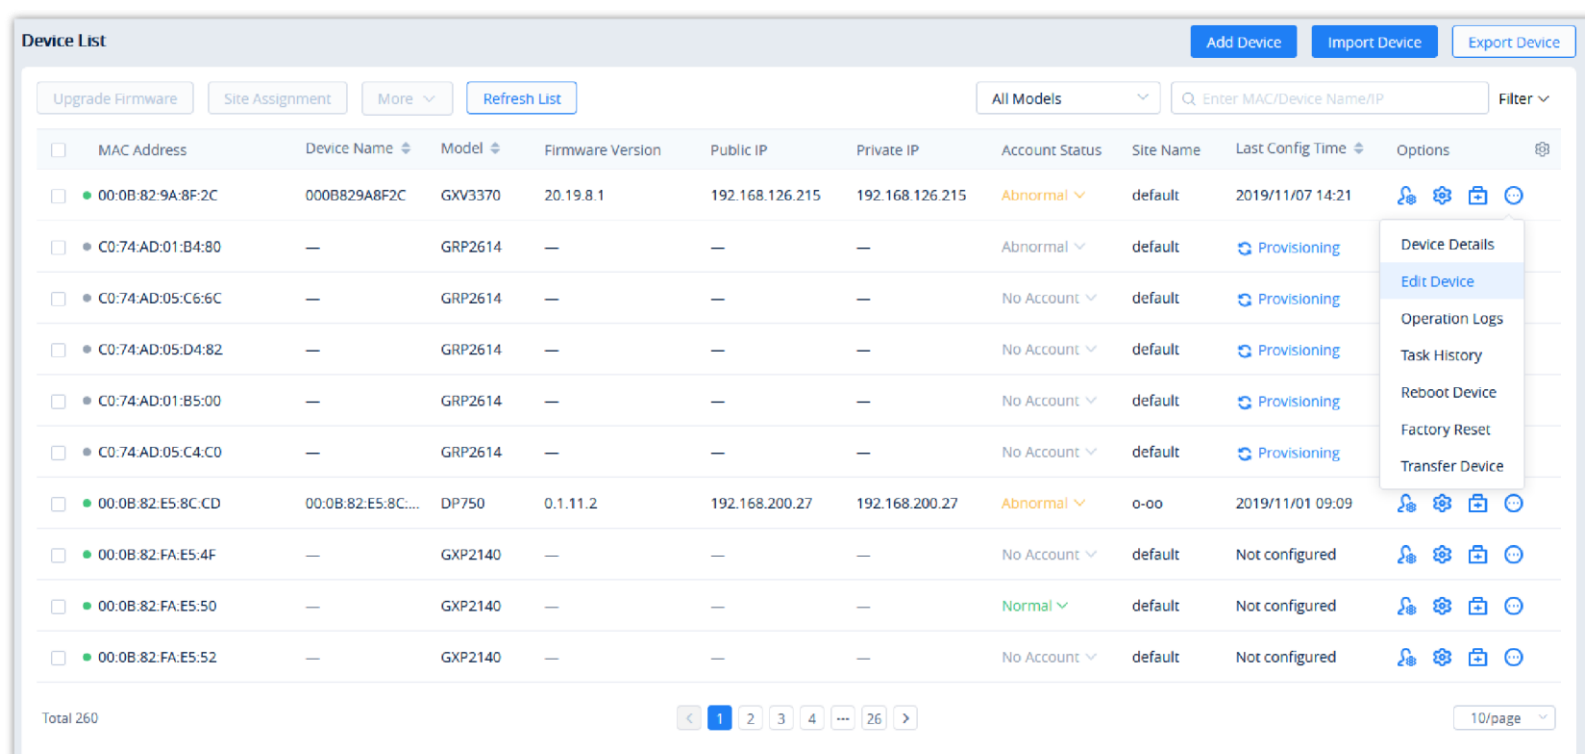

Edit VoIP Device Option

2. Users will see the device editing page as the figure shows below:

Edit Device

MAC Address 00:0B:82:E5:8C:C9

Device Name

* S/N

* Site

Cancel

Save

Edit VoIP Device

3. Click on the **Save** button to apply the changes on the GDMS platform.

Remotely Access VoIP Device Web UI

GDMS allows administrators to remotely access and manage VoIP devices, specifically GRP261x, GRP262x, GRP263x, GRP2650, and GRP2670 IP phones.

!

Note:

To ensure full compatibility with GDMS, the minimum firmware version required for remote access to Web UI is 1.0.13.21.

In this section, we will demonstrate how users can remotely access the web UI of a GRP2634 IP phone via GDMS.

Before proceeding, ensure that the GRP2634 IP phone is added under “**VoIP Device**” in your GDMS account and is running firmware version **1.0.13.21 or higher**.

VoIP Device									
Upgrade Firmware		Sync Device Local Configuration		More					
						All Types	All Models	Enter MAC/Device Name/IP	
								Filter	
☐	MAC Address	Device Name	Device Model	Firmware Version	Account Status	Site Name	Push Configuration	Last Config Time	Options
☐	C0:74:AD:...	GRP2634	GRP2634	1.0.13.21	1000	Default	Enabled	2025/04/02 16:54	

GDMS VoIP Device Page

To remotely access the phone’s web UI, hover over “**Additional Options**” and select “**Remote Access to Web UI**”.

Refresh List

RPS Management

+ Add Device

Import Device

Export Device

All Types

All Models

Enter MAC/Device Name/IP

Filter

are Version	Account Status	Site Name	Push Configuration	Last Config Time	Options
21	1000	Default	Enabled	2025/04/02 16:54	

Device Details

Operation Logs

Task History

Edit Device

Authorization Management

Transfer Device

Disabled Push Configuration

Sync Device Local Configuration


Remote Access to Web UI

Reboot Device


Factory Reset

Remote Access to Web UI via GDMS

A window will appear, informing you of temporary access (1 hour), and you will be redirected to the web UI.

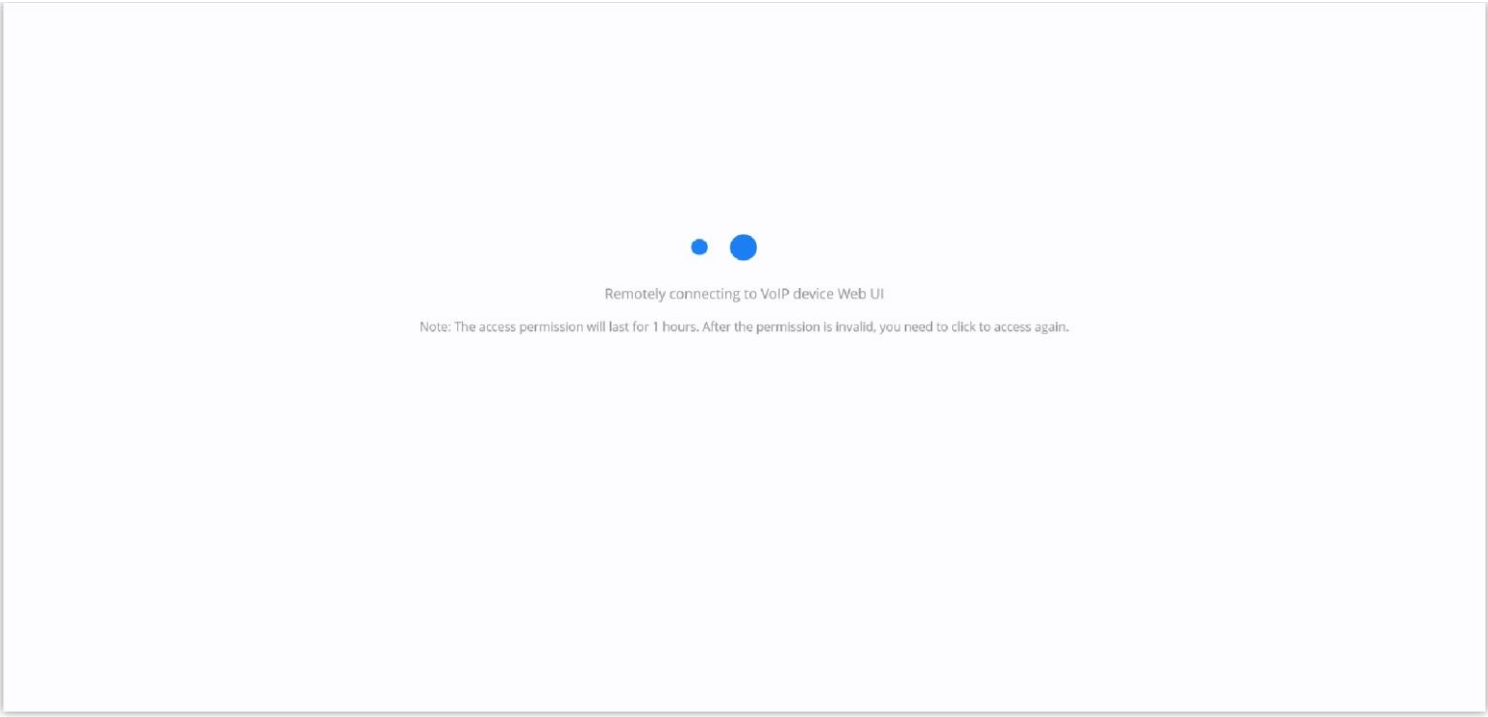

Remotely Connecting to the GRP Phone

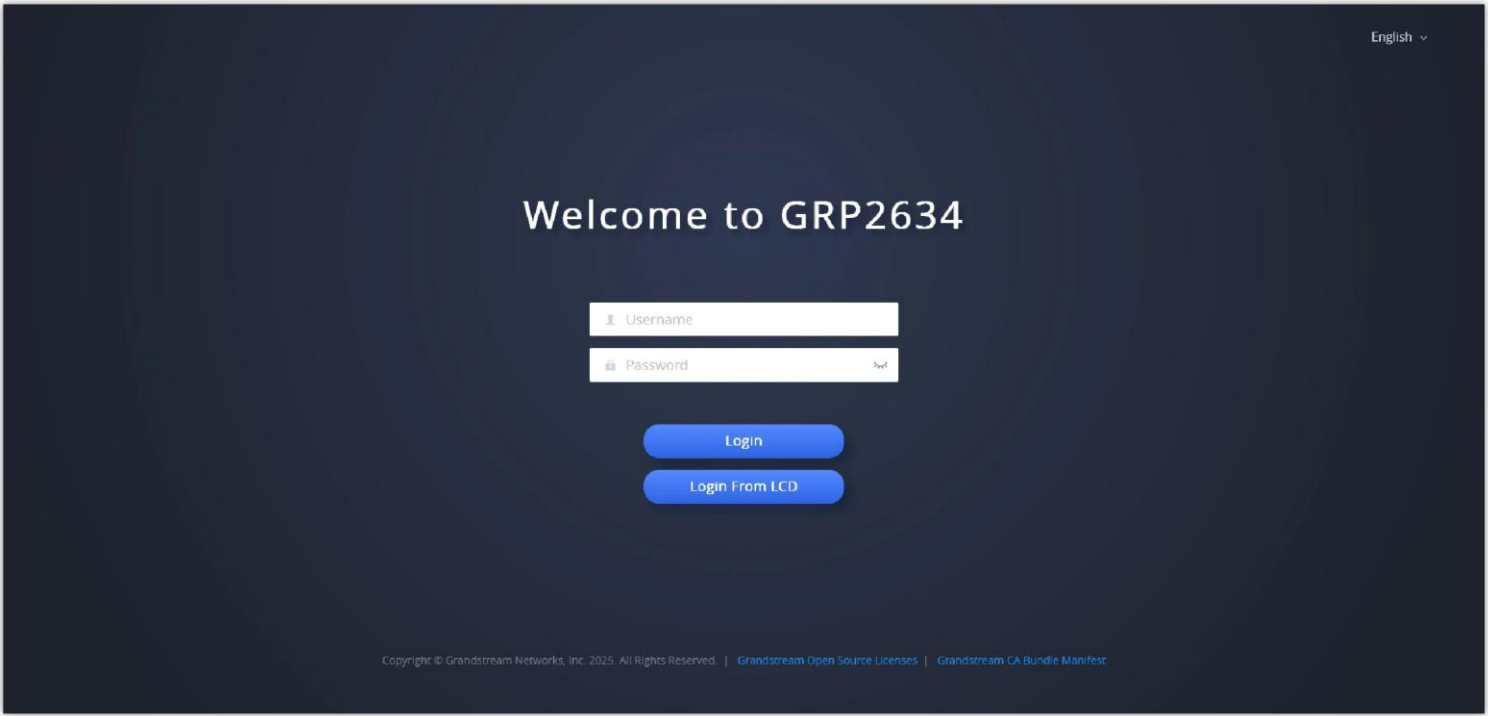

GRP2634 Web UI Login Page

View VoIP Device Operation Logs

Users can view all operation logs for a specific device on the GDMS platform.

- 1. On the Device List, select the menu button



following the specific device, and click on the "Operation Log" button.

- 2. Access to the Operation Log menu of the device, the menu includes the operation logs of device SIP account configuration, updating configuration parameters, device rebooting, device upgrading/downgrading, device factory reset, device diagnostics, etc.

Note:

Users could only view the device operation logs for the last 30 days.

Device List > Operation Logs (000B829A8F2C 00:0B:82:9A:8F:2C)

All Levels

All Operations

Q Enter Username

Filter

Username	Log Contents	Level	Operating Time	
Grandstream	Configure Account	High	2019/11/07 14:20	
Grandstream	Reboot Device (Immediate Task)	High	2019/11/07 14:20	
Grandstream	Ping/Traceroute	High	2019/11/07 14:01	
Grandstream	Ping/Traceroute	High	2019/11/07 13:59	
Grandstream	Configure Account	High	2019/11/07 13:59	
Grandstream	Configure Account	High	2019/11/07 13:57	
Grandstream	Configure Account	High	2019/11/07 13:56	
Grandstream	Configure Account	High	2019/11/07 13:55	
Grandstream	Configure Account	High	2019/11/07 13:52	
Grandstream	Configure Account	High	2019/11/07 13:50	

Total 224

<1234...23>

10/page

View VoIP Device Operation Logs

View VoIP Device Task History

Users could view all task histories in the sub-system for a specific device on the GDMS platform, including immediate tasks and timed tasks.

1. On the Device List, select the menu button



following the specific device, and click on the “Task History” button.

2. Access the Task management page, and search for all tasks of the specific device.

Task

Add Task

Delete

All Statuses

All Task Type

All Types

Q Enter Task Name/MAC

Filter

☐	Task Name	Task Type	Task Time	Creator	Status	Run Time	Options	
☐	—	Upgrade Firmware	Immediate (09/05/2022 10:16AM)	yxxuu1122	Timeout	—		
☐	—	Update Config: CFG	Immediate (29/04/2022 06:36AM)	yxxuu1122	Timeout	—		
☐	—	Update Config: Group	Immediate (29/04/2022 06:35AM)	yxxuu1122	Timeout	29/04/2022 06:36AM		
☐	—	Update Config: Model	Immediate (29/04/2022 06:31AM)	yxxuu1122	Timeout	29/04/2022 06:31AM		
☐	—	Update Config: Group	Immediate (29/04/2022 02:21AM)	yxxuu1122	Timeout	—		
☐	—	Update Config: Model	Immediate (29/04/2022 02:20AM)	yxxuu1122	Timeout	—		
☐	5454	Update Config: Model	27/04/2022 04:00PM ~ 29/04/2022 03:59PM	yxxuu11	Ongoing	—		
☐	111	Upgrade Firmware	24/04/2022 10:41AM ~ 25/04/2022 02:59AM	yxxuu1122	Timeout	—		
☐	—	Update Config: Model	Immediate (18/04/2022 02:19AM)	yxxuu1122	Timeout	—		
☐	重现bug	Reboot Device	30/12/2021 12:00AM ~ 31/12/2021 11:59PM	yxxuu	Timeout	—		

Total 1696

<1234...170>


10/page

View VoIP Device Task History

Firmware Upgrade

Users could upgrade firmware for a batch of devices to a specific firmware version.

1. In the device list, check multiple devices, and then click on the button **Upgrade Firmware** on the top of the Device page.

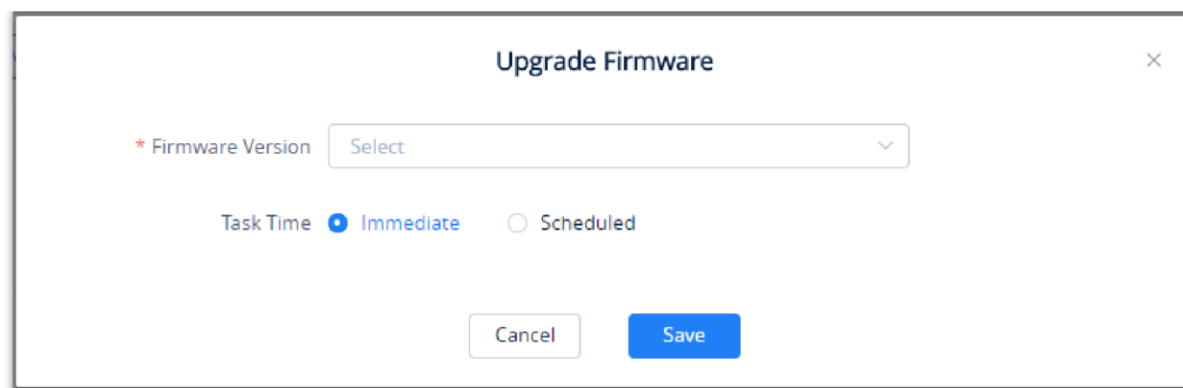

Upgrade Firmware

2. Users need to select the firmware version to upgrade to.
3. **Task Time:** Select when to start the firmware upgrade. Users can choose to upgrade immediately or to schedule the firmware upgrade for a specific time.
4. Click on the **Save** button to create the task. Users can check the status of the upgrade by navigating to the **Task Management** page.




- Users cannot batch upgrade different device models or models on different firmware.
- If the desired firmware is not available, users will need to contact their GDMS administrator.

Site Assignment

Users could edit the site of a batch of devices on the GDMS platform. The default site is “default”.

1. Select the desired devices and click on the **Site Assignment** button.

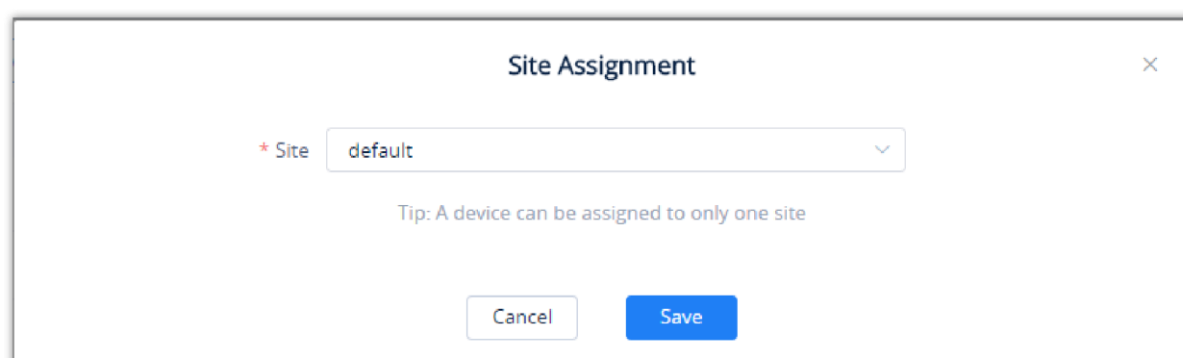

Site Assignment


2. Select the site to assign the selected devices.
3. Click on the **Save** button, and all selected devices will be transferred to the selected site.

 Each device can only be allocated to one single site.

Move Device

Users can move devices to other organizations.

1. Select the desired devices and click on **More → Move Device**.

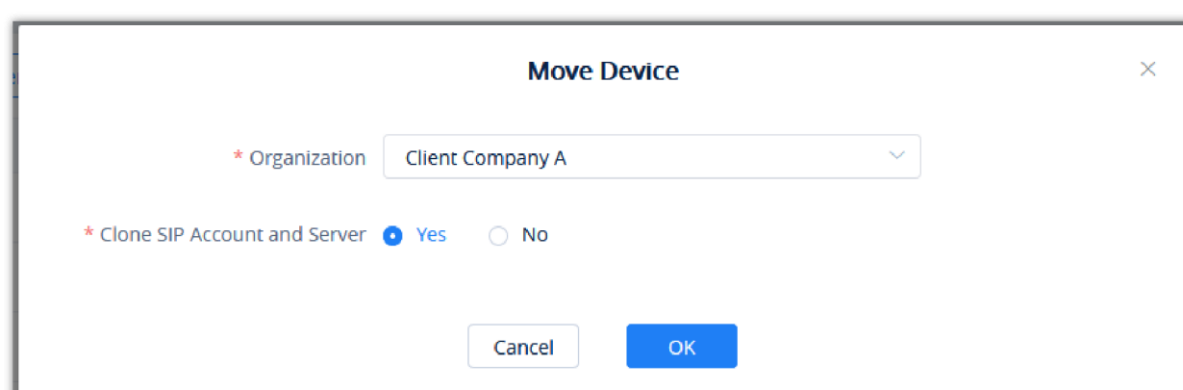


Move Device

- 2. Select the target organization where to transfer the device.
- 3. The user needs to select whether to clone the SIP account and server which have been configured in the devices. If the user selects “No”, only the device data are transferred to the new organization, and the configured SIP accounts become empty after moving the devices.

Assign RPS

To assign an RPS to the devices, please click on **RPS Management** and pick an RPS from the list, then select the devices to configure with the selected RPS.

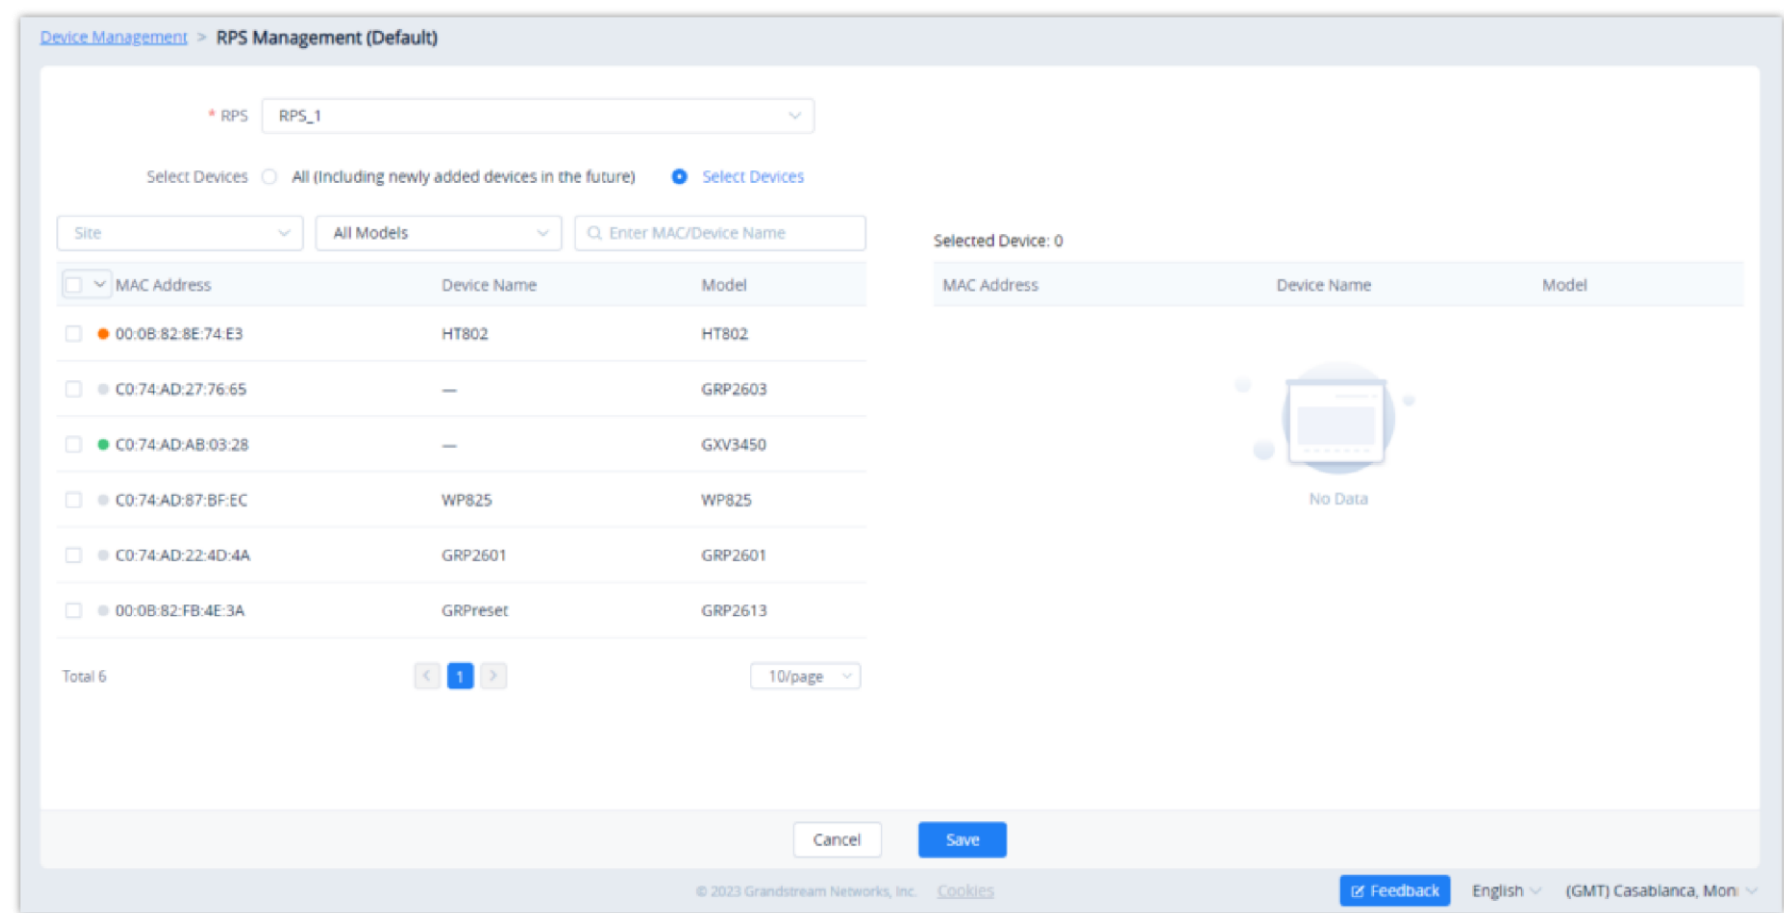


Assign RPS

If no RPS has been created, please refer to the [RPS Management](#) section.

Reboot VoIP Device

Users could reboot one device or a batch of devices on the GDMS platform.

- 1. Select the desired devices and click on **More → Reboot Device**.

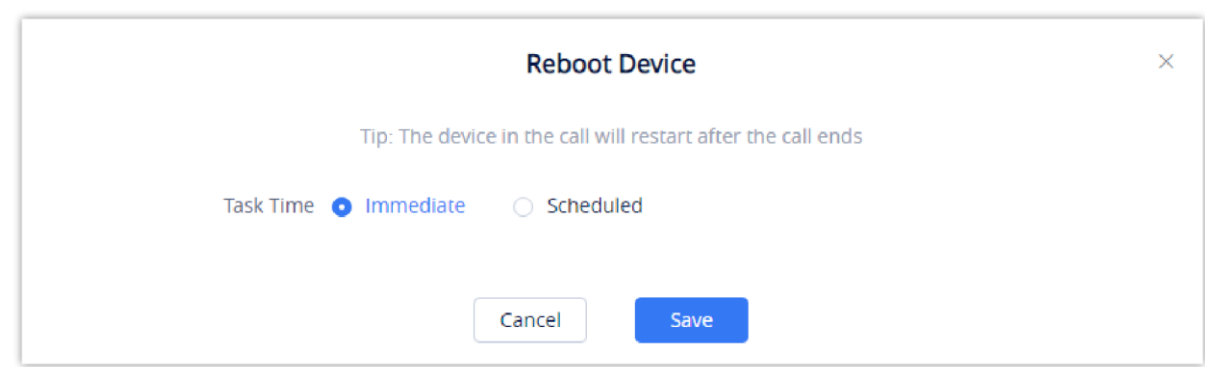

Reboot Device

- 2. **Task Time**: Select when to start the device reboot. Users can choose to reboot immediately or schedule the reboot for a specific time.
- 3. Click on the **Save** button to create the task. Users can check the status of the reboot by navigating to the **Task Management** page.

Factory Reset

Users could factory reset one device or a batch of devices on the GDMS platform.

- 1. Select the desired devices and click on **More → Factory Reset**.

Factory Reset

Tip: Factory reset will clear all configurations

Task Time ☒ Immediate ☐ Scheduled

Cancel

Save

Factory Reset

2. **Task Time:** Select when to factory reset the device. Users can choose to factory reset the device immediately or to schedule the factory reset for a specific time.
3. Click on the **Save** button to create the task. Users can check the status of the reboot by navigating to the **Task Management** page.

!

Factory resetting a device will erase all existing settings on it such as accounts, call history, contacts, etc. The device will synchronize with GDMS the next time it goes online after the factory reset.

Delete VoIP Device

Users could delete one device or a batch of devices on the GDMS platform.

1. Select the desired devices and click on **More → Delete**.

Device List

Add Device

Import Device

Export Device

Upgrade Firmware

Site Assignment

More

Refresh List

All Models

Q Enter MAC/Device Name/IP

Filter

☒	MAC Address		Model	Firmware Version	Public IP	Private IP	Account Status	Site Name	Last Config Time	Options
☐	00:0B:82:9A:8F:2C		XV3370	20.19.8.1	192.168.126.215	192.168.126.215	Abnormal	default	2019/11/07 14:21	👤 ⚙️ 📦 😊
☒	C0:74:AD:01:B4:80		RP2614	—	—	—	Abnormal	default	Provisioning	👤 ⚙️ 📦 😊
☒	C0:74:AD:05:C6:6C		GRP2614	—	—	—	No Account	default	Provisioning	👤 ⚙️ 📦 😊
☒	C0:74:AD:05:D4:82		GRP2614	—	—	—	No Account	default	Provisioning	👤 ⚙️ 📦 😊
☒	C0:74:AD:01:B5:00		GRP2614	—	—	—	No Account	default	Provisioning	👤 ⚙️ 📦 😊
☐	C0:74:AD:05:C4:C0		GRP2614	—	—	—	No Account	default	Provisioning	👤 ⚙️ 📦 😊
☐	00:0B:82:E5:8C:CD	00:0B:82:E5:8C:...	DP750	0.1.11.2	192.168.200.27	192.168.200.27	Abnormal	o-oo	2019/11/01 09:09	👤 ⚙️ 📦 😊
☐	00:0B:82:FA:E5:4F		GXP2140	—	—	—	No Account	default	Not configured	👤 ⚙️ 📦 😊
☐	00:0B:82:FA:E5:50		GXP2140	—	—	—	Normal	default	Not configured	👤 ⚙️ 📦 😊
☐	00:0B:82:FA:E5:52		GXP2140	—	—	—	No Account	default	Not configured	👤 ⚙️ 📦 😊

Total 260

<

1

2

3

4

...

26

>

10/page

Delete Device

2. Click on the **OK** button on the pop-up window to confirm deleting the devices, and the selected devices will be deleted immediately from the GDMS platform. The scheduled tasks involving the deleted devices will be canceled too.

Delete the 2 selected device(s)?

The device cannot be managed after deleting it.

Cancel

OK

Delete Device Prompt

Export VoIP Device

To export the entire device list, click on the

Export Device

 button in the top-right corner of the device list page. The exported list includes all device and account information.

Manage Device via GDMS Support

If the user’s device is abnormal and wants Grandstream Support to troubleshoot the problem, the user can enable to manage the device through GDMS Support.

After the authorization is assigned, Grandstream Support can diagnose the device and assign parameters to the device.

- 1. On the VoIP Device list, click the “More” button



following the device and select to access the “Authorization Management” interface, as the screenshot shows below:

✕

Authorize GDMS Support to manage this device (C0:74:AD [redacted])?

If you need authorization, please configure the authorization duration. After authorization, the support can check and configure the device.

Authorized Duration (minutes) ?

1-9999 numbers

☒ Grant SSH Access

Please provide the device's web portal login info, or provide the info to technical support.

Username

Password

Cancel Authorization

Authorization Management

- 2. Enter the authorization duration, which can be set between 1 to 9999 minutes, according to the time required for problem troubleshooting.
- 3. Tick the “Grant SSH Access” box to grant access using SSH, then enter the username and password of the VoIP endpoint device SSH information.
- 4. Once the user clicks the “Authorization” button, Grandstream Support can only manage the device within the authorization period. Once the authorization period ends, Grandstream Support cannot manage the device.

Stop Authorizing Manually

- 1. When the problem is confirmed, the user can end authorization manually. The user can click the “More” button



following the device, and select to access the “Authorization Management” interface, as the screenshot shows below:

✕

Authorization Management

You have authorized GDMS Support to manage this device.

Authorization Time 2021/01/18 02:54-2021/01/18 03:54

Stop Authorizing

Stop Authorizing Manually

- 2. The user can click the “Stop Authorizing” button to stop managing the device immediately, and then Grandstream Support cannot manage the device.

Configure Parameter For Device


GDMS platform administrator can configure the parameters of UCM RemoteConnect for the device remotely. Once the device has been configured following the methods below, the device can use the UCM RemoteConnect functions.

Method 1:

- 1. GDMS platform administrator can go to **VoIP Account → SIP Account** interface, select the SIP accounts that will be assigned to the device, and click on the edit button



to access the account editing interface:

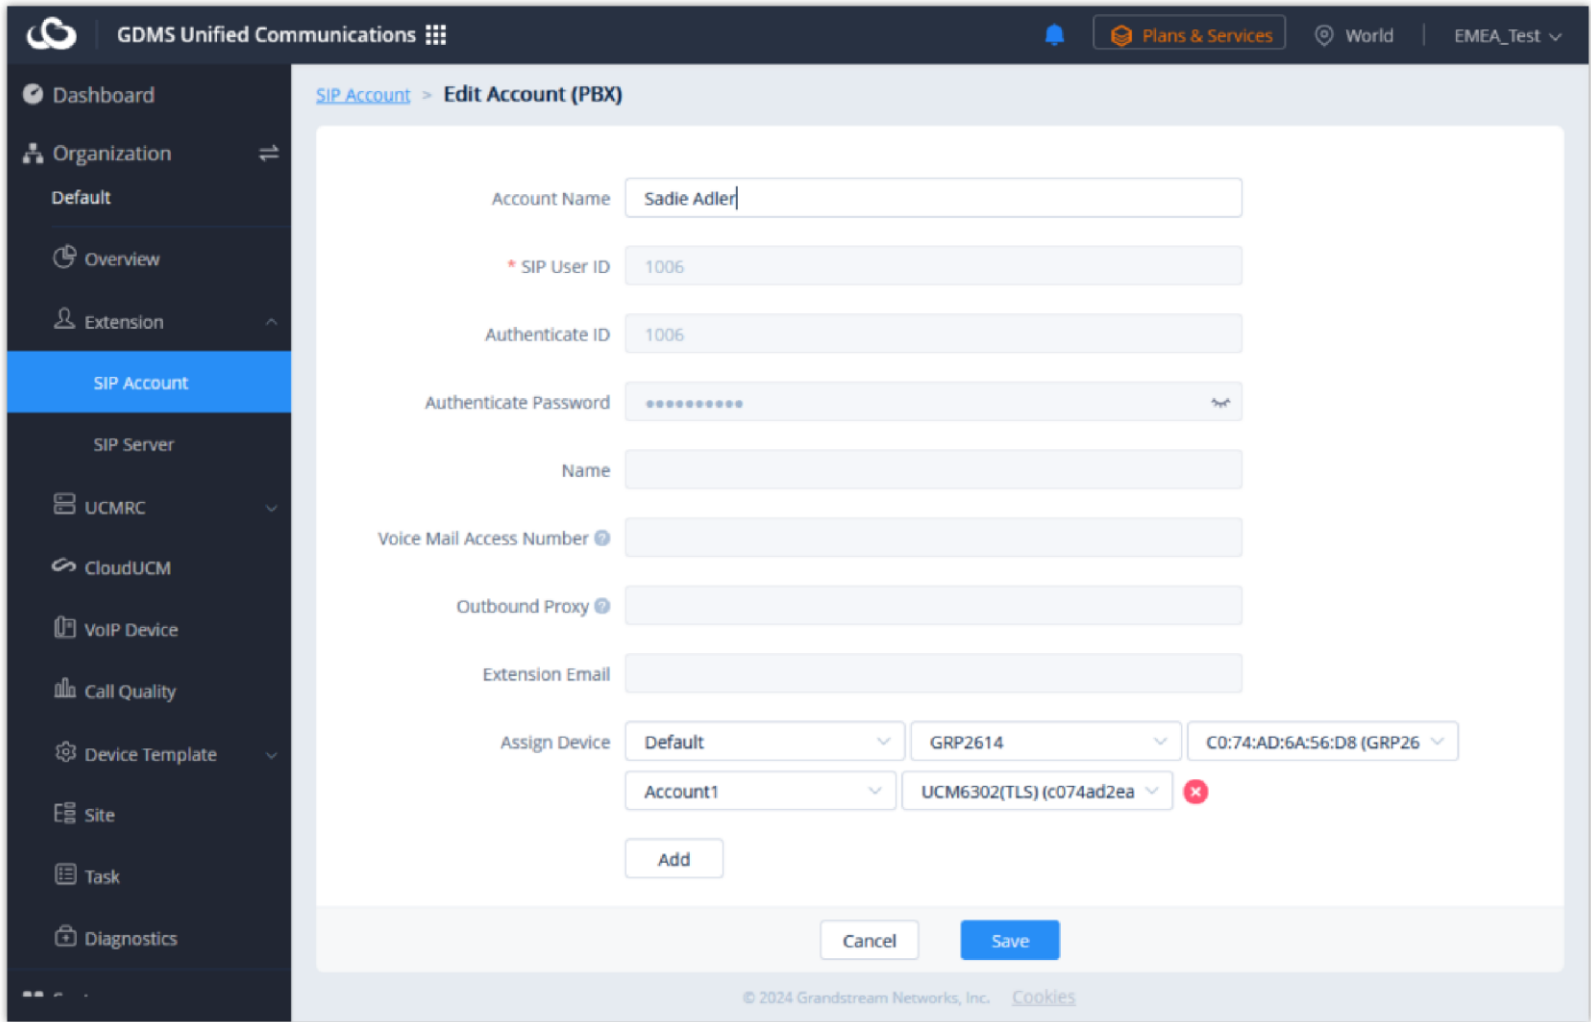


Edit Account


- 2. Click the **Add Server** option and select the external network server address reported by the UCM RemoteConnect.
- 3. Assign the SIP server to the device and enter the device MAC address and Account index, then select the SIP server of the UCM RemoteConnect.
- 4. Click to save and apply the changes for UCM RemoteConnect for the device.

Method 2:

Users can select multiple SIP accounts, click the “Modify SIP Server” option on the top of the interface, and then select the server address of UCM RemoteConnect to modify the SIP server address (internal network) to the server address of UCM RemoteConnect for a batch of devices.

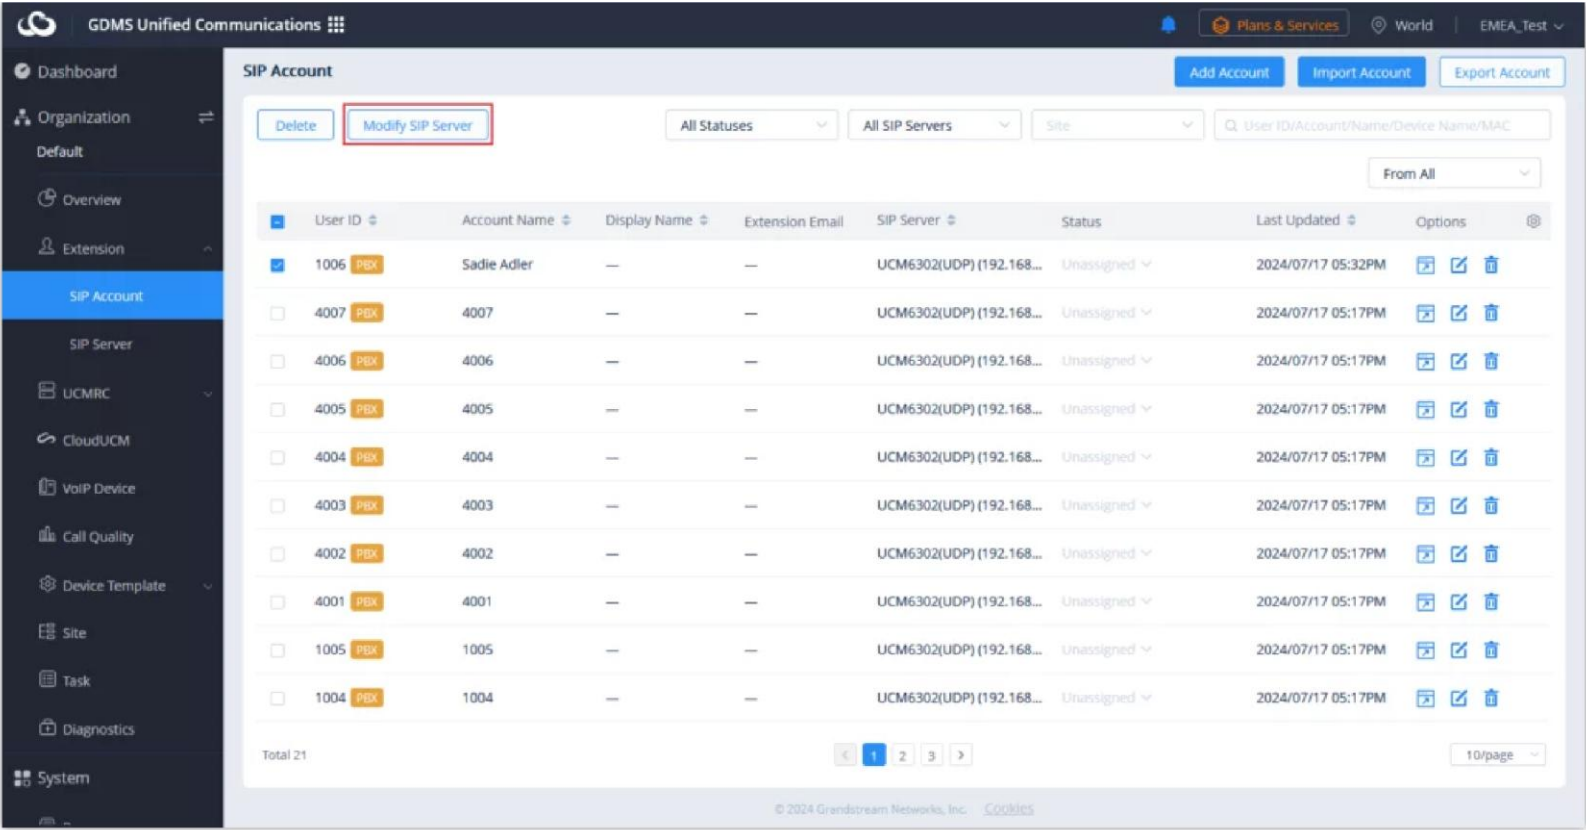

Modify a SIP Server Address

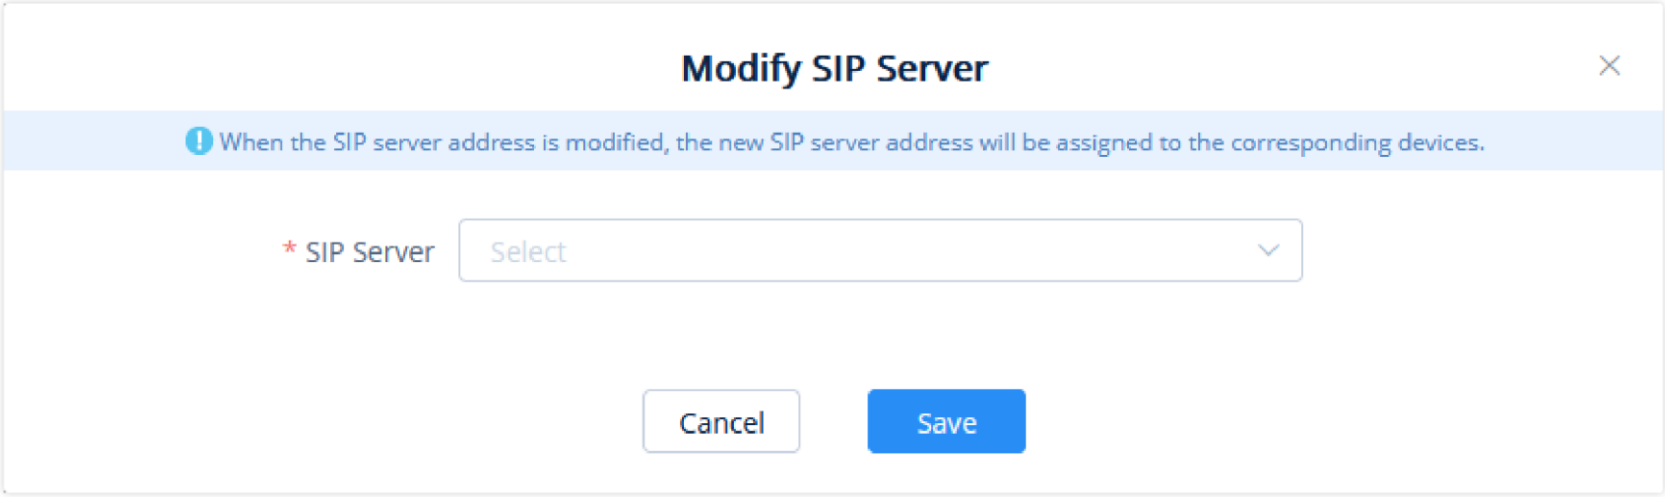

Choose SIP Server




When the user configures the server address of UCM RemoteConnect for the device, the following settings will be assigned to the device automatically to ensure the UCM RemoteConnect service can be used successfully:

- SIP Protocol – TLS
- STUN server setting will be changed to the TURN server address of UCM RemoteConnect.

When the UCM RemoteConnect account is deleted from the device, the STUN server setting will be removed automatically from the device.

Open Subscription for DP Base Stations

The user can open the DP subscription on DP752 and DP750 base stations remotely from the GDMS user interface. In the VoIP list, click on  button of the DP base station which you want to open the subscription for then select “Open Subscription” as shown in the figure below.

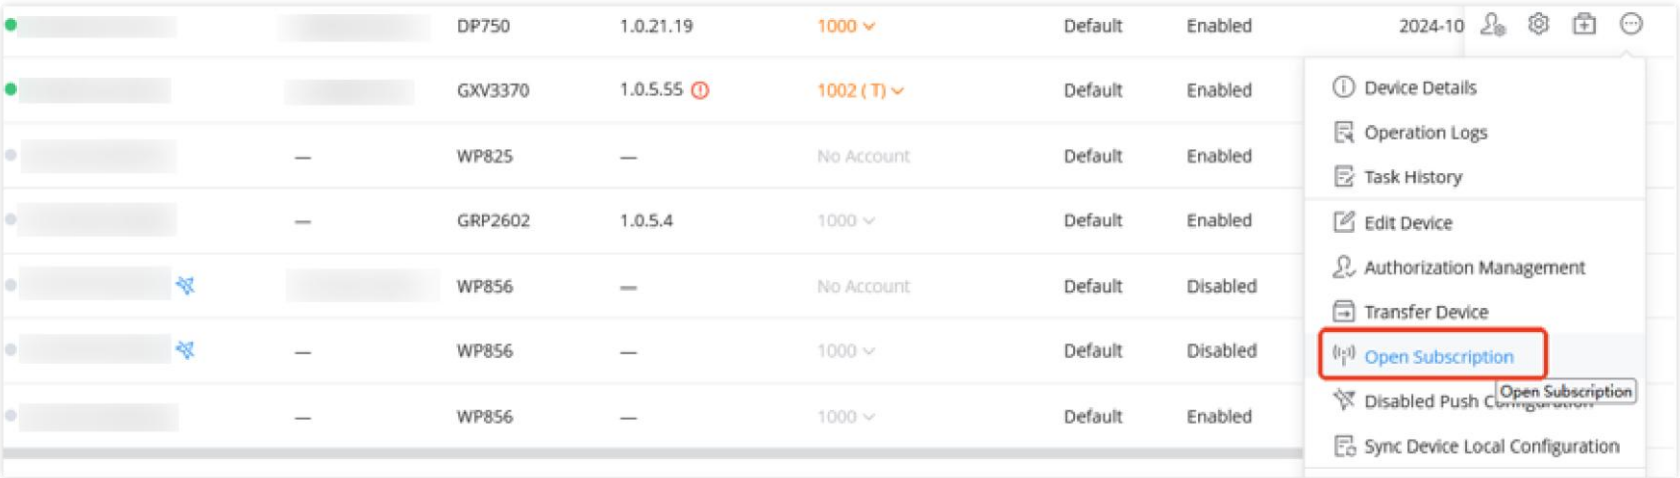

Open Subscription


 Note

Call Quality

Statistics Overview

The interface below displays the call quality reported by the device on the GDMS platform.

Prerequisites: The device must use the SIP account in the IPPBX server which has the UCM RemoteConnect service so that the device can report the call quality to the GDMS platform. This function is only supported for certain UCM RemoteConnect plans. To check which plans support this feature please refer to the RemoteConnect website: <https://ucmrc.gdms.cloud/home>

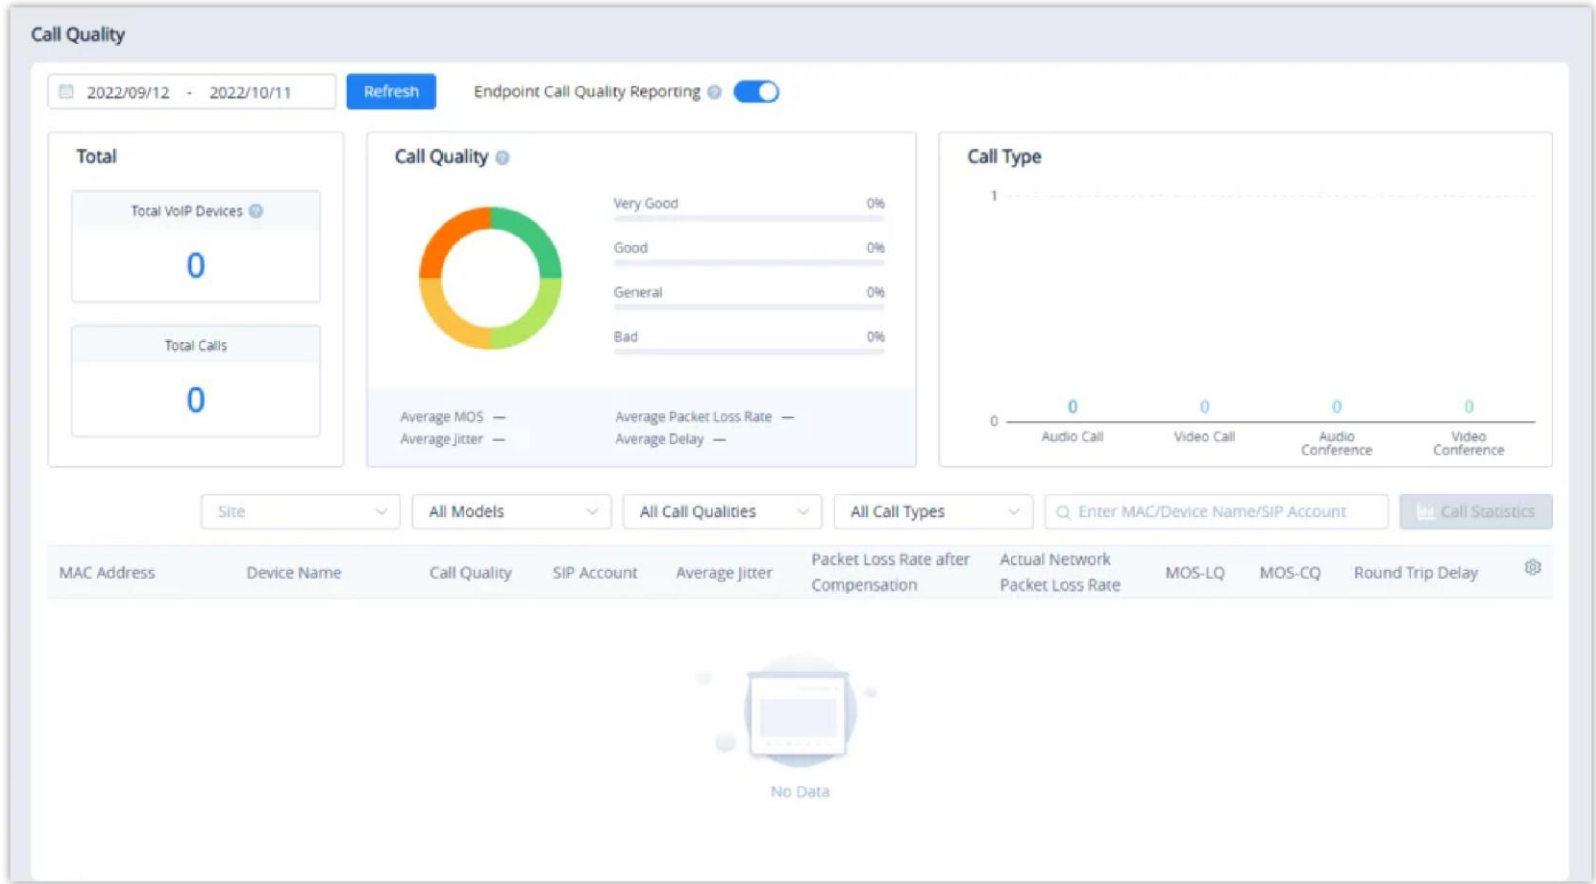

Statistics Overview

Module	Description
Total VoIP Devices	Display the number of VoIP devices reported by the current organization (only display the statistics report for the current filter time)
Total Calls	Display the number of calls reported by the current organization (only display the statistics report for the current filter time)
Call Quality	Display the call quality ratio and average values for the reported call history by the current organization (only display the statistics report for the current filter time)
Call Type	Display the call types for the reported call history by the current organization (only display the statistics report for the current filter time)

Statistics Overview

Note

- This feature requires Business or Enterprise plans to be used. To use the call quality analysis feature a supported phone model should be added to the GDMS platform. If the phone was provisioned using an extension that was synchronized on the GDMS, the phone will report information regarding the quality of the call using tools that calculate latency, jitter, and packet loss. No audio will be collected.
- Supported models: HT8XX, GXV33XX, and GRP260X series.

Call Quality Record

GDMS platform displays all reported call quality records on the **Call Quality** interface.

Please see the screenshot below:

SiteAll ModelsAll Call QualitiesAll Call TypesQ Enter MAC/Device Name/SIP AccountCall Statistics								
MAC Address	Device Name	Call Quality	SIP Account	Average Jitter	Packet Loss Rate	MOS-LQ	MOS-CQ	Round Trip Delay
C0:74:AD:22:4D:32	rrrrrr	Bad	4002	27.00ms	0.00%	4.4	4.4	100.00ms
Total 1				< 1 >				10/page

Call Quality Record


- 1. GDMS platform supports filtering call quality records by date.

2020/11/14 - 2020/11/20


Refresh

Filter by Date

- 2. GDMS platform supports search call quality records by site, device model, call quality, and call type.
- 3. GDMS platform supports to search of call quality records by device MAC address, device name, and SIP Account.
- 4. Click the **Call Statistics** button



to view the statistical report of the filtered call quality records.

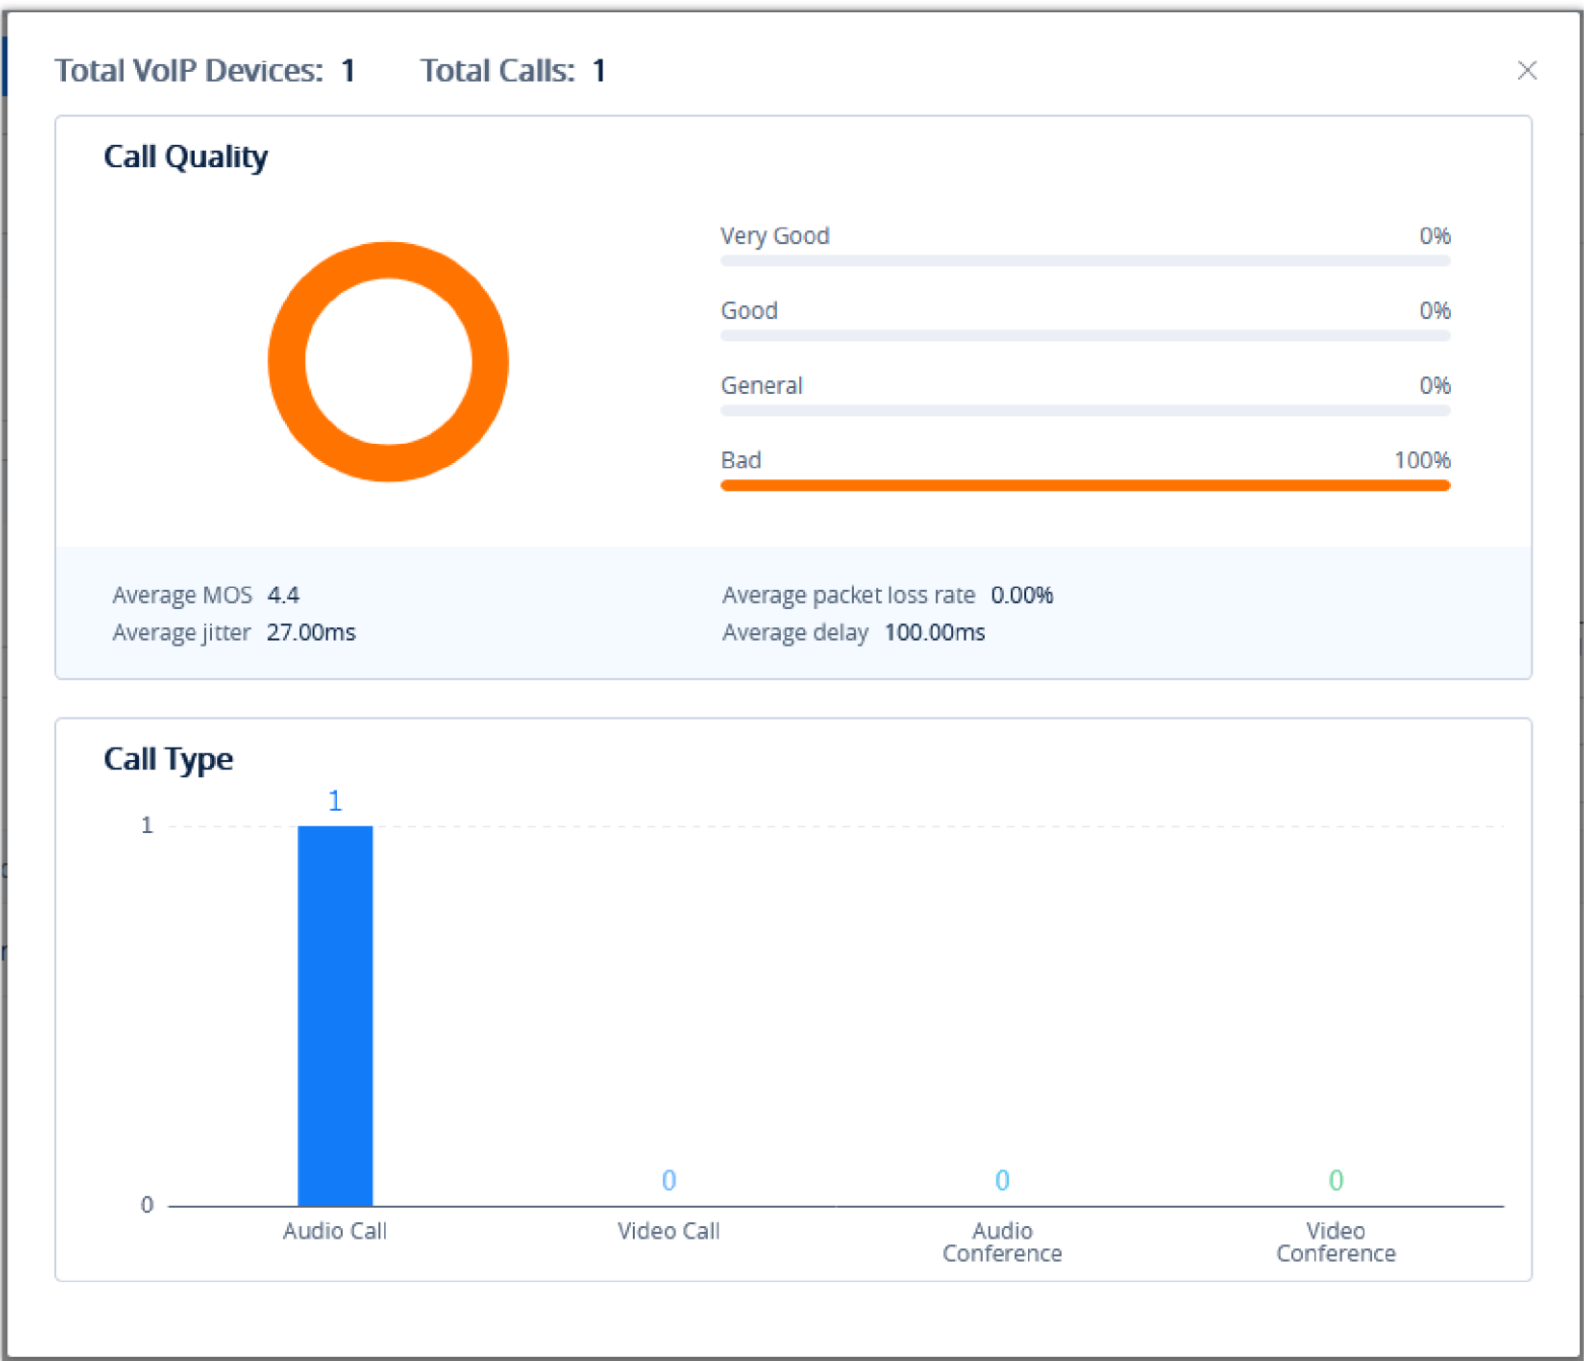


Call Quality Record Report

Call Quality Reporting

Users can enable/disable reporting call quality on the GDMS platform. If the user does not want to view the call quality report, the user can disable this function on the GDMS platform.

On the **Call Quality** interface, the user can click **Phone reports the call quality** button

Phone reports the call quality ? ☒ to disable reporting call quality. When this function is disabled, the devices under the current organization will no longer report the call quality to the GDMS platform.

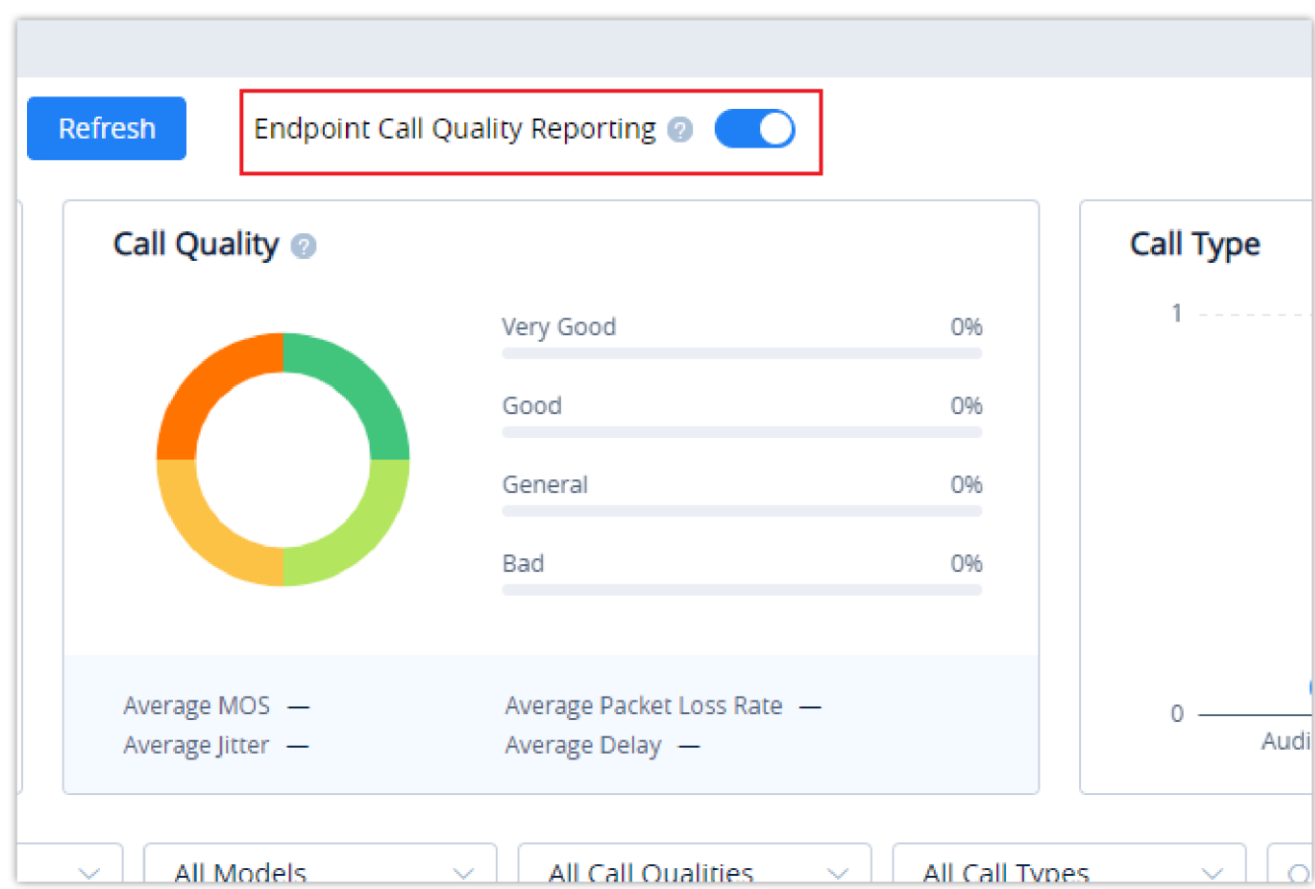

EnableDisable Call Quality Reporting

Device Template

The **Device Template** page allows users to create templates that can be used to provision devices of the same model or in the same group. Additionally, users can upload configuration files for individual devices and manage them individually.

! Users can only manage the devices in the current organization of the current system.

By Model


Users could customize the configuration template and classify the templates by device model and site. Users could also configure a batch of devices on the GDMS platform, which means users could create a configuration template for all the same models of devices or create multiple templates for different sites.

Automatic Configuration Push

When a device is added to GDMS for the first time, it will automatically obtain and use the configuration template for its model.

Manual Configuration Push

To manually push the configuration to specific device models, click on the  button of the desired models.

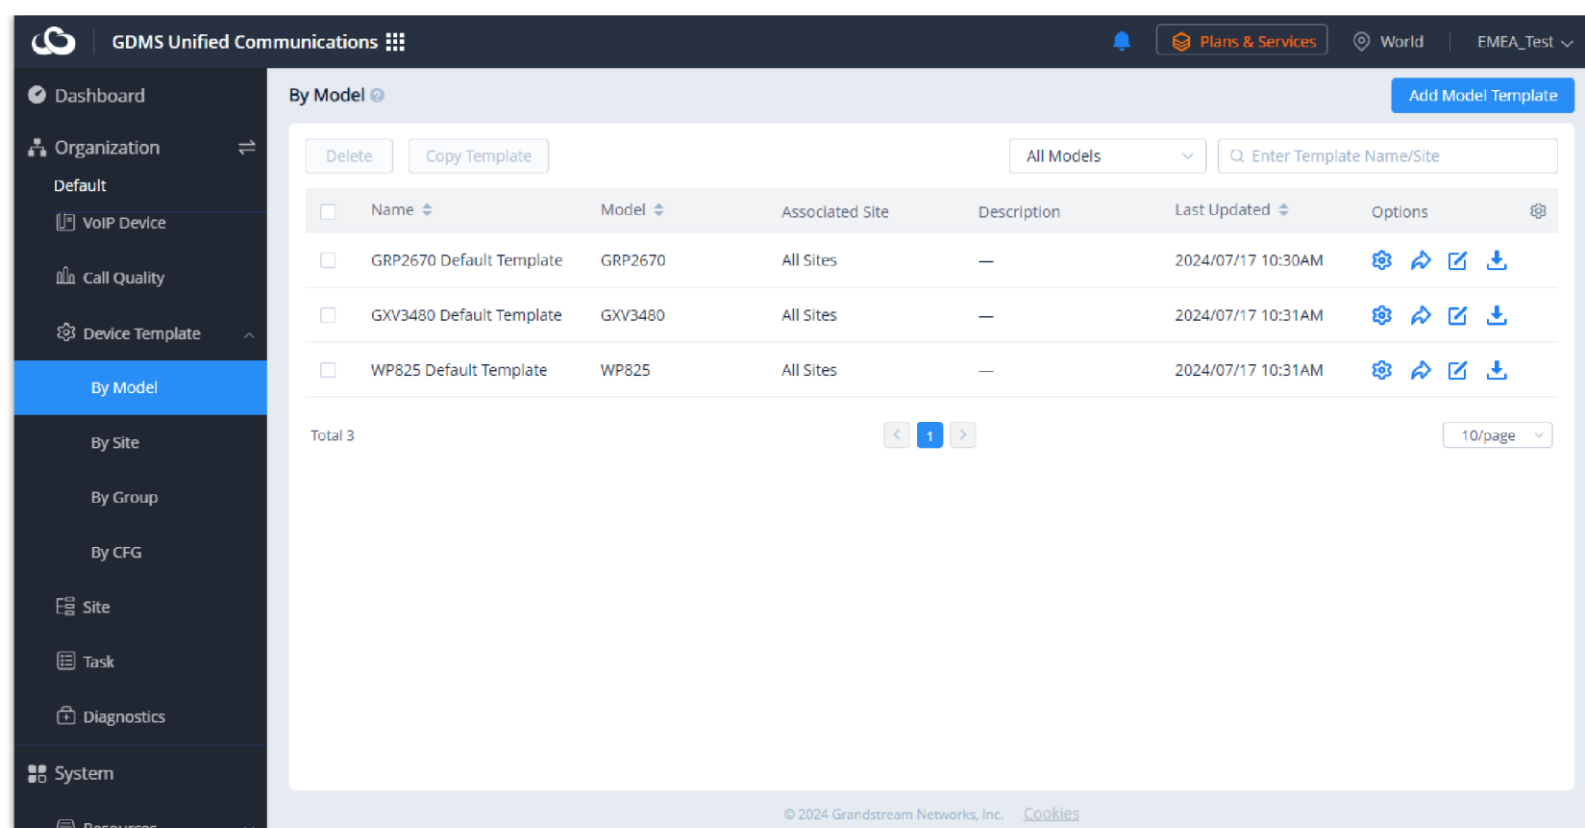


Manual Configuration Push

- ✓ If a device's setting has not been modified in the Device Management → Device → Set Parameters page, GDMS will automatically update the device with the template settings created in the Device Configuration page.

Example:

For GXV3370 devices, all sites are using the same configuration template, and all the devices under site A – D will acquire the same configuration template – GXV3370 Config Template.xml.

For DP720 devices, different sites have different configuration templates. The DP720 in site A will acquire the DP720 configuration file – Config Template -1.xml; the DP720 in site B will acquire the DP720 configuration file – Config Template -2.xml.

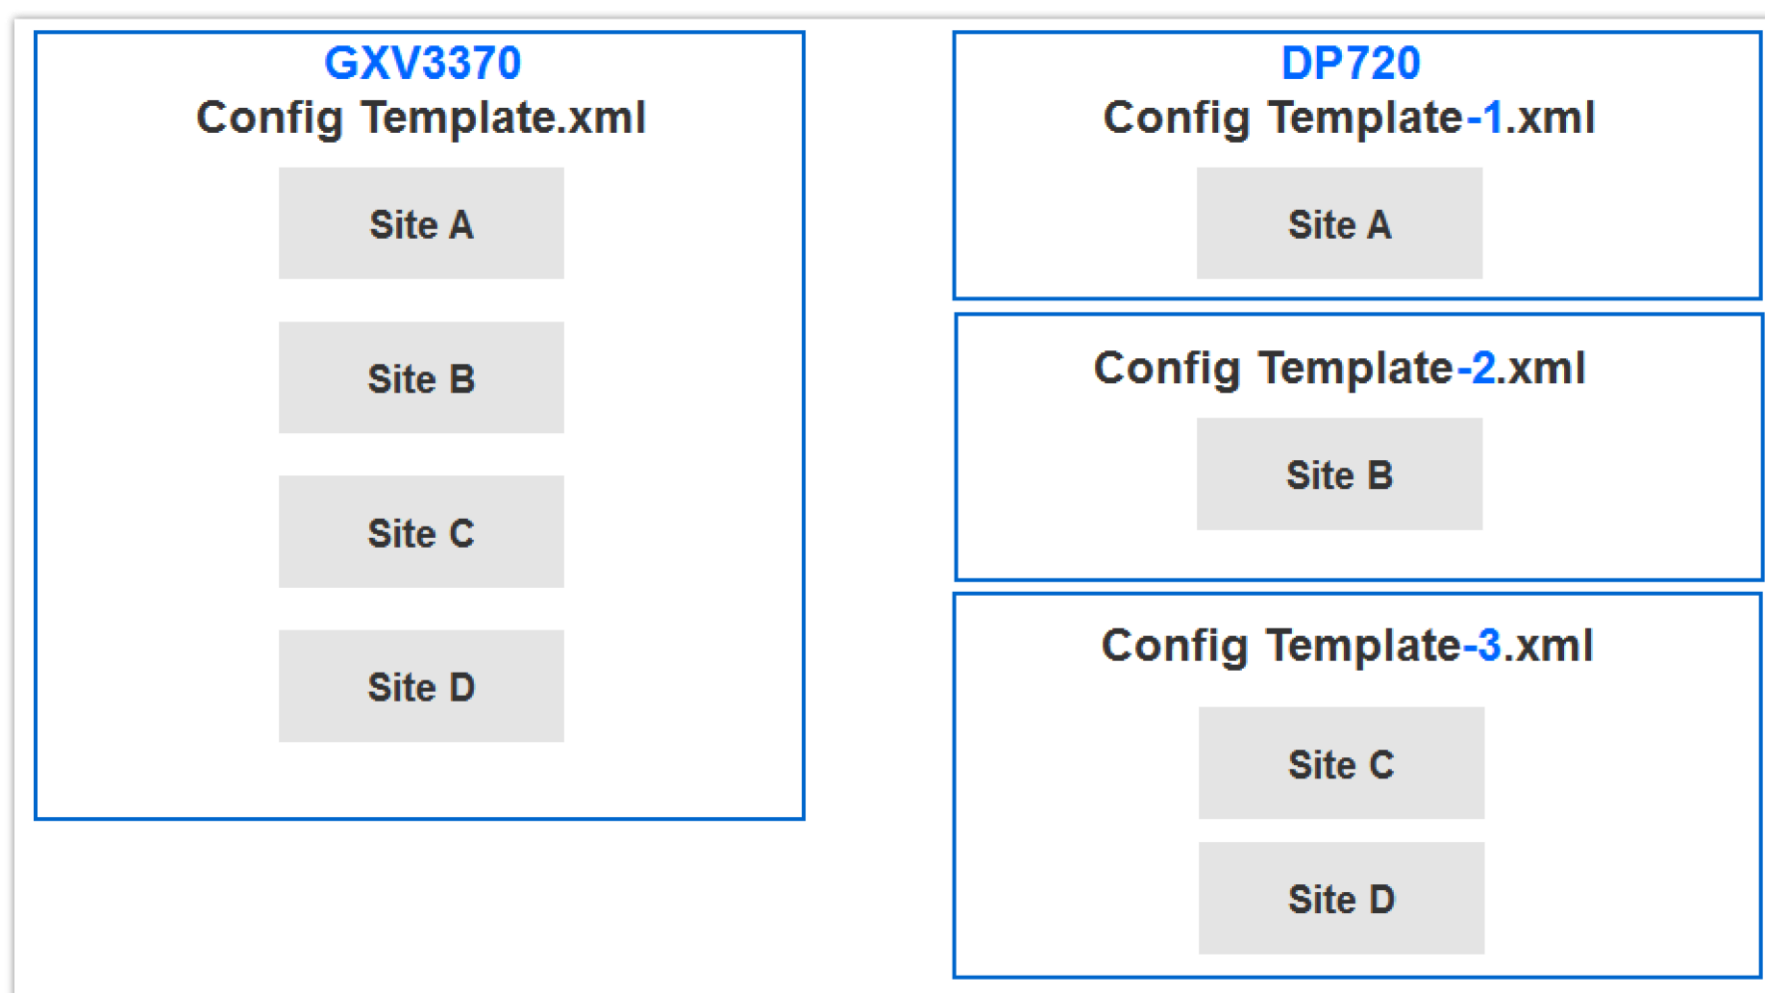

Example GXV3370

Add Template

To add a configuration template for a specific device model, click on the **Add Template** button on the **By Model** page and enter the following information:

Add Model Template

Name

GXV

Model

GXV3380

Auto Provision to Devices in

All Sites

Select Site

None

This template is automatically pushed only when the device under the site is connecting to GDMS for the first time.

Remember current selection

CFG File

Upload

Description

Cancel

Save

Add Template

Name	Enter the name of the template. This name must be unique and has a maximum character limit of 64.
Model	Select the device model of the template. The following models are supported: DP755 DP750 DP752 GDS3710 GAC2570 GDS3702 GDS3705 GDS3710 GDS3712 GHP610 GHP611 GHP620 GHP621 GHP630 GHP630W GHP631 GHP631W GRP2601 GRP2602 GRP2603 GRP2604 GRP2612 GRP2613 GRP2613W GRP2614 GRP2615 GRP2616 GRP2624 GRP2634 GRP2636 GRP2650 GRP2670 GSC3506 GSC3510

	● GSC3516 ● GSC3570 ● GSC3574 ● GSC3575 ● GSC3610 ● GSC3615 ● GSC3620 ● GVC3210 ● GVC3220 ● GXP2130 ● GXP2135 ● GXP2140 ● GXP2160 ● GXP2170 ● GXV3350 ● GXV3370 ● GXV3380 ● GXV3450 ● GXV3470 ● GXV3480 ● GXW4216V2 ● GXW4224V2 ● GXW4232V2 ● GXW4248V2 ● HT801 ● HT801V2 ● HT802 ● HT802V2 ● HT812 ● HT812V2 ● HT813 ● HT814 ● HT814V2 ● HT818 ● HT818V2 ● HT841 ● HT881 ● WP810 ● WP816 ● WP820 ● WP822 ● WP825 ● WP826 ● CloudUCM
Select Site	Select the site for which the template will be used. ● All Sites: All devices in all sites will use this template. ● Select Site: All devices in the selected sites will use this template. Multiple sites can be selected. ● None: GDMS platform will not allocate the template to any device. The user could allocate the template to the device manually.
Description	Users could input the descriptions of the template and the purpose.

Once complete, users will be redirected to the **Set Parameters** page to modify the device settings of the template.



- For the new associated device, when the device first time connects to the GDMS platform, it will acquire the configuration template according to the device model and site automatically. Users do not need to push the configuration template manually.
- Devices already on GDMS will not automatically obtain the settings from newly added configuration templates. Users will need to update these devices manually.

❗ If the GDMS platform has the model configuration template for the current device, and the user does not modify the configuration parameters from the Device Management → Device → Set Parameters menu, the GDMS platform will push the default model configuration template to the device when the device is online. Otherwise, if the user updates the device configuration on the “Set Parameters” menu on the GDMS platform and pushes it to the device, the device will use this configuration as the default configuration.


Set Parameters

Users can configure model-specific settings when editing model templates.

1. To configure these model-specific settings, click on the



of the desired template.

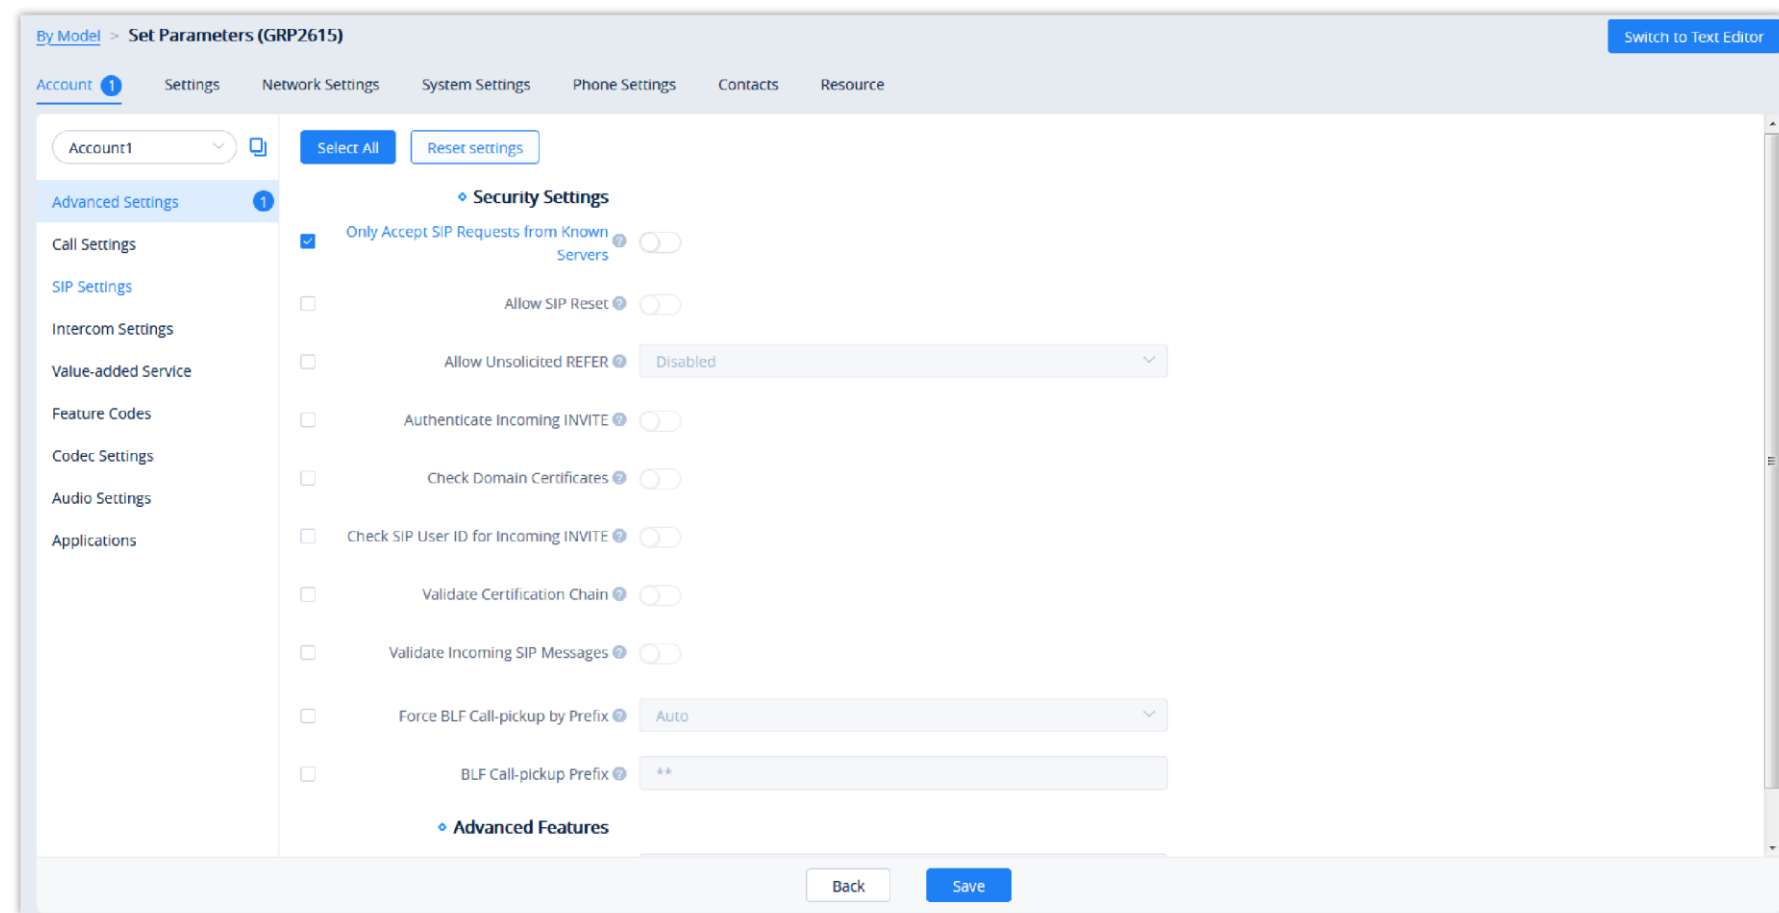


Set Parameters

2. Clicking on the **Select All** button will select every option on the current page. Clicking on it again will deselect all the options.
3. Clicking on the **Reset Settings** button will restore all settings on the current page to default values.
4. Clicking on the button



following the account, users can copy and paste the current account configuration to other accounts.


5. When users try to configure the device wallpaper or screensaver image, users can select a picture from the resources list, or upload the local picture to GDMS and configure it to the device.

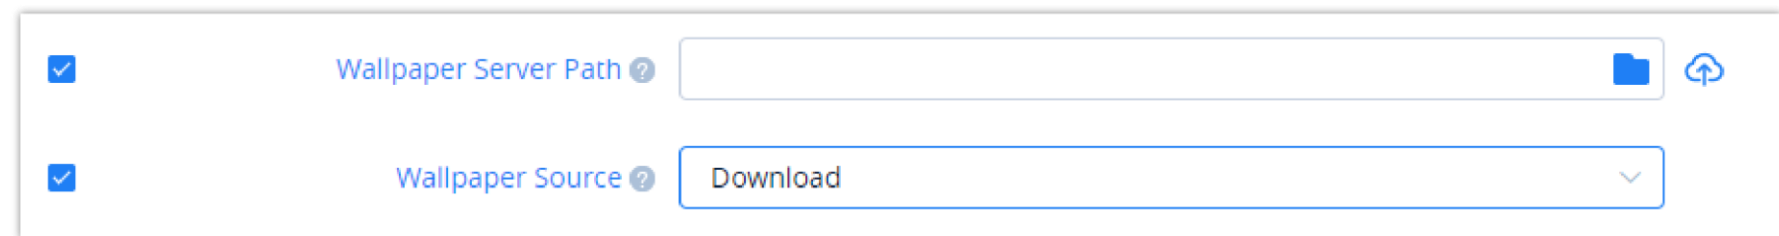

Ringtone Configuration

6. Modify the desired settings on the page or click on the **Switch to Text Editor** to configure device settings via text editing (e.g. p-values). The key can be either a P-value or an alias.
7. After setting the parameters, the user can click the “Save” button to save the changes. The user can select to apply the template configuration to all the same model devices on the corresponding site. The user can click the option “Provision

to Selected Devices” to select the devices to which the user wants to push the parameters. The user can also click the button “Apply All” to push the parameters to all devices.

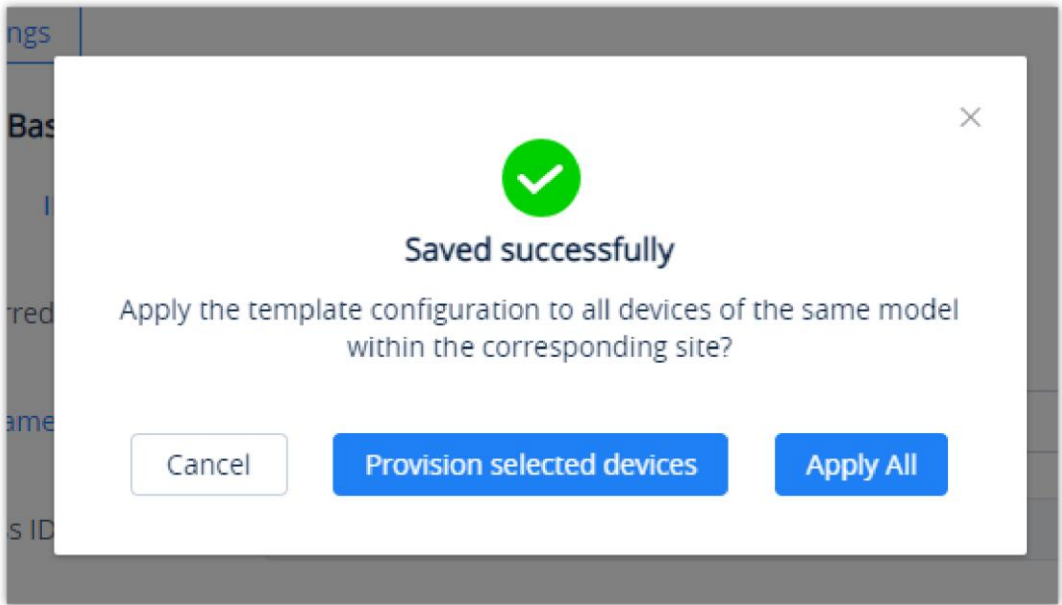

Saved Parameters Successfully

- The available settings for each model template are different. For more details on acceptable configuration values, please refer to the user guide for each device model.
- When the user adds a new model configuration template in the GDMS platform, the GDMS platform will not push the template to the existing devices in the GDMS platform, and the GDMS platform will only push the newly added template automatically to the new associated devices in the system.
- When the settings of a template are modified, the changes will not be automatically applied to related devices. Users will need to manually push the configuration to devices.
- For the newly added devices, the devices will acquire the updated configuration template automatically.
- If a scheduled task involves a modified template, the task will use the template settings at the time of scheduling, not the newly modified settings.
- Users can use the Search function to find the needed parameter.


Configure Resource Files

Users can configure custom ringtones and language for devices (Supported models: GXP/DP series).

- 1. To configure these model-specific settings, click on the button



of the desired template to go to the **Parameters Configuration → Resource Configuration** page, as shown in the figure below:

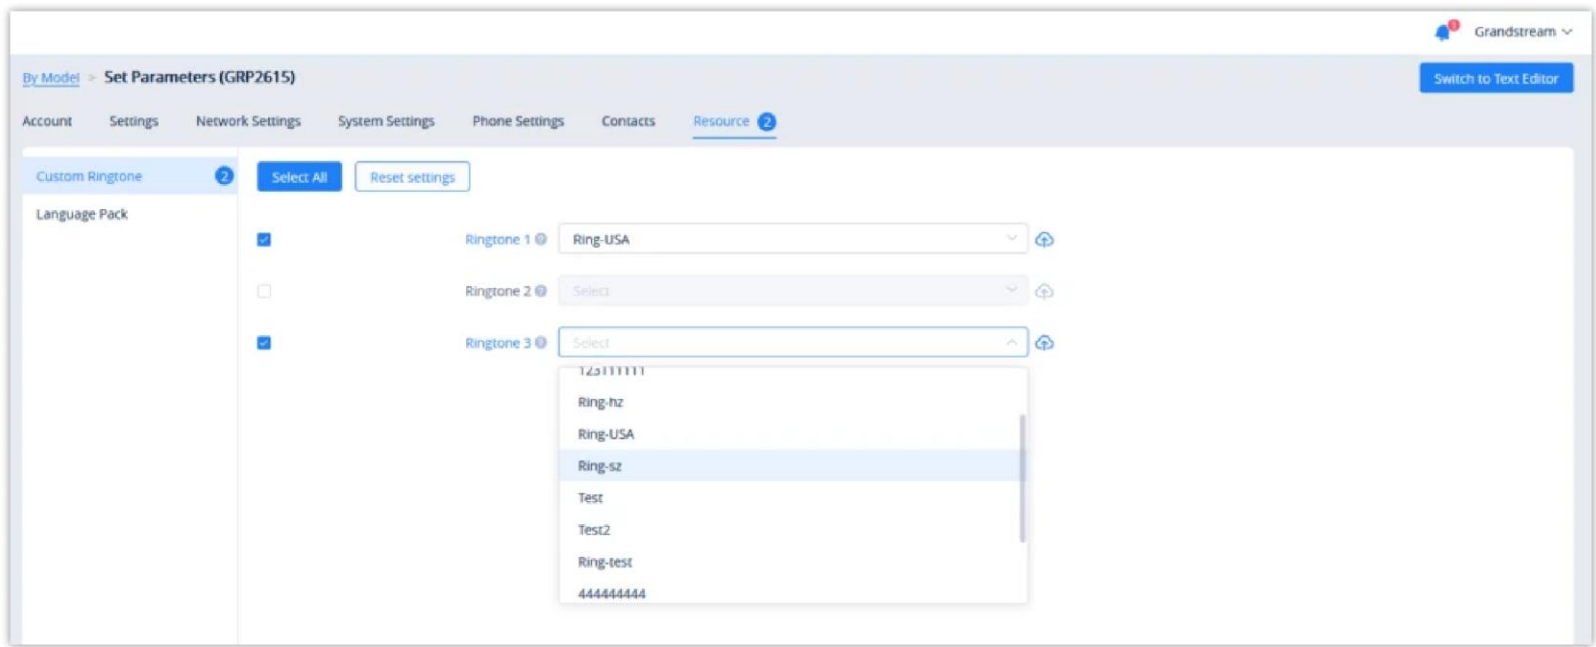

Resource Configuration

- 2. On the “Custom Ringtone” page, for Ringtone 1 to Ringtone N, select a ringtone file from the resources for each ringtone index.

- 3. On the “Language Configuration” page, select a language pack from the resources for the device.
- 4. After clicking the “Save” button, the device of this model will download the resource file from the firmware path once the device is connected to the GDMS platform for the first time.
- 5. Or, users can click the “Push” button to push the template of the model to the device. Then, the device will download the resource file from the firmware path.

 For each device model, the size and duration of each ringtone are different. If the duration and size exceed the limit, the system will intercept the resource file to the maximum limit automatically.

Push Update

Users could push the configuration template to the device manually.

- 1. Select a specific configuration template, and click on the button



following the template.

Push Configuration Update

* Run Device

Select device

Enter MAC Address

Site

Search MAC/Name

MAC Address

Device Name

User ID

00:0B:82:F5:52:84

GRP2614

—

Total 1

< 1 >

10/page

Cancel

Update Now

Schedule Config Update

Selected Device: 1

MAC Address

Device Name

User ID

00:0B:82:F5:52:84

GRP2614

—

Total 1

< 1 >

10/page

Push Configuration File

- 2. Users can select any device in this device model to push the configuration template, and the device will be updated with the configuration template.
- 3. Users can either push the configuration template immediately or schedule the configuration push for a specified time. If the latter is selected, users will need to enter a name and time for the scheduled push.

Schedule Config Update

* Task Name

* Run Time

2019-04-04 14:55

-

End Time

Cancel

OK

Schedule Config Update

- 4. Click on the **Save** button to finalize the task. Users can check the task status on the **Task Management** page.

Edit Template

To edit the configuration template’s name, site, and description, click on the  button for the desired template.

×

Edit Model Template

!

This template is automatically pushed only when the device under the site is connected to GDMS for the first time.

*

Name

GRP_template

*

Model

GRP2614

▼

*

Auto Provision to Devices in

☒ All Sites

☐ Select Site

☐ None

Description

Cancel

Save

Edit Model Template

Download Model Template Configuration

To download the configuration template of a device model, click on the  button for the desired template.

☐	DP All	DP750	All Sites	test	2019/01/09 07:47	   
--------------------------	--------	-------	-----------	------	------------------	---

Download Configuration Template

Copy Model Template

On the main page of the Model Template, the user can copy one or multiple templates and apply them to a different organization, this allows the user to copy the configuration easily across many organizations.

To copy a template, please tick the box on the left side of the template name, then select [Copy Template](#).

×

Copy Template

*

Target Organization

Default

▼

*

Auto Provision to Devices in

☐ All Sites

☒ Select Site

☐ None

Site

▼

!

This template is automatically pushed only when the device under the site is connecting to GDMS for the first time.

☐ Remember current selection

Cancel

OK

Copy Template


- **Target Organization:** Select the organization to which you want to copy the template to.
- **Auto Provision to Devices in:** You can select "All Sites", "Select Sites", or "None". The rules are the same as those for creating model templates.

After the templates have been copied successfully, the templates will be added to the "By Model" page of the selected organization, and the template's name will be "Original Template Name_Copy".

Delete Model Template

To delete configuration templates from GDMS, select the desired templates and click on the **Delete** button in the top left corner of the **By Model** page.


template saved at the time of scheduling. A scheduled task will not fail due to deleted templates.

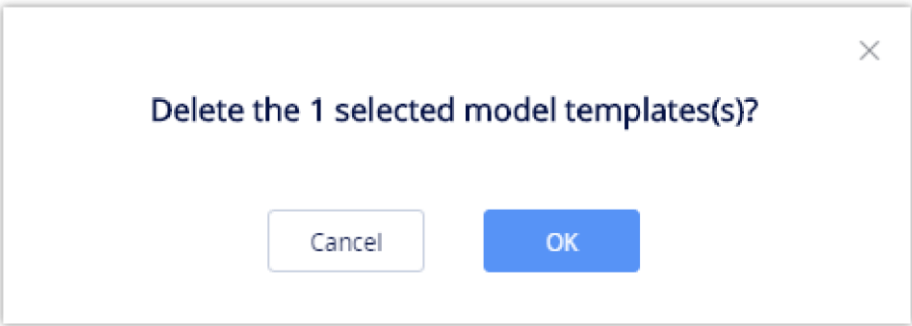

Delete Template

By Site

Users can customize device templates based on sites. The users will be able to configure devices based on the sites to which they have been assigned.

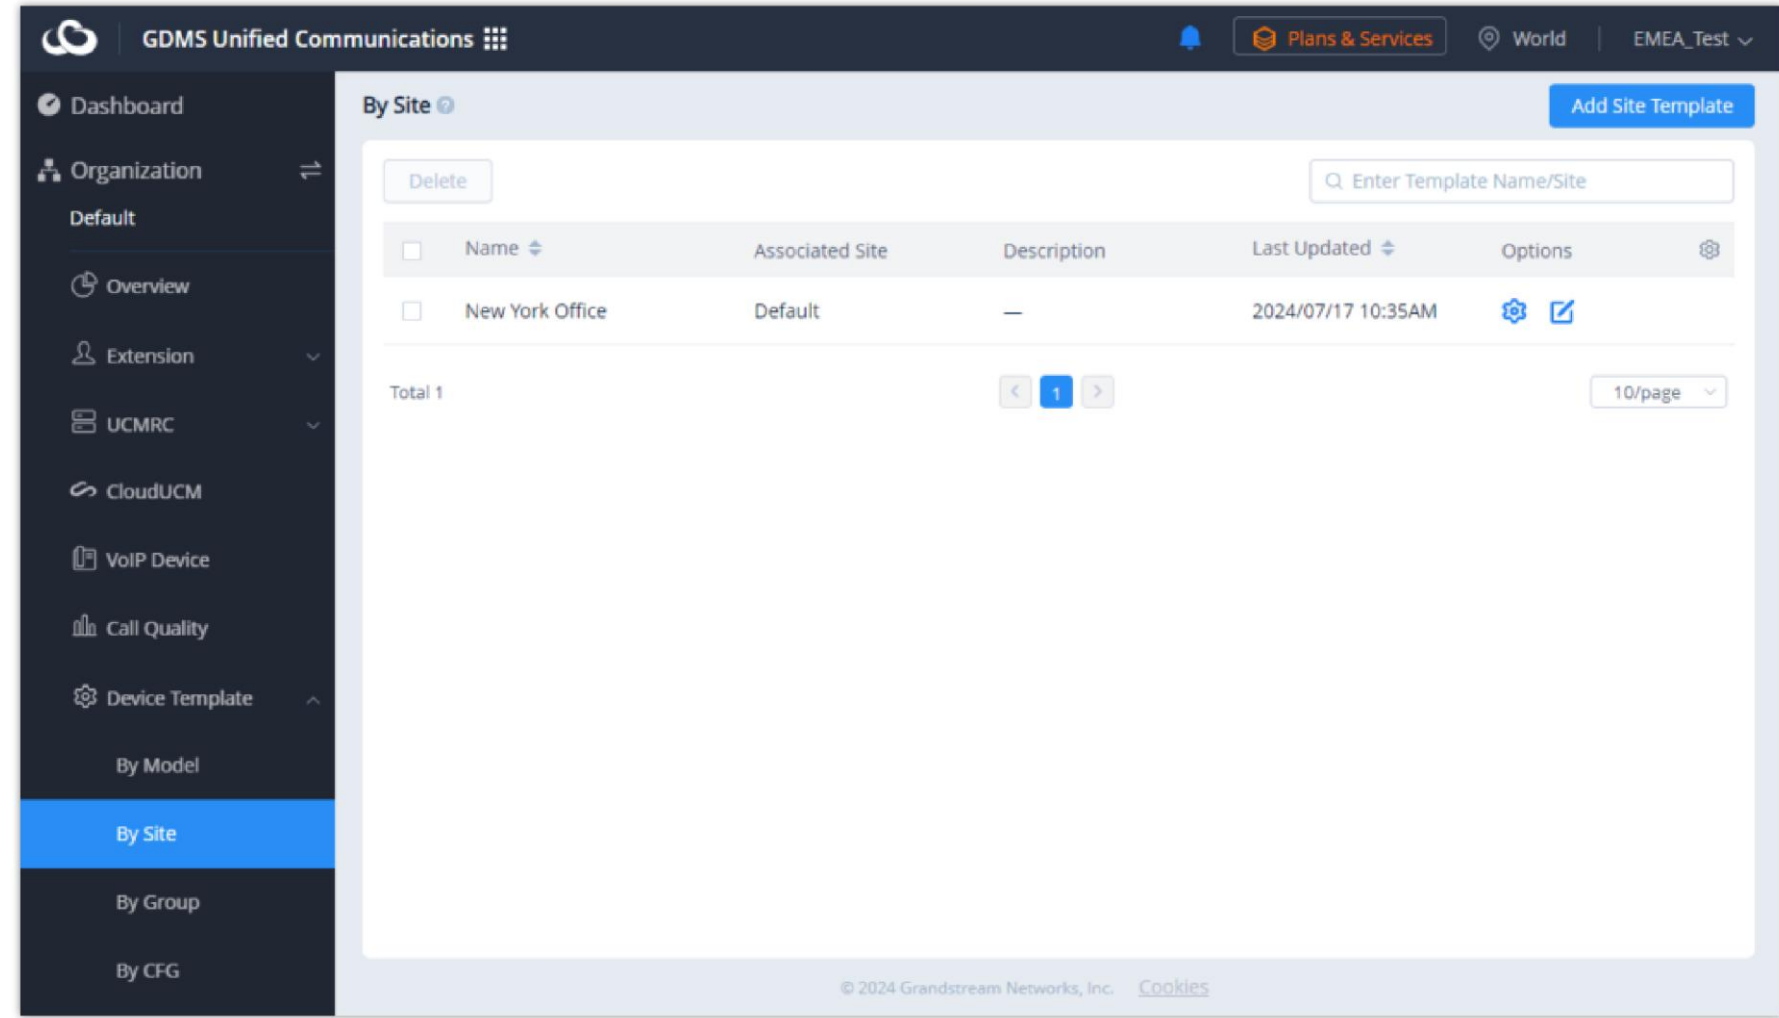

Device Template By Site

Add Site Template

To add a template, please click [Add Site Template](#)

Add Site Template

*

Name

Main Office

*

Auto Provision to Devices in

Default

Description

Template for the IP phones located in the main office.

Cancel

Save

Add Site Template

- **Name:** Enter the name of the template.
- **Auto Provision to Devices in:** Choose the site on which the template will be applied to.
- **Description:** Enter a description for the template.

: Use this button to edit the information related to the template.

: Use this button to change the configuration of the template.

By Group

Users could customize the configuration template by group. Users could configure a group and update the configuration template by group. For example, users could classify a batch of devices into a group and configure/manage the devices in the group. Users could push the configuration template to the group members on the GDMS platform.

Users could view the group configuration template and the devices list in each group.

Users could modify the configuration parameters, push the configuration to the devices, edit the group and members, and download the configuration template by group.

By Group

Add Group Template

Delete

Copy Template

All Types

Q Enter Group Name

☐	Group Name	Type	Group Description	Device Number	Last Updated	Options	
☐	General IP Phones	General Series	—	0	2024/07/17 10:41AM	   	
☐	GRP Series	GRP Series	—	1 	2024/07/17 10:41AM	   	

Total 2

<

1

>

10/page

By Group

Add Group Template

Users can add a group at any time on the GDMS platform.

1. Click on the **Add Group Template** button at the top right of the **By Group** page.

[By Group](#) > **Add Group Template**

* Group Name

* Type

Select

Description

CFG File

Upload

Cancel

Next

Add Group

Group Name	Enter the name of the group to identify it easily. Names must be unique and have a maximum character limit of 64.
Type	Users need to select the type: ● General Series: This is used to configure the general parameters which exist across all the supported devices. ● DP Series: Use the configuration template for the DP Series ● HT Series: Use the configuration template for the HT Series ● GRP Series: Use the configuration template for the GRP Series ● GXP Series: Use the configuration template for the GXP Series ● GXV Series: Use the configuration template for the GXV Series ● GVC Series: Use the configuration template for the GVC Series ● WP Series: Use the configuration template for the WP Series ● Audio Phone Series (GXP, GRP): Use the configuration template for the common parameters in the GXP Series and GRP Series ● GSC Audio Conference Series: Use the configuration template for the GSC Audio Conference Series ● GSC Video Surveillance Series: Use the configuration template for the GSC Video Surveillance Series ● GDS Series: Use the configuration template for the GDS Series ● GXW4200 Series: Use the configuration template for the GXW4200 V2 Series ● GAC Series: Use the configuration template for the GAC Series ● GHP Series: Use the configuration template for the GHP Series ● Control Stations: Use the configuration template for GSC control stations ● CloudUCM: Use the configuration template for the CloudUCM ● SoftwareUCM: Use the configuration template for the SoftwareUCM
Description	Enter the detailed description and purpose of the configuration template.

2. Once complete, users will be redirected to the device selection page to add devices to the group. Users can either select devices from the list or manually enter the MAC addresses of the devices. Selected devices will be moved to the **Selected Device** list on the right of the page.

By Group > Add Group Template

* Run Device

Select device

Enter MAC Address

Site

All Models

Search MAC/Name

MAC Address

Device Name

Model

User ID

☒

00:0B:82:9A:8F:F7

GRP2614

GRP2614

☒

00:0B:82:E9:95:4C

GXV3370

GXV3370

☐

00:0B:82:F9-AE:66

hll

GRP2614

☐

00:0B:82:E3:62:7C

—

GXP2135

—

☐

00:0B:82:E2:08:D8

—

GXV3370

—

☐

00:0B:82:9A:8F:FD

~!@#\$%^&*

GRP2614

—

☐

00:0B:82:D0:55:A0

GXV3370

GXV3370

☐

00:0B:82:E2:07:B0

GXV3370

GXV3370

☐

00:0B:82:E3:06:8E

wp820设备

WP820

—

☐

00:0B:82:D3:97:70

ymyhu-wp820:

WP820

—

Total 109

<

1

2

3

4

...

11

>

10/page

Selected Device: 2

MAC Address

Device Name

Model

User ID

00:0B:82:E9:95:4C

GXV3370

GXV3370

×

00:0B:82:9A:8F:F7

GRP2614

GRP2614

×

Total 2

<

1

>

10/page

Cancel

Prev

Save

Finish Adding Group

3. Users could click on the “Prev” button to go back to the group configuration page to re-edit the group information.
4. Click on the **Save** button to complete the group member selection. Users will then be redirected to the **Set Parameters** page.

Users need to set the parameters of the configuration template for the newly added group.

Set Parameters

Users could set the unique parameters of the devices in the group in the configuration template to push the unique parameters to the devices in the group.

Select a specific group, and click on the button to access the group member parameters configuration page.

- Clicking on the **Select All** button will select every option on the current page. Clicking on it again will deselect all the options.
- Clicking on the **Reset Settings** button will restore all settings on the current page to default values.
- Clicking on the button



following the account, users can copy and paste the current account configuration to other accounts.

- When users try to configure the device wallpaper or screensaver image, users can select a picture from the resources list, or upload the local picture to GDMS and configure it to the device.

☒

Wallpaper Server Path ?

☒

Wallpaper Source ?

Download

Ringtone Configuration

- Modify the desired settings on the page or click on the Edit Configuration File to configure device settings via text editing (i.e. p-values). The key can be either a P-value or an alias.

-
- The available settings for each model template are different. For more details on acceptable configuration values, please refer to the user guide for each device model.
 - When the user adds a new model configuration template in the GDMS platform, the GDMS platform will not push the template to the existing devices in the GDMS platform, and the GDMS platform will only push the newly added template automatically to the new associated devices in the system.

- When the settings of a template are modified, the changes will not be automatically applied to related devices. Users will need to manually push the configuration to devices.
- For the newly added devices, the devices will acquire the updated configuration template automatically.
- If a scheduled task involves a modified template, the task will use the template settings at the time of scheduling, not the newly modified settings.


Configure Resource Files

Users can configure custom ringtones and language for devices (Supported models: GXP/DP series).

1. Select a specific group, and click on the button



to access the group member parameters configuration page.

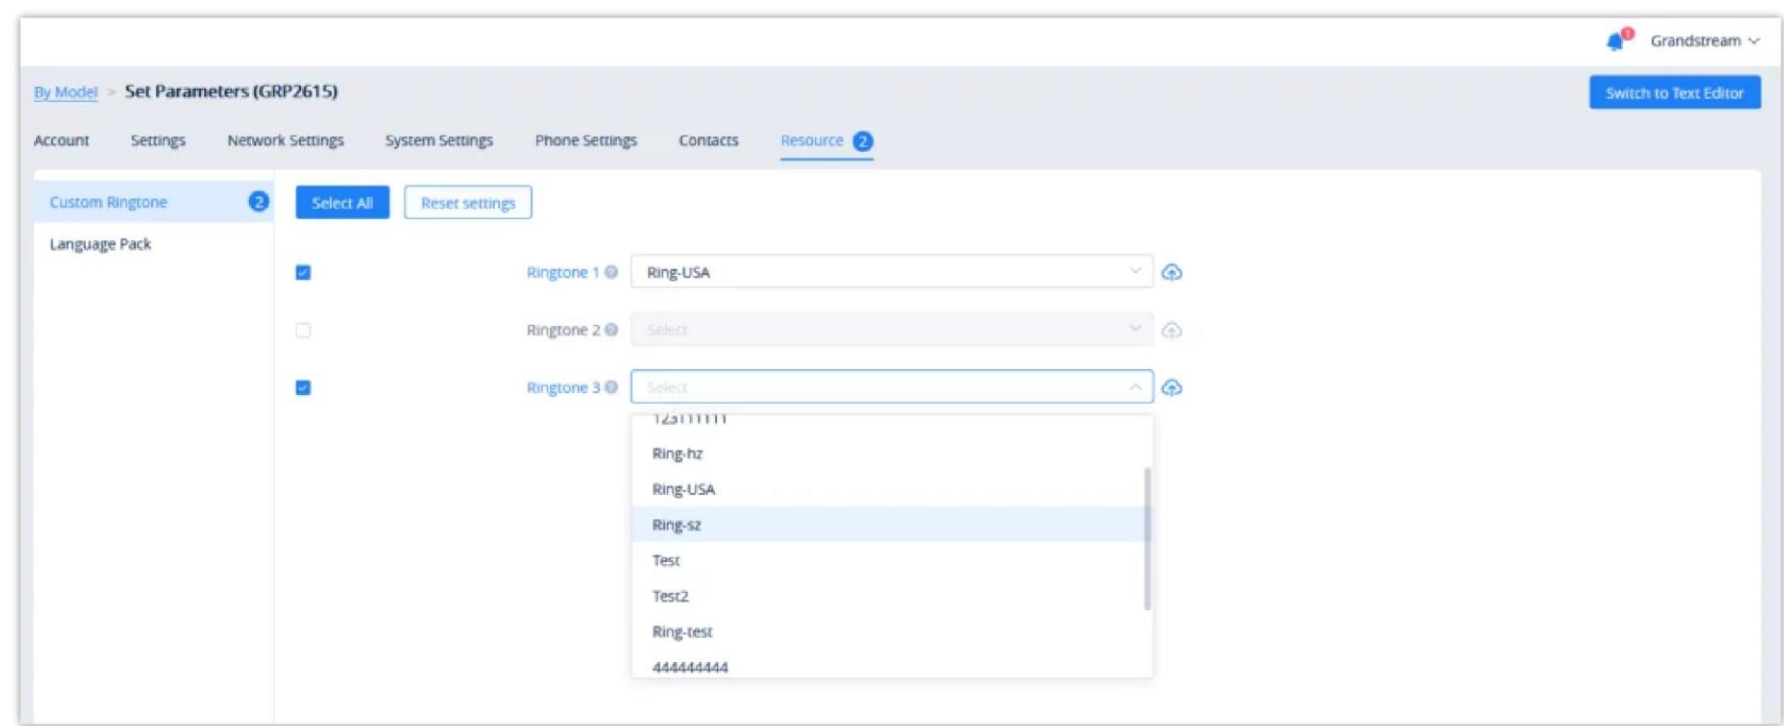

Resource Configuration

2. On the “Custom Ringtone” page, for Ringtone 1 to Ringtone N, select a ringtone file from the resources for each ringtone index.
3. On the “Language Configuration” page, select a language pack from the resources for the device.
4. After clicking the “Save” button, the configured parameters and resources will be saved in the system. When the user clicks the “Push” button to push the template to the device, the device will download the resource file from the firmware path.

 For each device model, the size and duration of each ringtone are different. If the duration and size exceed the limit, the system will intercept the resource file to the maximum limit automatically.

Push Update

Users could push the group configuration template to the device manually.

1. Click on the



button for the desired group.

Push Configuration Update

* Run Device

Select device

Enter MAC Address

Site

All Models

Q Search MAC/Name

Selected Device: 1

MAC Address	Device Name	Model	User ID
00:0B:82:F5:52:84	GRP2614	GRP2614	—

Total 1

<

1

>

10/page

MAC Address	Device Name	Model	User ID
☒ 00:0B:82:F5:52:84	GRP2614	GRP2614	—
☐ 00:0B:82:D0:44:C0	GXV3370	GXV3370	

Total 2

<

1

>

10/page

Cancel

Update Now

Schedule Config Update

Push Update

2. In addition to being able to push the configuration template to all or select members of the group, users can also push it to non-members.

3. Users can either push the configuration template immediately or schedule the configuration push for a specified time. If the latter is selected, users will need to enter a name and time for the scheduled push.

4. Click on the **Save** button to finalize the task. Users can check the task status on the Task Management page.

Edit Group Template

Users could edit the group name, descriptions, and group members.

1. Click on the



button for the desired group.

☐	HZ-Department 1	Non-DP Series	—	2 ⓘ	2019/01/17 03:29	
--------------------------	-----------------	---------------	---	-----	------------------	------------------------

Edit Group

2. Modify the desired settings and click on the **Save** button to finalize changes.

New members of an existing group will not automatically obtain the group configuration template. The template must be manually pushed to the new member devices.

Download Group Template Configuration

Users can download the group configuration template by clicking on the button for the desired group.

☐	HZ-Department 1	Non-DP Series	—	2 ⓘ	2019/01/17 03:29	
--------------------------	-----------------	---------------	---	-----	------------------	------------------------

Download Configuration File

Copy Group Template

On the main page of the Group Template, the user can copy one or multiple templates and apply them to a different organization, this allows the user to copy the configuration easily across many organizations.

To copy a template, please tick the box on the left side of the template name, then select

Copy Template

.

Copy Template

* Target Organization

Demo

Cancel

OK

Copy Group Template

Select the organization to which you want to copy the template to by selecting the organization name from the “Target Organization” list.


Delete Group Template

Users can delete groups by selecting the desired groups and clicking on the **Delete** button in the top-left corner of the **By Group** page.

The existing timing tasks involving the group configuration template will be reserved, and the timing task will be executed with the original group configuration template.

By CFG

Users can import configuration files for specific devices. Settings in these uploaded files will be used for their specified device.

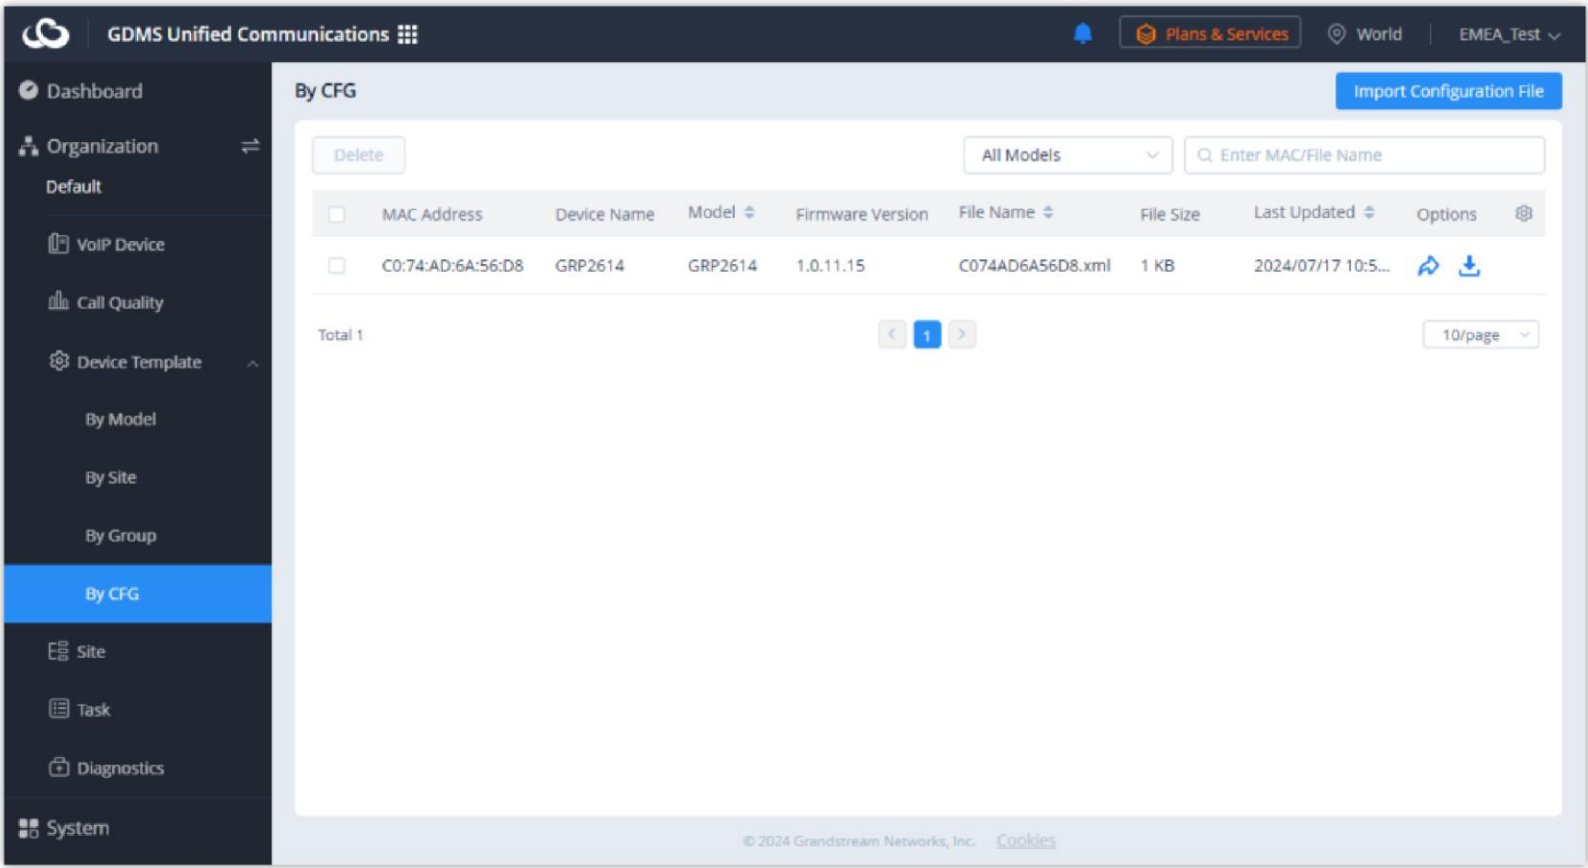


By CFG

Upload CFG File

Users could upload the custom configuration file to the GDMS platform and push the custom configuration file to the device.

1. Click on the **Import Configuration File** button at the top-right corner of the **By CFG** page. The following window will appear:

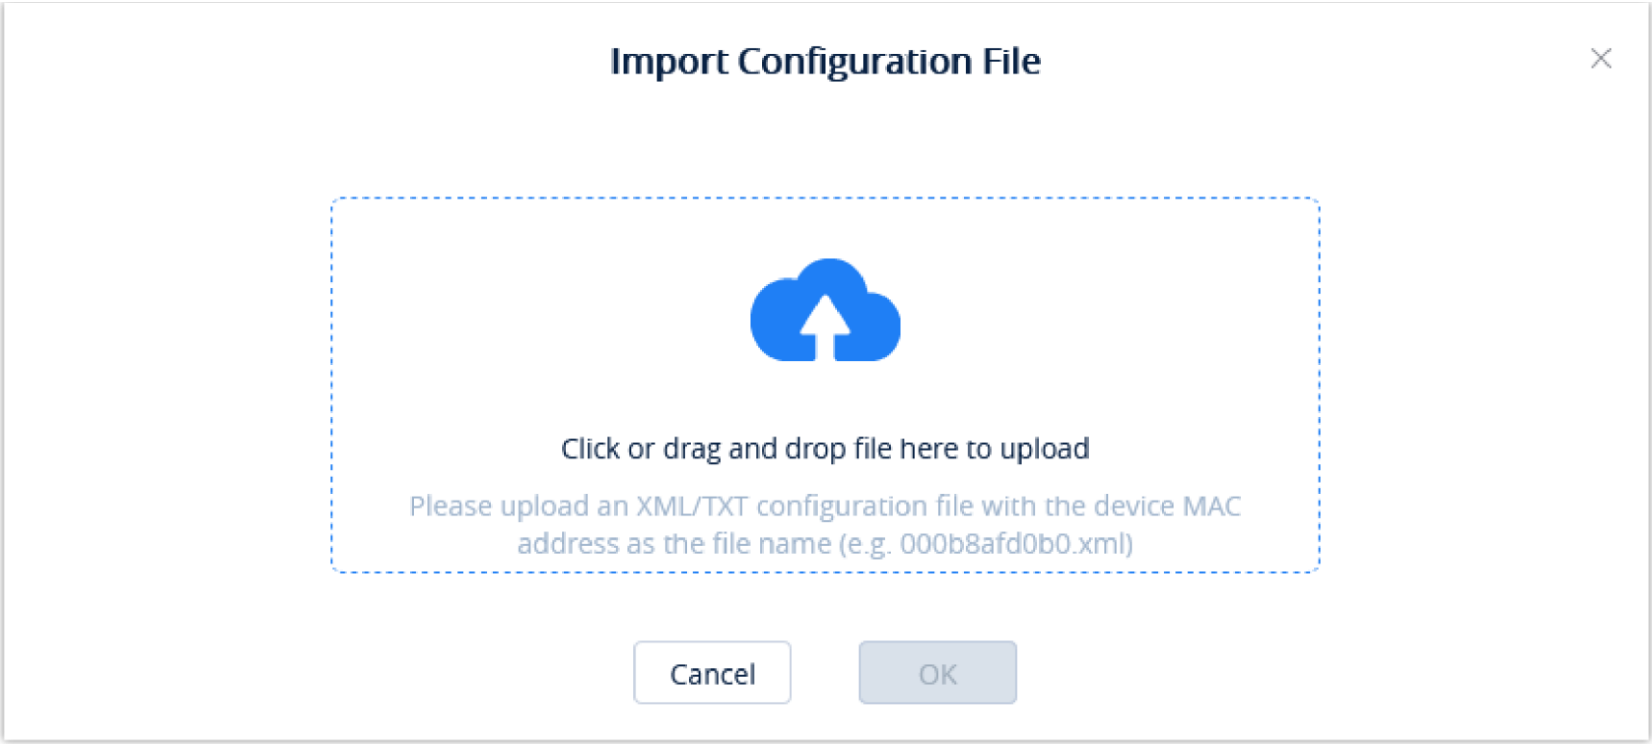


Upload CFG File

2. Drag and drop the file to the window or click on the upload icon to select a file from your PC.

 The uploaded file must be named as the device’s MAC address (e.g. 000b82afd0b0.xml).

3. Click on the **OK** button to finalize the import.
4. The following window will appear asking the user to either push the configuration to the specified device immediately or to cancel the configuration push.

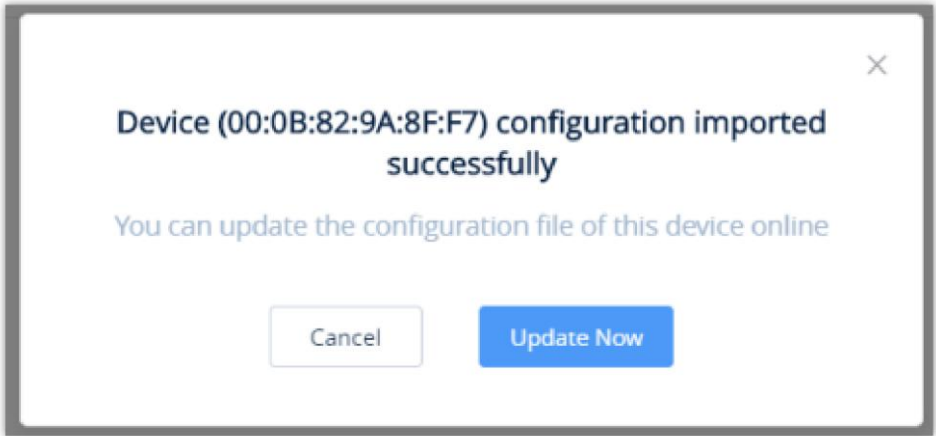

Finalize Import



- Only XML file format is supported for the uploaded custom configuration file.
- If the file name does not meet MAC address format requirements, the import will fail. When uploading another configuration file for an existing device, the previous configuration file will be overwritten

Push Update

Click on the  button for the desired device to manually push the configuration to it.

☐	00:0B:82:E5:8C:C9	DP750	1.0.6.3	000B82E58CC9.xml	41.79 KB	2019/01/24 11:41	 
--------------------------	-------------------	-------	---------	------------------	----------	------------------	---

Push Update

Download Configuration File


Click on the  button for the desired device to get its configuration file.

Delete CFG File

To delete uploaded configuration files from GDMS, select the desired devices in the list and click on the **Delete** button at the top left of the **By CFG** page.

Site

Site page allows users to organize their devices by sites and categories.

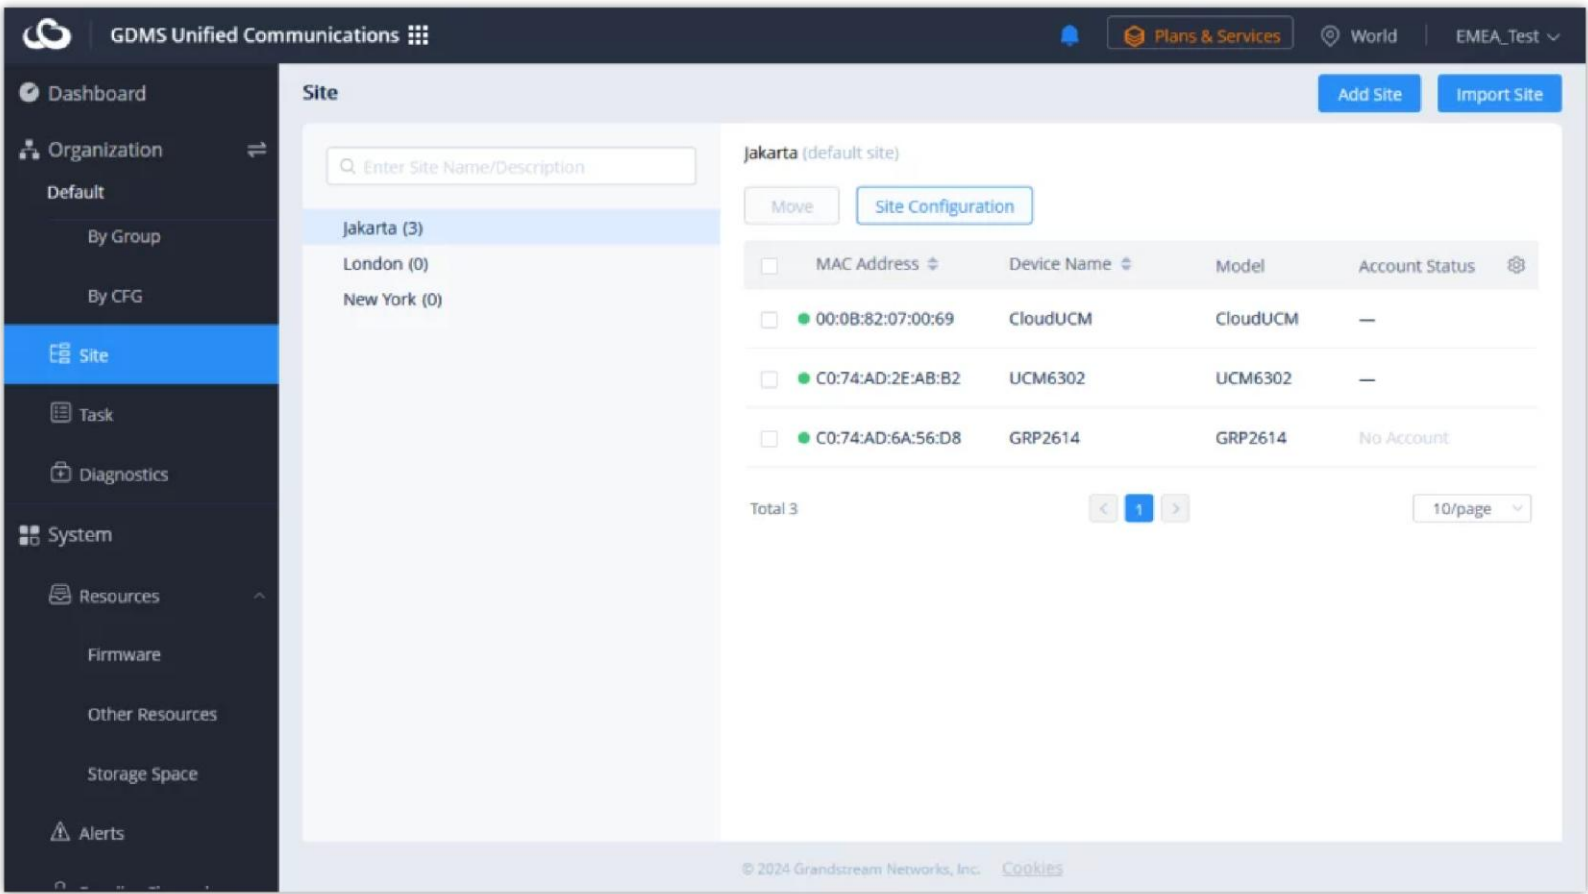

Site Management

Add Site

Users can add a site at any time on the GDMS platform.

- 1. Click on the **Add Site** button at the top right of the **Site Management** page. To quickly add a sub-site under a specific site, click on the



button next to the desired site. Users can create a total of 7 different levels of sites.

Add Site

*

Name

Parent Site

Site

Description

Cancel

Save

Add Site

Site Name	Enter a name for the site to identify it easily. Sites on the same level cannot have the same name.
Superior Site	The parent level of the site. This field can be left blank if the created site is a top-level site.
Site Description	Enter the descriptions of the site.


Add Site

2. Once the site is created, users can then assign devices to it.

Batch Import Sites

Users could import a batch of sites into the GDMS platform.

1. Click on the **Import Site** button at the top right corner of the **Site Management** page. The following window will appear:

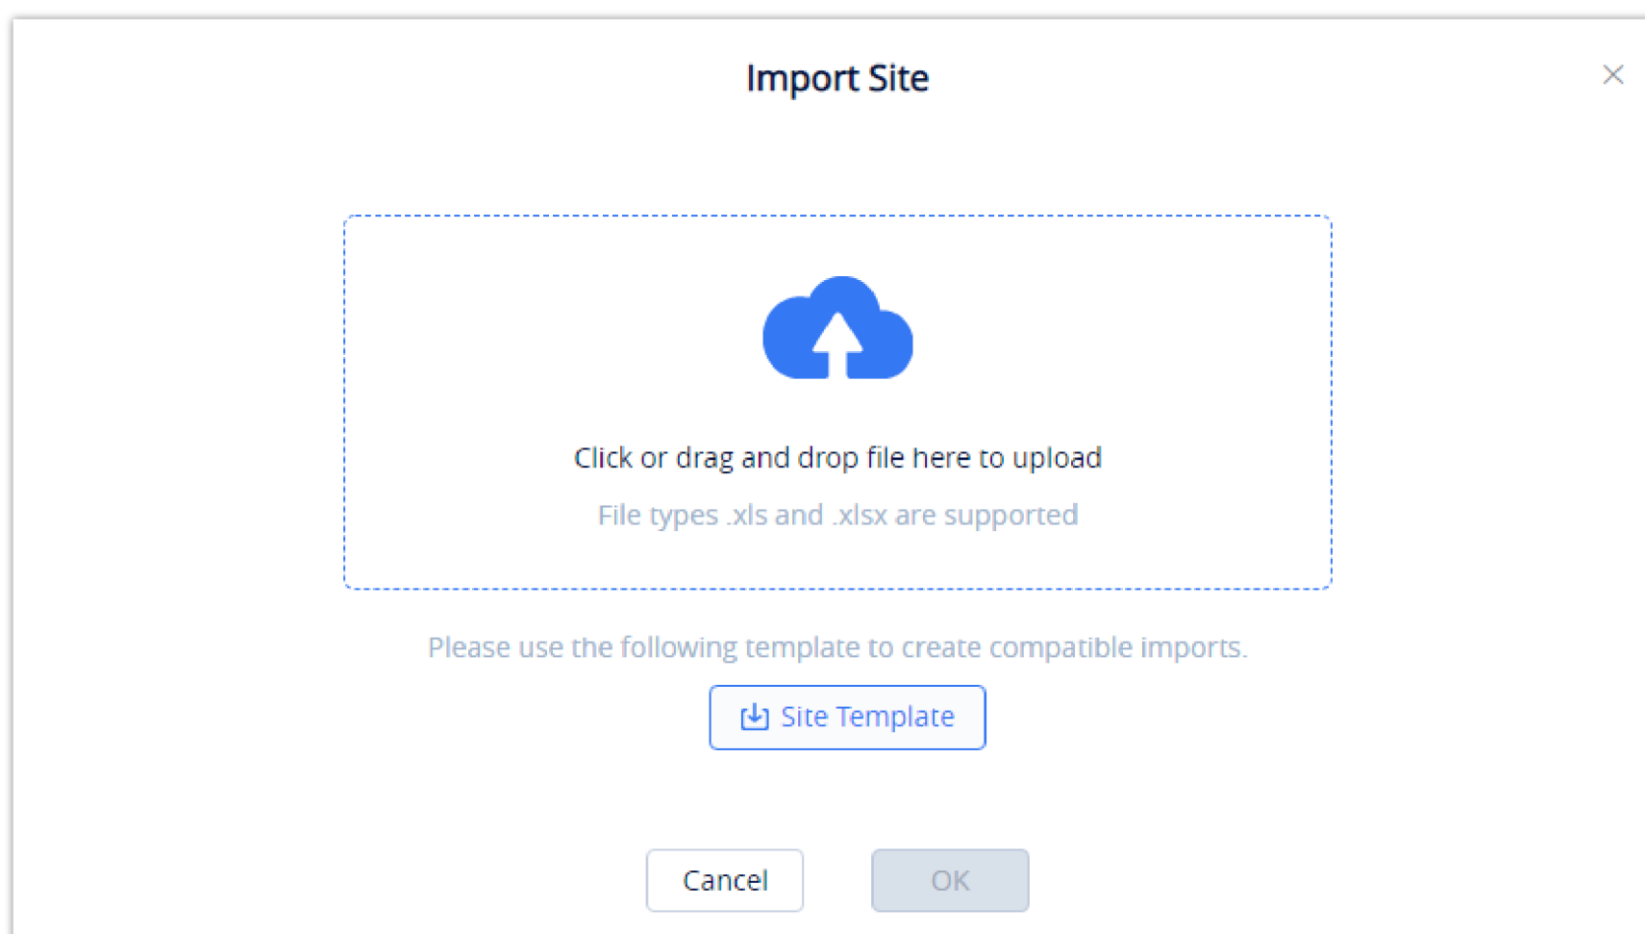

Import Site

2. Click on the **Download** button to get a template that will be used to import site information.

	A	B
1	Instructions: 1. Fields marked with * are required and cannot be empty. 2. Site Name format: 1st Level Site/2nd Level Site/.../New Site. Users must enter the names starting from the 1st Level Site. If the higher level sites do not exist, they will be created automatically. If no higher level site name is entered, this site name will be used by default to fill in missing site names. 3. Site Name maximum character limit is 64 characters. 4. Site Description maximum character limit is 256 characters.	
2	*Site Name	Description
3		
4		
5		
6		
7		

Site Template

Site Name	Enter the name of the site. If the site is the child of another site, users must enter the entire path (e.g. top-level site/second-level site/third-level site/...new site name).
Description	Enter the descriptions of the site.

Site Template Options

3. Once the template is filled out, drag, and drop the file to the upload window or select the file from your PC. Click on the Import button to confirm the import.

4. When the Excel file is imported into the GDMS platform successfully, the GDMS platform will prompt the execution result. If there is data that failed to be imported, the user could export the failed data and re-edit the Excel file.

❗ If an imported site has the same name as another site on the specified level, the import will fail.


Edit Site

Users could edit the information of the site on the GDMS platform.

1. Click on the



button next to the desired site.



2. Edit the desired fields and click on the **Save** button to finalize changes.

Edit Site

*

Name

Grandstream

Parent Site

Site

Description

Level 1

Cancel

Save

Edit Site

Delete Site

To remove a site from GDMS, click on the button next to the desired site.

ℹ If the selected site has devices assigned to it, the site cannot be deleted unless the devices are assigned to another site beforehand.

Transfer Site

Users can select devices on a site and move them to another site by clicking on the **Move** button.

Move

*

Site

Site

Cancel

Save

Transfer Site

Clicking on the **Save** button will finalize the move to the specified site.

Task

The **Task Management** page displays all queued and completed tasks in GDMS such as configuration pushes, firmware upgrades, reboots, and factory resets. Users can add, edit, and delete tasks from this page.



Users can only manage the devices in the current organization of the current system. If the user does not have the permissions on the device, the user cannot manage tasks on the device.

Add Task

To add a task to GDMS, click on the **Add Task** button.

Task > Add Task

*

Task Name

Enter Task Name (up to 64 characters)

*

Task Time

☒ Immediate

☐ Scheduled

☐ Interval

*

Task Type

Upgrade Firmware

Select Device Model

Select Firmware Version

*

Upgrade Method

☒ Concurrent Upgrade

10

device(s)

☐ Sequential Upgrade

*

Current Firmware Range

All Versions

*

Target Device(s)

☒ All devices of this model

☐ Select Device

☐ Enter MAC Address

Cancel

Save

Add Task

Task Name	Enter the name of the task.
Task Time	● Immediate: The task will be run immediately. If the task is not run after 5 minutes, GDMS will automatically close it. ● Scheduled: Schedule the task to run at a specified time. The task will end at the specified end time, even if there are still devices queued up to run the task. ● Interval: Users could configure the recurring tasks such as daily, weekly, monthly, Nth week of each month, and perform a certain task. Specify the start date and time when the task will start, then specify the Duration of the task. If a device goes online during the duration of the task, the scheduled task will be performed as soon as the device goes online. If the device goes online after the task’s duration, the task will not performed on that specific device. ● Permanent: This option applies only when the task type is Firmware Upgrade. Every time a corresponding device is added, the device will be upgraded. This is a reccurent task.
Task Type	● Reboot Device: VOIP device, UCM6300 Series devices, and CloudUCM. ● Factory Reset: VOIP devices and CloudUCM. ● Upgrade Firmware: Users will need to select the device model and firmware version to upgrade to. VoIP device and IPPBX device. ● Update Config: Model: Select the model template that will be used for the configuration update push. Applicable to VoIP devices and CloudUCM. ● Update Config: Group: Select the group template that will be used for the configuration update push. Applicable to VoIP devices and CloudUCM.
Upgrade Method	This option is available only when Upgrade Firmware is selected as the Task Type. ● Sequential Upgrade: Devices are upgraded one by one in a sequence. Recommended to minimize network traffic.

	● Concurrent Upgrade: All devices are upgraded simultaneously. This option may cause heavy network traffic. To ensure network quality, the user can also limit the maximum number of concurrent devices, such as upgrading 10 devices at the same time.
Current Firmware Range	This option is available only when Firmware Upgrade is selected as the Task Type. Devices will be upgraded only if they meet certain requirements: ● All: Upgrade all devices regardless of their current firmware version. ● Specific Firmware Version: Upgrade devices on the specified firmware version. ● Firmware Version Range: For the selected devices, only the devices in a specified firmware version range (Lowest firmware version ≤ x ≤ Highest firmware version) will be upgraded.
Target Device(s)	● All devices of this model. ● Select Device. ● Enter MAC Address.

Add Task

Click on the **Save** button to finalize the task creation. Users can view this task in the **Task Management** list.


Task Name	Task Type	Task Time	Creator	Status	Run Time	Operation
Immediate Task	Upgrade Firmware	Immediate	yxxu123	Success	2019/03/25 07:06	
1111	Reboot Device	2019/03/20 12:00 ~ 2019/03/21 12:00	yxxu123	Cancelled	—	
Immediate Task	Update Config: Model	Immediate	yxxu123	Timeout	—	
Immediate Task	Update Config: CFG	Immediate	yxxu123	Failed	—	
Immediate Task	Update Config: CFG	Immediate	yxxu123	Failed	—	
Immediate Task	Upgrade Firmware	Immediate	yxxu123	Success	2019/02/21 03:14	
222	Reboot Device	Immediate	yxxu123	Success	2019/02/19 02:51	
222	Upgrade Firmware	2019/02/19 17:00 ~ 2019/02/20 17:00	yxxu	Success	2019/02/19 17:00	

Task Management List

- If there are multiple tasks for 1 device, they will be queued up to run in order of their configured start time.
- If a device is offline, pending tasks associated with the device will be run the next time the device is offline.
- Certain tasks and device setting changes can cause a device to reboot.
- Firmware upgrade tasks may require more time to run due to the size of some firmware files.
- The latest configuration files or firmware will be generated for each cycle of the recurring tasks, and the system will collect all devices of this specific model, and then execute the corresponding task.
- If the task is created in a specific sub-system, the user can view the task only in the corresponding sub-system, and other sub-system users cannot view it.

View Task Status

Users can see the status of all completed and pending tasks by looking at the **Status** column.

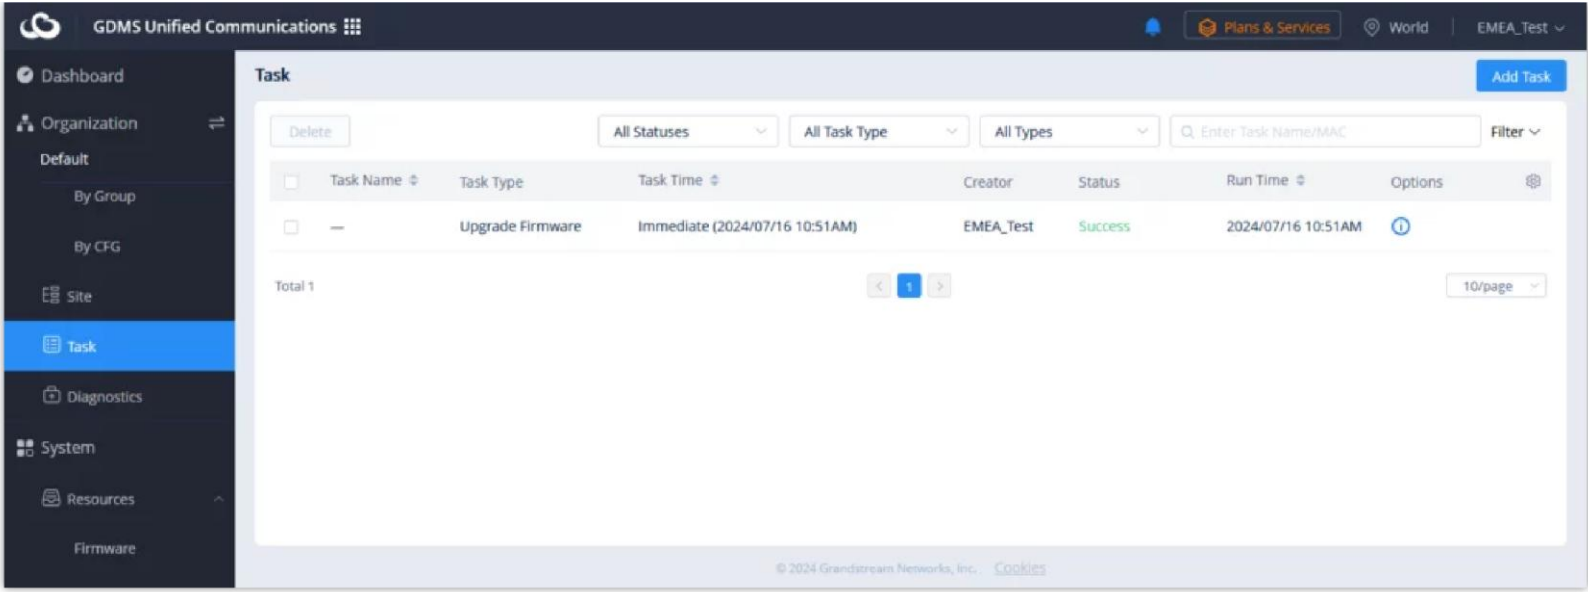


View Task Status

Pending	The task has not been executed yet.
Executing	The task is currently in progress.
Success	The task has been completed successfully.
Failed	The task has failed.
Canceled	The task was canceled.
Timeout	The task was not executed when it arrived at the ending time.
Ended	The task was ended before it could be completed. Some of the involved devices may not have run the task before it ended.

Task Status Description

To view more details about a task, click on the  button for the desired task. Users can view the task status of each device involved.

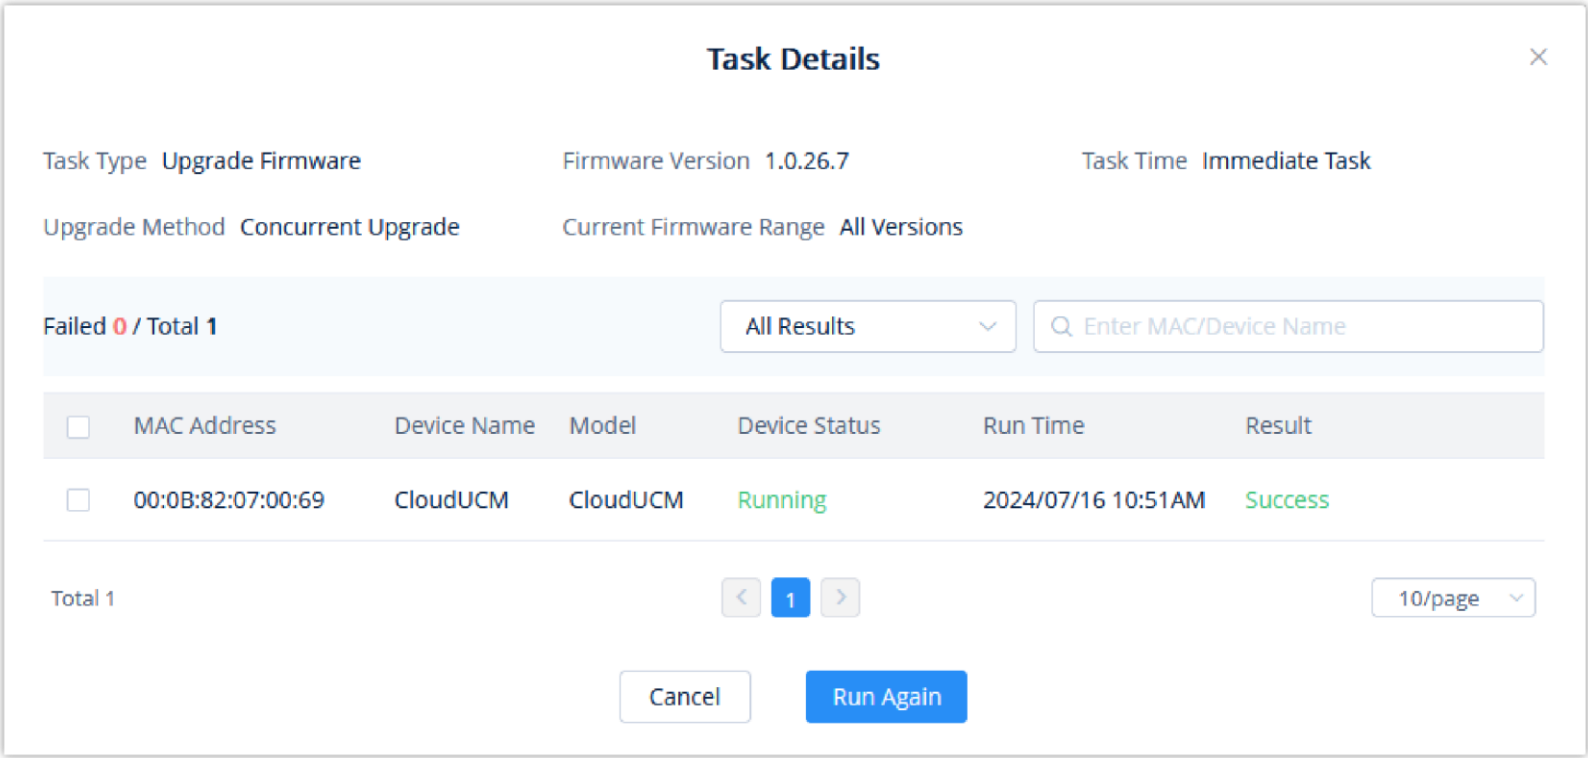

Task Status

Pending Executed	The task has not been run yet.
Executing	The task is currently ongoing.

Success	The task has been completed successfully.
Failed	The task has failed. A failure reason will be shown.
Timeout	The task has been sent to the device, but the device has not responded yet.
Success (Timeout)	The task has been completed successfully for this device, but it was completed later than the specified time.
Canceled	The task has been canceled before the starting time.
Ended	The task was ended before it could be completed. Some of the involved devices may not have run the task before it ended.

Task Status Detailed Description

Users could re-create tasks for the executed failed devices or all devices. If the user re-creates tasks for certain devices, all attributes of the task and all executed device information will be logged on the “Re-create Task” page.

Start Scheduled Tasks

Users can start pending scheduled tasks immediately by clicking on the  button.

Cancel Pending Tasks

To cancel a pending task, click on the  button for the desired task. The task status will be changed to Cancelled. To run the task again after it is completed, click on **Task Details → Run Again** for the desired task.

If the task is recurring, users could select whether to cancel the entire recurring task or just cancel the single task.


End Task

To stop a running task, click on the  button to immediately end it.

If the device has already executed the task (e.g. Reboot Device), the device will finish the task; if the device does not start to execute the task, the device will not execute the task anymore.

Search Task

Users can search for specific tasks by using the search bar and filter at the top-right of the top-right corner of the **Task Management** page.

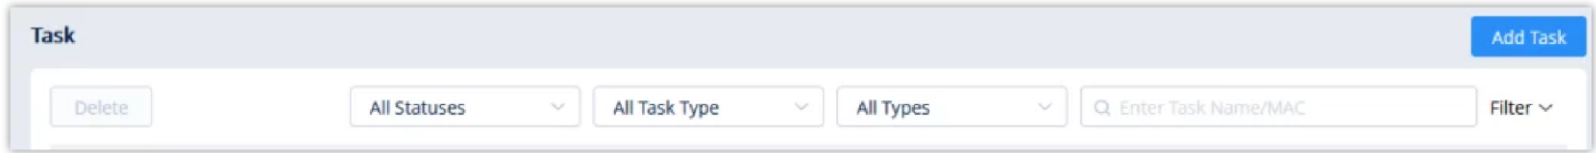

Search Task

Delete Task

Users can delete tasks at any time. Select one or more tasks and click on the **Delete** button at the top of the page to delete them.

 When deleting ongoing tasks, GDMS will automatically suspend and delete them. Any changes made before the task was suspended cannot be undone.

Diagnostics

Device Diagnostics allows users to check devices on GDMS for issues, view device information, obtain network captures and Syslog, and conduct traceroutes.

Support to diagnose VoIP devices and IPPBX devices.

The user can view the diagnosis status of the device in the current organization of the current system. If the user does not have the relevant permissions, the user cannot diagnose the corresponding device.


Start Diagnostics

To start diagnosing a device, users can do one of the following:

1. Enter the device’s MAC address and click on the **Start Diagnostics** button.
2. Click on the



button for the desired device in the list to diagnose the device.

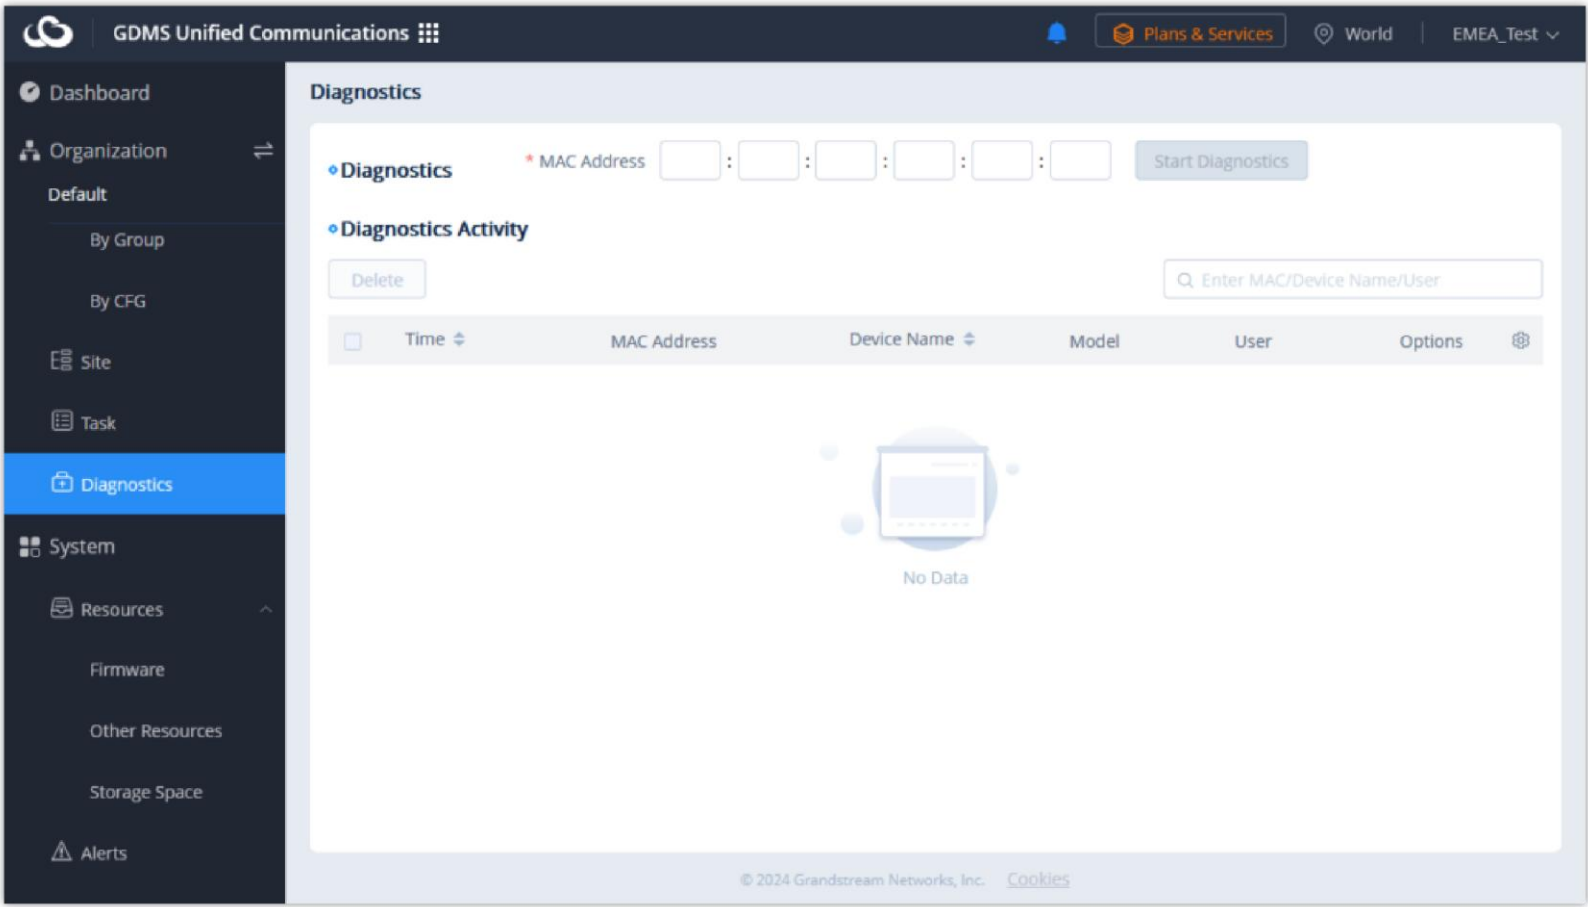


Device Diagnostics

- If the device is offline, users cannot diagnose this device on the GDMS platform.
- Devices that are currently being diagnosed by a user cannot be diagnosed by other users.

View Device Details


Click on the button on the right of the **Device Diagnostics** page to view information about the device.

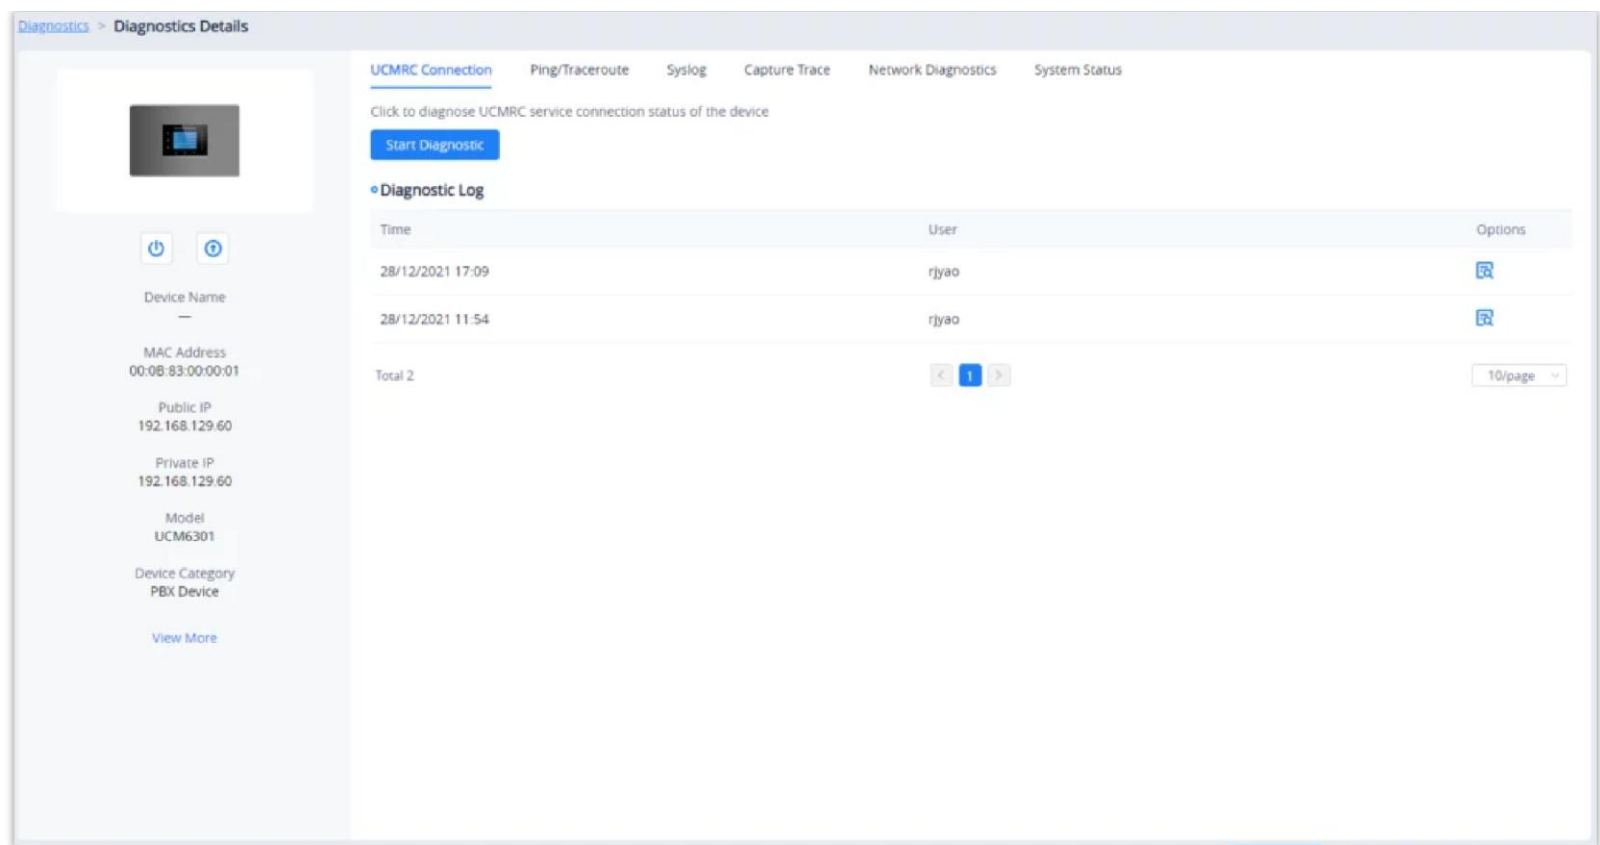

View Device Details

On the Diagnostics Details page, users can quickly perform operations on the devices, including restarting the devices, factory resetting the devices, updating the configuration, and upgrading the devices. Users can also view detailed information about the device, including device name, MAC address, public/private IP address, device model, and device type on this page.

Click on the button  next to the diagnosis record to view the specific diagnosis result of the device.

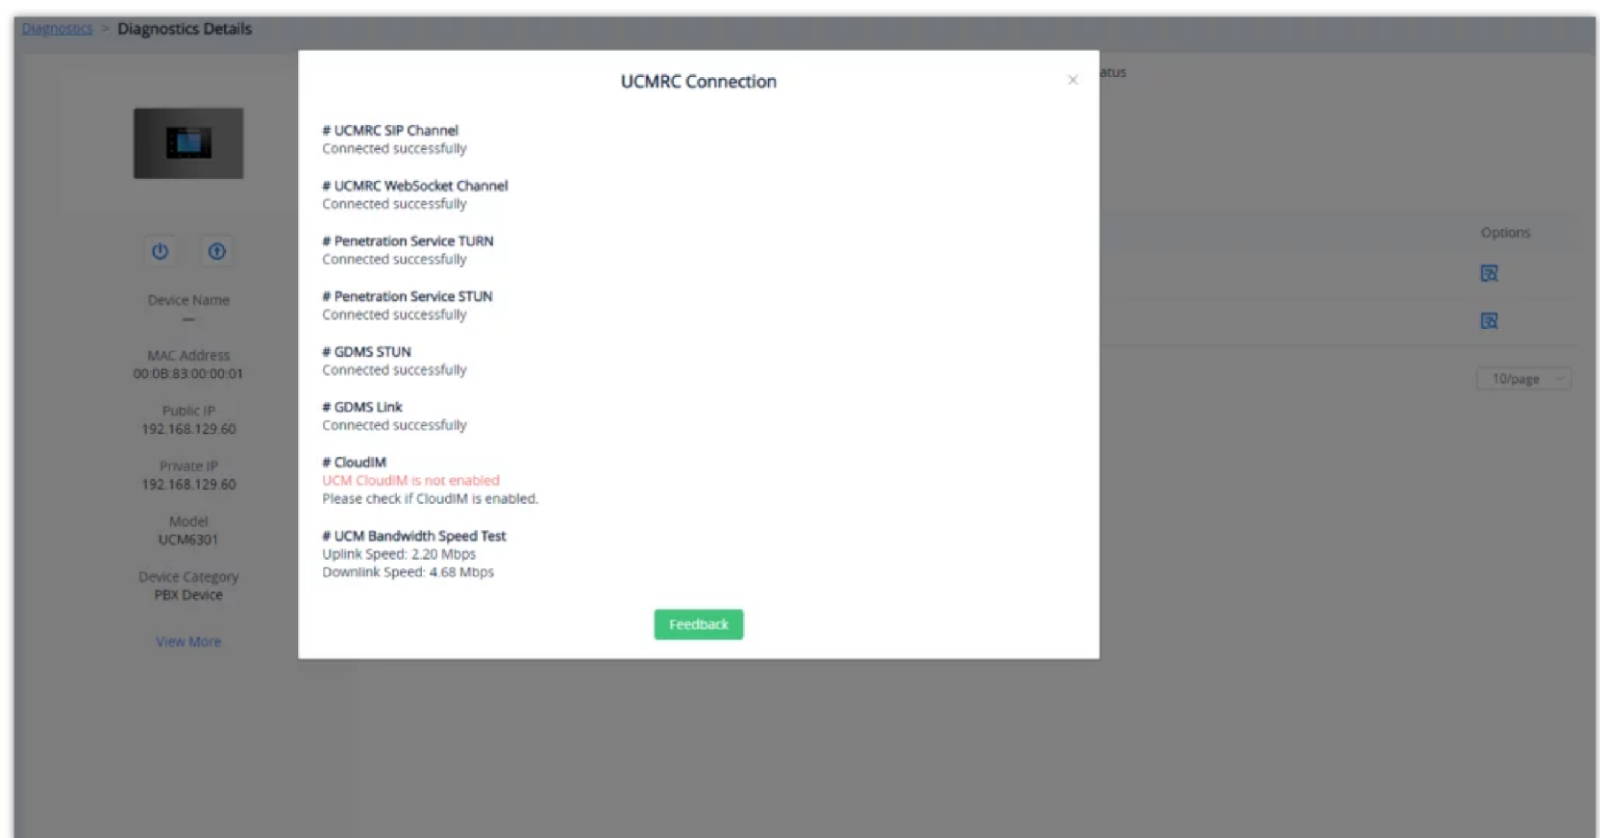

View Diagnosis Result


Notes

- The IPPBX series and GXW45XX devices do not support resetting to factory and updating configuration files through the GDMS platform.
- The diagnosis record only displays the diagnosis data of the device in the last 30 days.
- If the device is offline, the user still can view the diagnosis record of the device.

UCMRC Connection

Users can diagnose the current UCMRC connection status in the GDMS platform.

Click on the button “Start Diagnosis” and wait for the GDMS platform to diagnose the device. The GDMS platform will display the diagnosis result of the UCMRC connection.

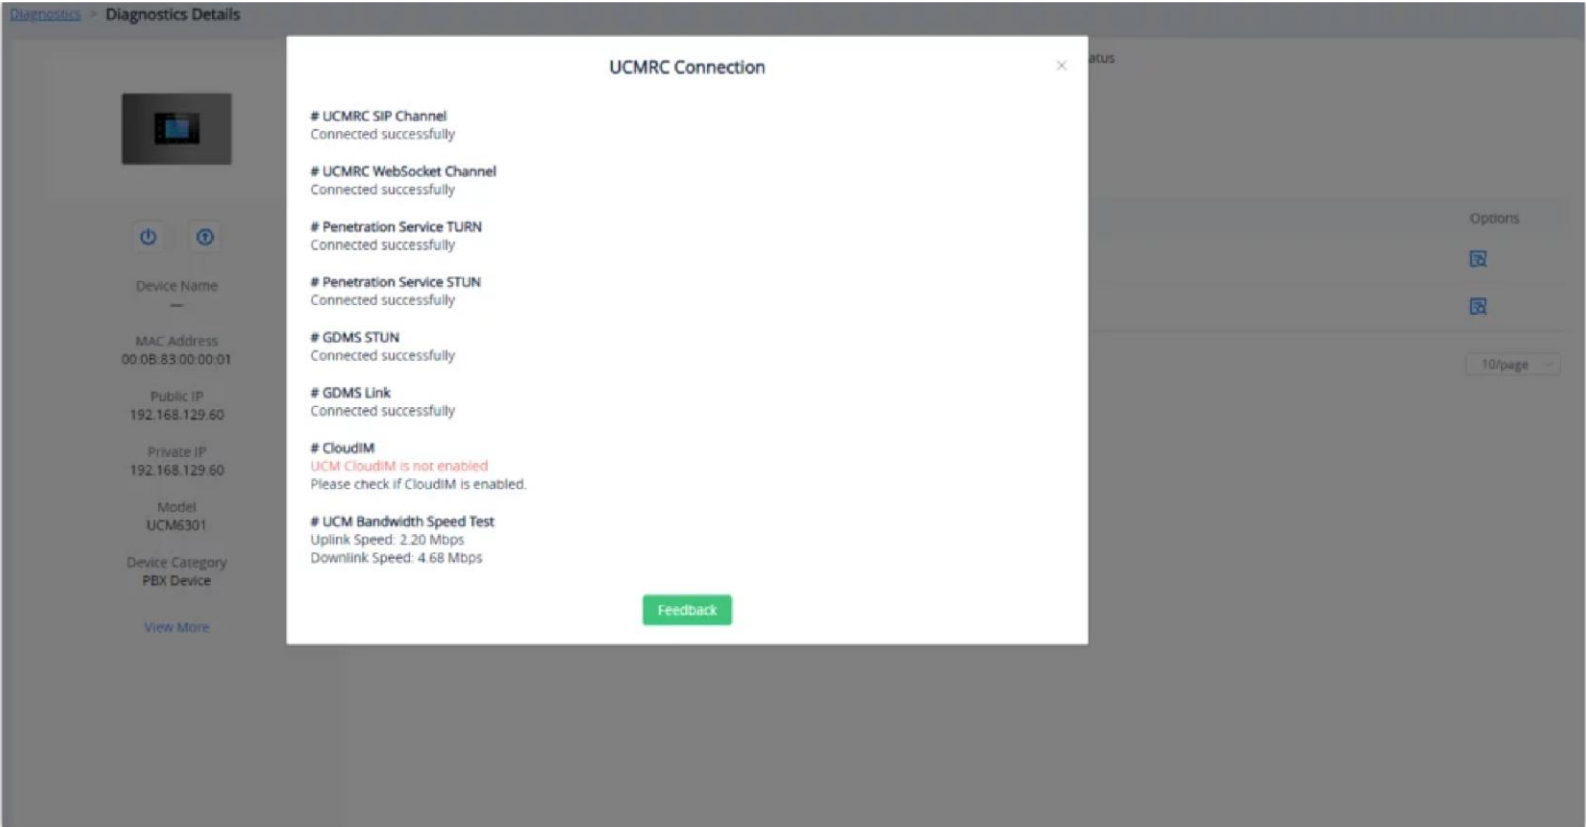

UCMRC Connection Diagnosis

If the IPPBX device that is using the UCMRC services has any problems, the user can diagnose the IPPBX device and troubleshoot the problems remotely. The user can try to fix the problems based on the suggestions and click on the “**Feedback**” button to send the logs and descriptions to our technical support.


✔

Note

It only displays the UCMRC connection diagnosis records of the device in the last 30 days.

Ping/Traceroute

Clicking on the **Ping/Traceroute** tab on the Device Diagnostics page will show the following:

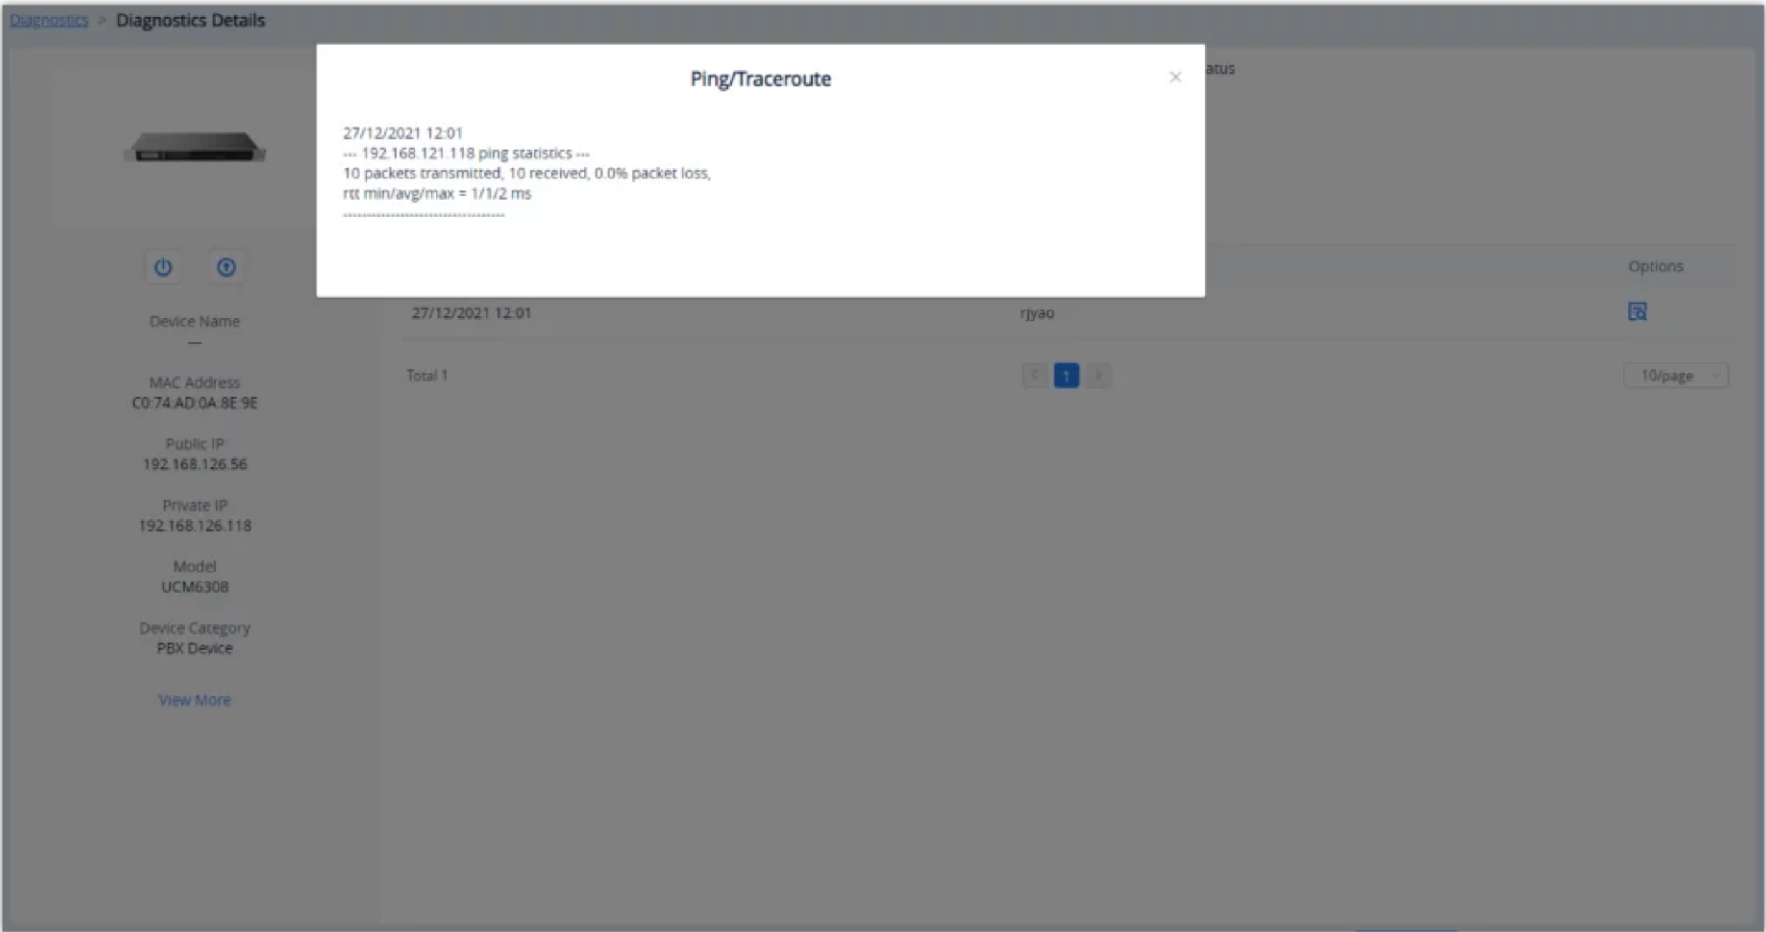

PingTraceroute

Operation Method	○ Ping: Checks the connection status and speed between the device and the target host. Results include packet loss information, maximum/minimum data packet size, and the round-trip time of the packets. ○ Traceroute: Displays the route and transit delays of packets from the device to the target host. Up to 30 hops can be monitored.
------------------	--

Target Host	Enter the IP address or hostname of the target host.
-------------	--

Ping/Traceroute Options

Users could click on the "Start" button, and wait for the GDMS system to diagnose the device, and the GDMS platform will print out the results of the diagnostics.


Each operation prints the diagnostics result once, and users can operate the diagnostics multiple times.

 To avoid canceling the ping/traceroute, do not leave the Ping/Traceroute page.

Syslog

The Syslog tool allows users to capture logs from a device.

1. To start a capture, click on the **Start** button on the **Syslog** page. At any time during the capture, users can click on the  button to download the Syslog.
2. Clicking on the **End** button will stop the capture, and the Syslog will be saved to GDMS.
3. Users can access these saved logs at any time.

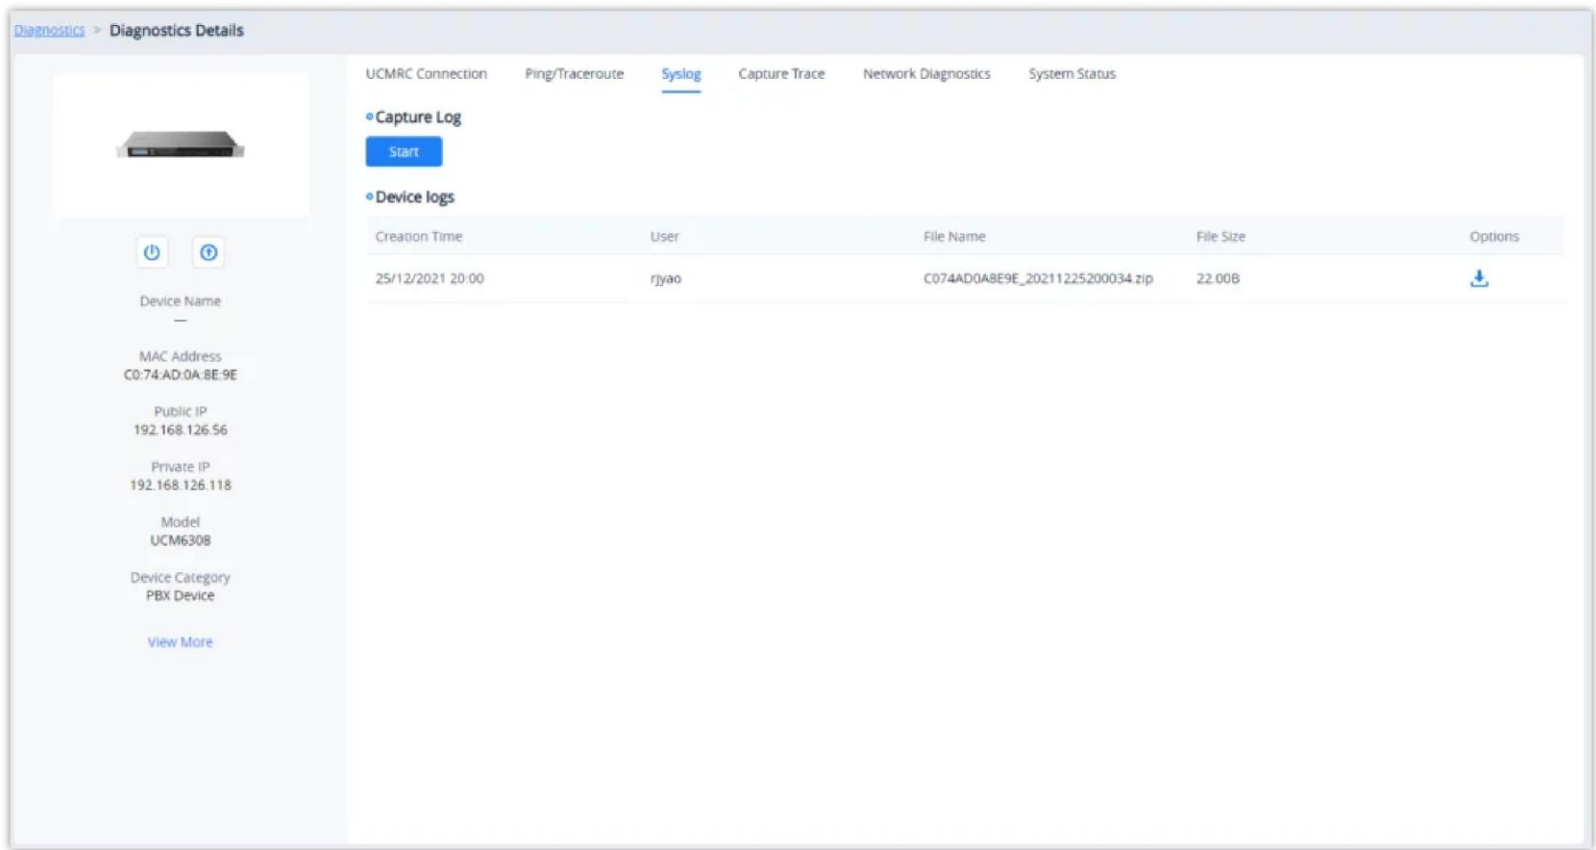

Syslog




- An ongoing Syslog capture will end automatically after 7 days.

Capture Trace

The Capture Trace tool allows users to get a network packet capture of a device.

1. Click on the **Start** button to start the packet capture.
2. Click on the **Stop** button to end the packet capture.
3. Click on the  button to download the capture file.

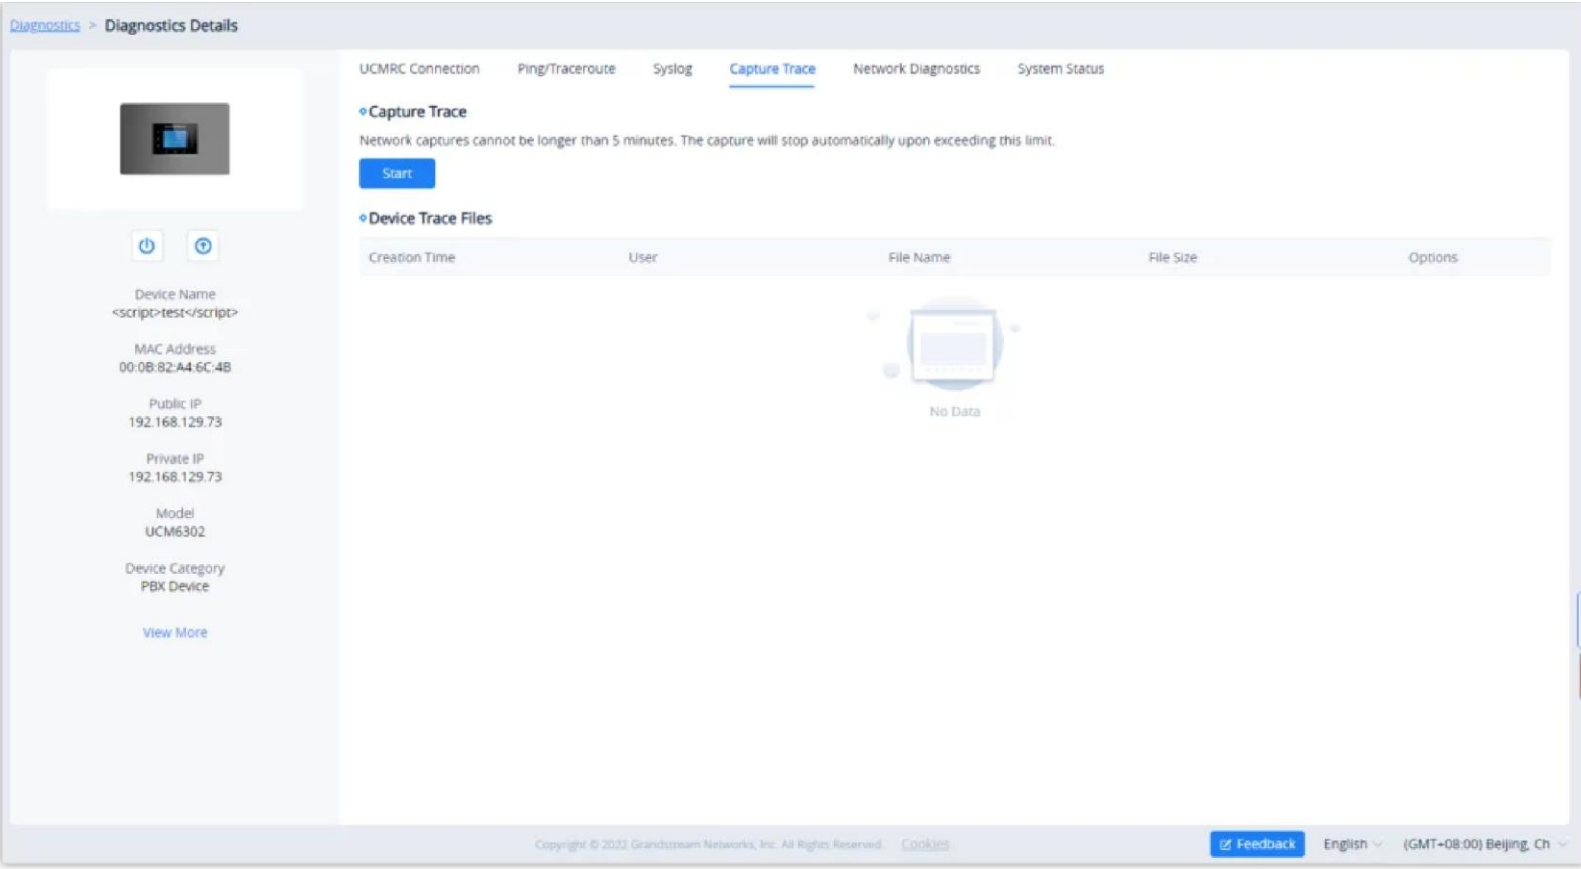

Capture Trace




- GDMS can only capture up to 5 minutes. An ongoing capture will end automatically after 5 minutes.
- Some models do not support capturing the trace file remotely.

Network Diagnostics

Users can perform network diagnostics on a specific device, including local network status, network packet loss rate and latency, uplink/downlink network rates, etc.

1. Click the “**Start Diagnostic**” button to start network diagnosis.

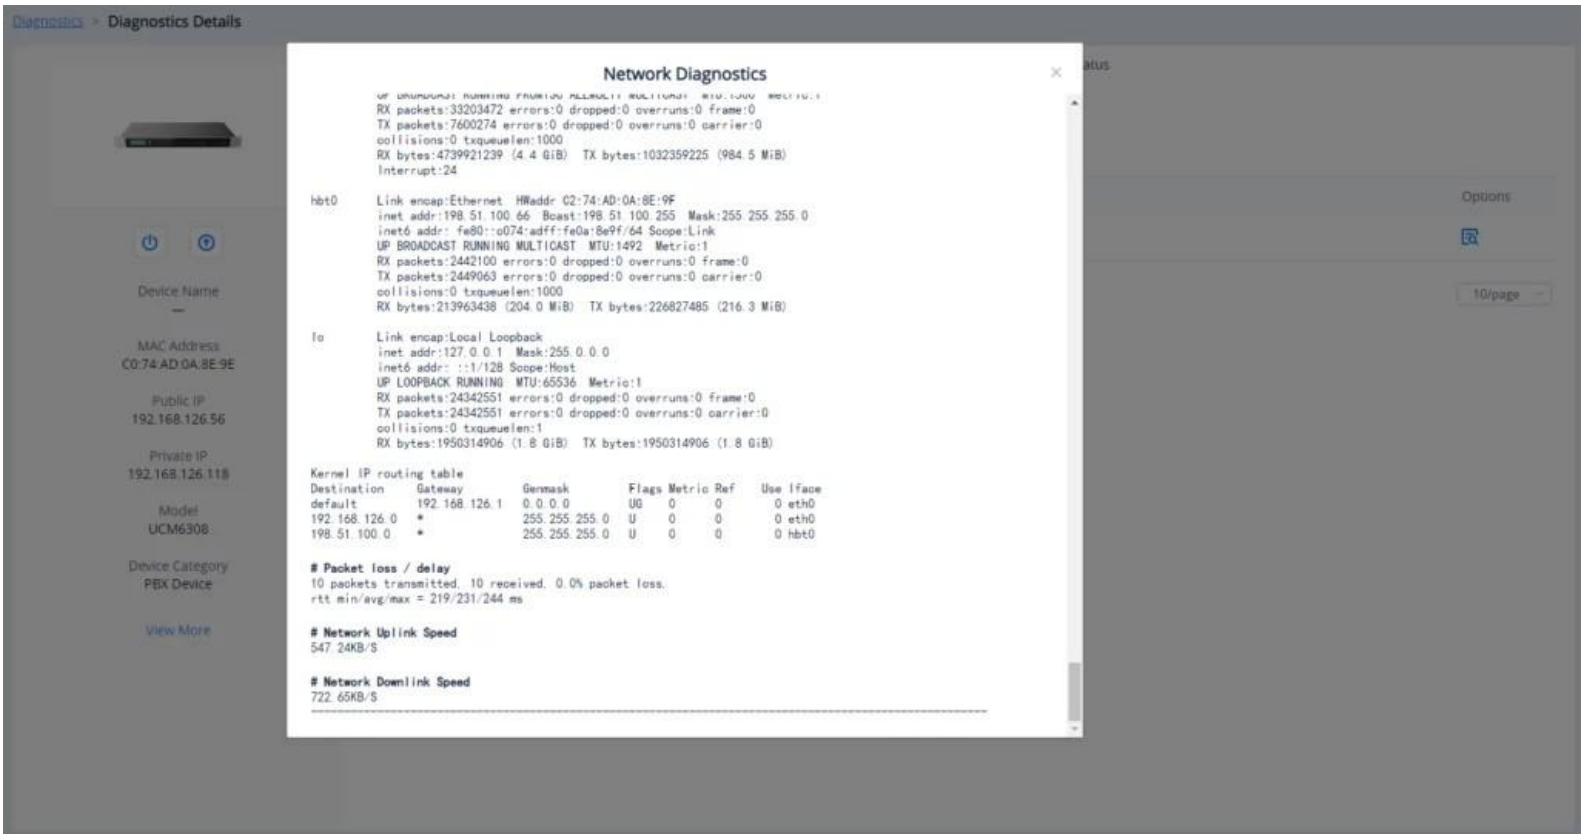

Network Diagnostics

SSH Remote Capture


One of the diagnostic tools that the GDMS provides is the ability to perform a capture trace through SSH remotely.




Important Note

Please note that SSH Remote Capture is supported currently on the GRP260X IP phones only.

To access the SSH Remote Capture feature please navigate to the **Diagnostics** tab, then click  on the corresponding device on which you would like to enable SSH Remote Capture. Then select “SSH Remote Access” tab.

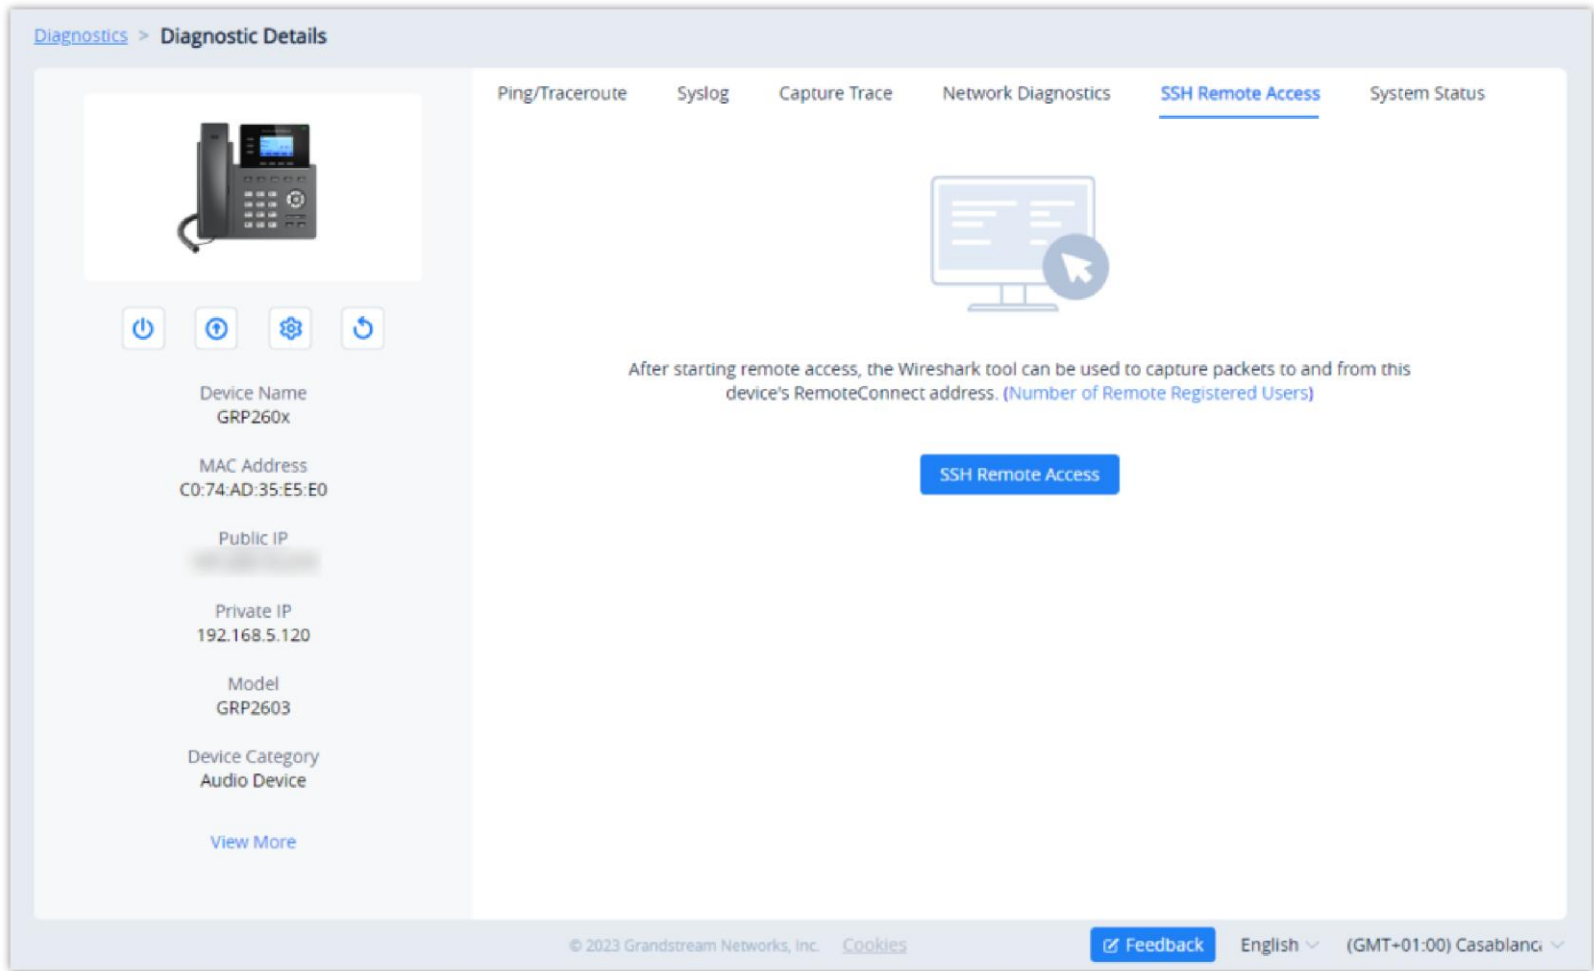

Enable SSH Remote Capture

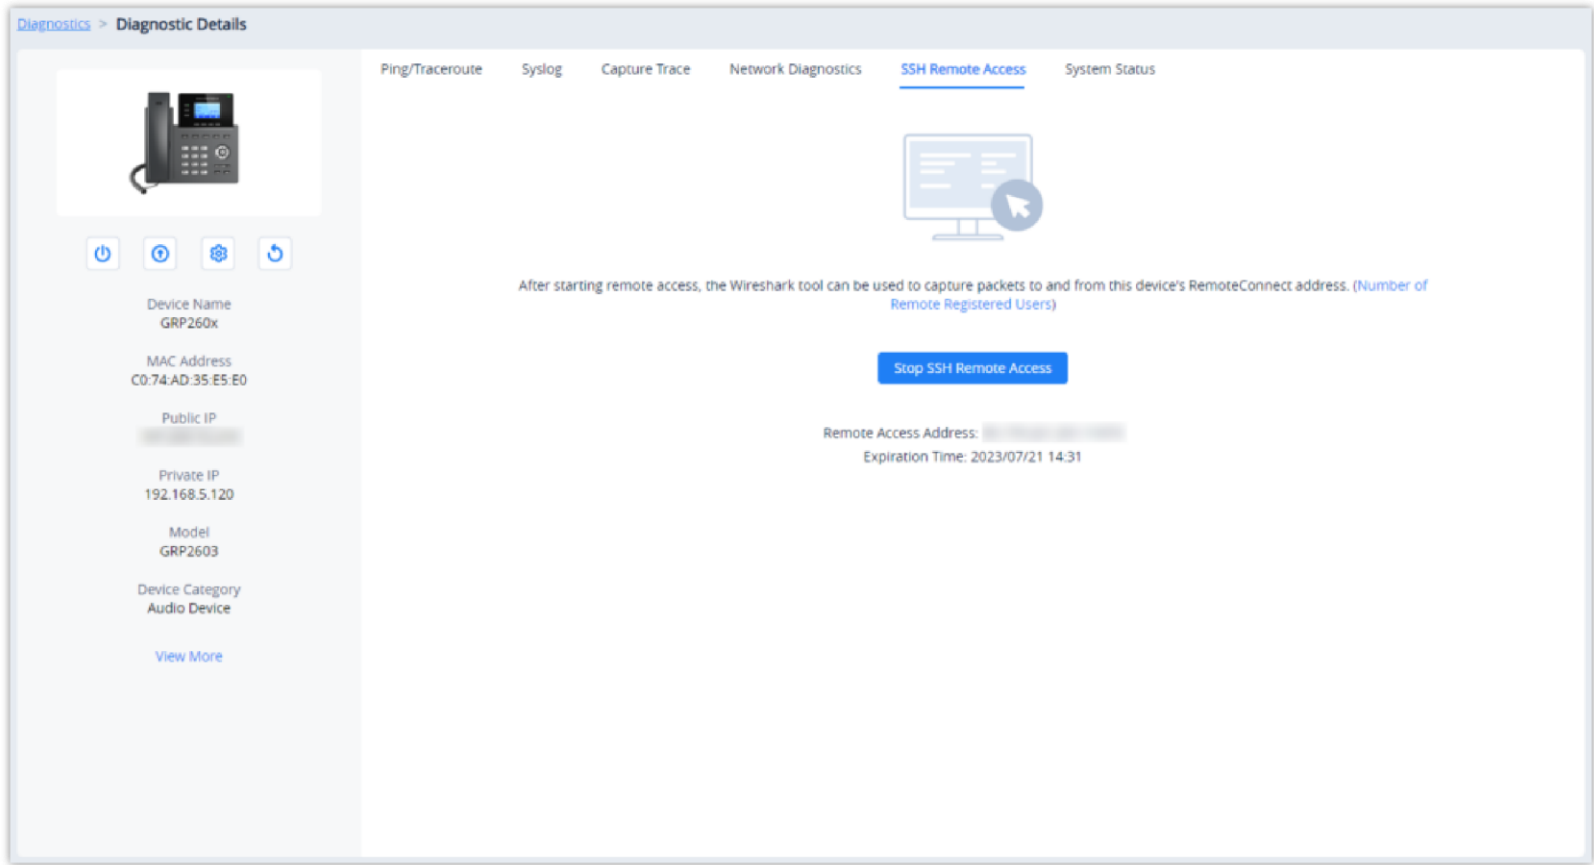


SSH Remote Capture Enabled

After enabling Remote SSH Capture, a Remote Access Address will be displayed, the user can use the Remote Access Address to capture the ethernet packets using a packet analyzer like Wireshark. For more information, refer to the following chapter: <https://documentation.grandstream.com/knowledge-base/grp260x-series-administration-guide/#remote-ssh-capture>

System Status

Users can view the system status of a specific device through the GDMS platform to diagnose the device problems, including storage space, CPU, memory information, etc.

1. Click the “**Start to Get**” button to get the system status from the device in real time.

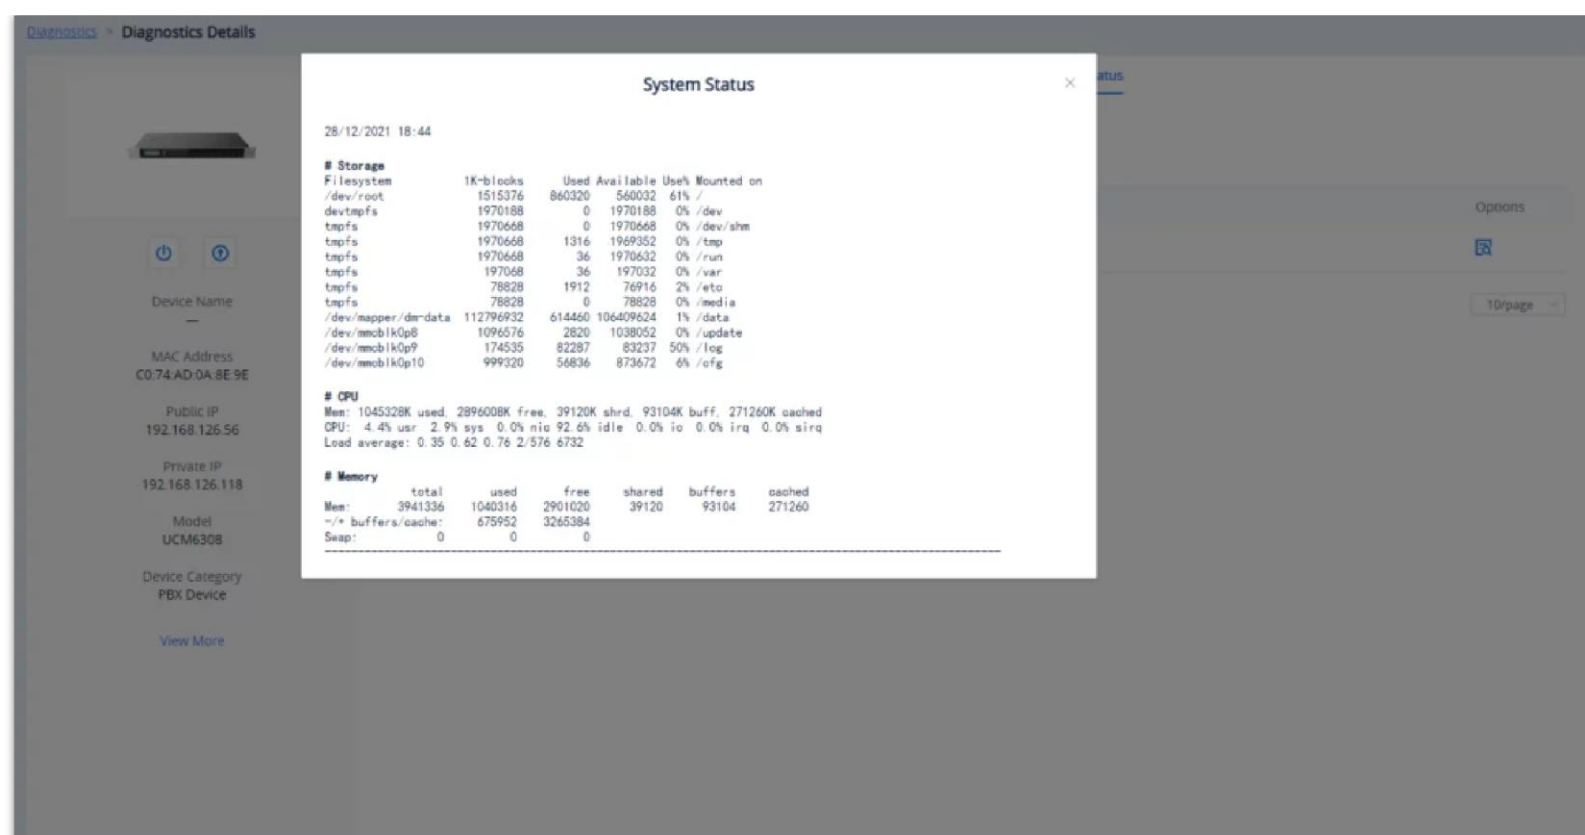

System Status

End Diagnostics

Click on the **End Capture** button on the **Device Diagnostics** page to end diagnostics for the device. All diagnostic processes will stop.

- Since GDMS does not allow multiple users to diagnose the same device simultaneously, please make sure that a diagnosis is properly ended by clicking on the End Diagnostics button.

Diagnostics Records

Users can view the entire diagnostic history of all devices associated with the current account.

Diagnostics							
Diagnostics		* MAC Address		Start Diagnostics			
Diagnosis Activity		Delete		Enter MAC/Device Name/User			
☐	Time	MAC Address	Device Name	Model	User	Diagnostic Status	Options
☐	2019/08/30 11:17	00:0B:82:E2:08:D8	—	GXV3370	yxxu	Diagnosing	
☐	2019/08/27 09:47	00:0B:82:FA:E5:52	—	GXP2140	yxxusub	Diagnosing	
☐	2019/08/27 09:42	00:0B:82:FA:E5:52	—	GXP2140	yxxu	Completed	
☐	2019/08/27 09:41	00:0B:82:F9:E0:F4	—	HT812	yxxu	Diagnosing	
☐	2019/08/27 09:40	00:0B:82:F9:E0:F4	—	HT812	yxxu	Completed	
☐	2019/08/27 09:38	00:0B:82:ED:62:2A	—	WP820	yxxu	Diagnosing	
☐	2019/08/26 18:13	00:0B:82:ED:62:2A	—	WP820	yxxu	Completed	
☐	2019/08/26 17:39	00:0B:82:D3:97:64	9764-wp820	WP820	yxxu	Completed	
Total 8				1		10/page	

Diagnostics Records

1. If a device is currently being diagnosed, click on the



button to continue diagnosing or the



button to end it.

2. If a device has been diagnosed already, click on the



button to start another round of diagnosis or the



button to view the results.

3. View the diagnostic history of a specific device by using the search bar on the top right of the **Diagnostic Records** page.
4. Users can delete records by selecting one or more items and clicking on the **Delete** button.

SYSTEM

Alerts

GDMS has an alert system that will trigger when certain conditions are fulfilled. There are 3 alert levels: High, Medium, and Low.

Alert Notification Settings

Users can view and receive alert notifications in two ways: **Message Notification** and **Email Notification**.

Message Notification Settings

This displays the alert as a notification under the  icon in the top right corner of the GDMS page.

1. To manage message alert notifications, click on the **Message Notification Settings** button

Message Notification Settings

on the top-right corner of the **Alert Management** page.

Message Notification Settings

Organization

Default

Subscriber

emea_test

Notification time

All day

Custom

9 : 0 AM — 6 : 0 PM

+ Add Time

Alert Details

VoIP

UCM

☒	Alert Details
☒	 Account Registration Failed
☒	 Factory Reset
☒	 Reboot Device
☒	 Failed to run task Select Task Reboot Device Factory Reset Upgrade Firmware Update Config: Model

Cancel Save

Organization	Select the organization in question.
Subscriber	Select the users that will be alerted. Only sub-users created by the current user can be selected. The administrator can also add email addresses as subscribers instead of selecting the user account. This is a convenient feature when the email address is not linked to any GDMS user.
Notification Time	Set the time for sending notifications. Only alerts that are generated during this time period will be sent as notifications.
VoIP	
Alert Details	High Level: Account Registration Failed Medium Level: Factory Reset Reboot Device Failed to Run Task Device Offline

Alert Details	High Level: • Local Disk Usage • Abnormal System Reboot • Fail2ban Blocking • SIP Peer Trunk Status • SIP Trunk Registration Status • Configuration Recovery (Backup Restore) • Remote Login • High-frequency outbound call • Outbound trunk call duration usage • Outgoing call duration limit has been reached
	Meduim Level: • Failed to run task, Select the task: Reboot Device, Upgrade Firmwate • Modify Super Admin Password • System Upgrade • User Login Banned


Message Notification Settings

 If a scheduled task fails to run, the alert notification will be sent only to the task creator.

2. When there are unread alerts, and a user subscribed to alerts logs in, the



icon will shake. Hovering over the icon will show the unread messages. Clicking on these messages will show more details about the alerts.

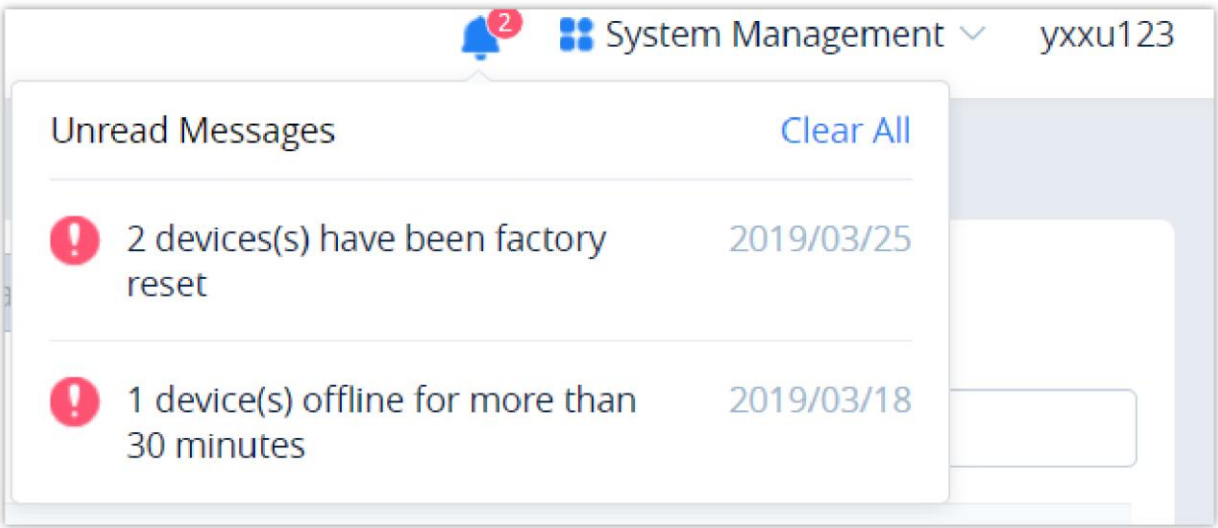


Unread Message Icon

Email Notification Settings

Alerts will be sent as emails to subscribers. The subscribers chosen can either be a GDMS sub-user or the administrator can directly enter an email address as a subscriber, please see the figure below.

1. To manage email alert notifications, click on the



button on the top-right corner of the **Alert Management** page.

Email Notification Settings

Please ensure the PBX device has enabled the corresponding alert options and purchased UCMRC advanced plan.

Organization

Custom AAA

Subscriber

Admin

Notification time

Alert Details

+ Add Email

☒

!

PBX cloud storage space is insufficient or full

☒

!

CPU Traffic Control

☒

!

Local Disk Usage

☒

!

Memory Usage

☒

!

Abnormal System Reboot

Cancel

Save

Email Notification Settings

Organization	Select the organization in question.
Subscriber	Select the users that will be alerted. Only sub-users created by the current user can be selected. The administrator can also add email addresses as subscribers instead of selecting the user account. This is a convenient feature when the email address is not linked to any GDMS user.
Notification Time	Set the time for sending notifications. Only alerts that are generated during this time period will be sent as notifications.
VoIP	
Alert Details	High Level: - Account Registration Failed Medium Level: - Factory Reset - Reboot Device - Failed to Run Task - Device Offline
PBX	
Alert Details	Users can specify what alerts to receive. The following alert priority levels are available: High Level: - Device is back online - Device Offline

	● UCM cloud storage space is insufficient or full ● CPU Traffic Control ● Local Disk Usage ● Memory Usage ● Abnormal System Reboot ● System Crash ● Fail2ban Blocking ● SIP Peer Trunk Status ● Network Disk Status ● Remote Concurrent Calls Amount Exceeds Upper Limit ● External Disk Usage ● TLS Certificate Expired ● Remote Login ● Network Port Traffic Alert ● High-frequency Outbound Call ● Flood Attack ● Outbound Trunk Call Duration Usage ● Outgoing Call Duration Limit Has been Reached Medium Level: ● Failed to Run Task ● Modify Super Admin Password ● System Upgrade ● User Login Banned Note: Only the IPPBX devices that have UCM RemoteConnect advanced plans can report the alert contents and send the alert notifications.
CloudUCM	
Alert Details	High Level: ● Local Disk Usage ● Abnormal System Reboot ● Fail2ban Blocking ● SIP Peer Trunk Status ● SIP Trunk Registration Status ● Configuration Recovery (Backup Restore) ● Remote Login ● High-frequency outbound call ● Outbound trunk call duration usage ● Outgoing call duration limit has been reached Meduim Level: ● Failed to run task, Select the task: Reboot Device, Upgrade Firmwate ● Modify Super Admin Password ● System Upgrade ● User Login Banned

Email Notification Settings

 If a scheduled task fails to run, the alert notification will be sent only to the task creator.

2. When the subscriber receives the alarm notification, the GDMS platform will send an email to inform the subscriber. To avoid the alarm notification emails disturbing the subscriber, the GDMS platform only can send one alarm notification email to the subscriber’s email box per hour.

Hi, [Redacted]

GDMS currently has **2** unread alert(s). Please check your notifications. [Click here for details:](#)

Alert Details	Alert Type	Level	Date
Device GXV3370_Test (00:0B:82:E9:A1:08) registration failed	Device Registration Failed	High	2019/03/25 00:29
Device GXV3370_Test (00:0B:82:E9:A1:08) Factory Reset	Factory Reset	Medium	2019/03/25 00:28

This is an automatically generated email. Please do not reply.

[About Us](#) | [Contact Us](#)

Copyright © 2019 Grandstream Networks, Inc. All rights reserved.

Email Alert Notification

App Notification Settings

The alerts can be pushed to the subscribers through the App notifications.

1. The user can click the button

[APP Notification Settings](#)

to access the App notification settings interface.

App Notification Settings

Organization
Default

Subscriber
emea_test

Notification time
All day
Custom
9 : 00 AM — 6 : 00 PM
Add Time

Alert Details
VoIP
UCM

☒	Alert Details
☒	Account Registration Failed
☒	Factory Reset
☒	Reboot Device
☒	Failed to run task
	Select Task Reboot Device Factory Reset Upgrade Firmware Update Config: Model

Cancel
Save

App Notification Settings

Organization	Select the organization in question.
Subscriber	Select the users that will be alerted. Only sub-users created by the current user can be selected. The administrator can also add email addresses as subscribers instead of selecting the user account. This is a convenient feature when the email address is not linked to any GDMS user.
Notification Time	Set the time for sending notifications. Only alerts that are generated during this time period will be sent as notifications.
VoIP	
Alert Details	High Level: - Account Registration Failed Medium Level: - Factory Reset - Reboot Device - Failed to Run Task - Device Offline
PBX	
Alert Details	Users can specify what alerts to receive. The following alert priority levels are available: High Level: - Device is back online - Device Offline - UCM cloud storage space is insufficient or full - CPU Traffic Control - Local Disk Usage - Memory Usage - Abnormal System Reboot - System Crash - Fail2ban Blocking - SIP Peer Trunk Status - Network Disk Status - Remote Concurrent Calls Amount Exceeds Upper Limit - External Disk Usage - TLS Certificate Expired - Remote Login - Network Port Traffic Alert - High-frequency Outbound Call - Flood Attack - Outbound Trunk Call Duration Usage - Outgoing Call Duration Limit Has been Reached Medium Level: - Failed to Run Task - Modify Super Admin Password - System Upgrade - User Login Banned Note: Only the IPPBX devices that have UCM RemoteConnect advanced plans can report the alert contents and send the alert notifications.
CloudUCM	
Alert Details	High Level: Local Disk Usage

- Abnormal System Reboot
- Fail2ban Blocking
- SIP Peer Trunk Status
- SIP Trunk Registration Status
- Configuration Recovery (Backup Restore)
- Remote Login
- High-frequency outbound call
- Outbound trunk call duration usage
- Outgoing call duration limit has been reached

Meduim Level:

- Failed to run task, Select the task: Reboot Device, Upgrade Firmwate
- Modify Super Admin Password
- System Upgrade
- User Login Banned

App Notification Settings

Message Notification Settings

IPPBX devices that have a UCM RemoteConnect service plan can use the SMS Notification function. This function is only supported by some of the UCM RemoteConnect plans.

1. To manage email alert notifications, click on the

Message Notification Settings

button on the top-right corner of the **Alert Management** page.

Message Notification Settings

Organization

Default

Subscriber

EMEA_Test

Notification time

☒ All day
 ☐ Custom

Alert Details

VoIP

PBX

CloudUCM

☒	Alert Details
☒	Account Registration Failed
☒	Factory Reset
☒	Reboot Device
☒	Failed to run task Select Task Reboot Device Factory Reset Upgrade Firmware Update Config: Model Update Config: Group

Cancel

Save

Message Notification Settings

Organization	Select the organization in question.
Subscriber	Select the users that will be alerted. Only sub-users created by the current user can be selected. The administrator can also add email addresses as subscribers instead of selecting the user account. This is a convenient feature when the email address is not linked to any GDMS user.
Notification Time	Set the time for sending notifications. Only alerts that are generated during this time period will be sent as notifications.
VoIP	
Alert Details	High Level: - Account Registration Failed Medium Level: - Factory Reset - Reboot Device - Failed to Run Task - Device Offline
PBX	
Alert Details	Users can specify what alerts to receive. The following alert priority levels are available: High Level: - Device is back online - Device Offline - UCM cloud storage space is insufficient or full - CPU Traffic Control - Local Disk Usage - Memory Usage - Abnormal System Reboot - System Crash - Fail2ban Blocking - SIP Peer Trunk Status - Network Disk Status - Remote Concurrent Calls Amount Exceeds Upper Limit - External Disk Usage - TLS Certificate Expired - Remote Login - Network Port Traffic Alert - High-frequency Outbound Call - Flood Attack - Outbound Trunk Call Duration Usage - Outgoing Call Duration Limit Has been Reached Medium Level: - Failed to Run Task - Modify Super Admin Password - System Upgrade - User Login Banned Note: Only the IPPBX devices that have UCM RemoteConnect advanced plans can report the alert contents and send the alert notifications.
CloudUCM	
Alert Details	High Level: Local Disk Usage

	● Abnormal System Reboot ● Fail2ban Blocking ● SIP Peer Trunk Status ● SIP Trunk Registration Status ● Configuration Recovery (Backup Restore) ● Remote Login ● High-frequency outbound call ● Outbound trunk call duration usage ● Outgoing call duration limit has been reached Meduim Level: ● Failed to run task, Select the task: Reboot Device, Upgrade Firmwate ● Modify Super Admin Password ● System Upgrade ● User Login Banned
--	---


Notification Settings

2. Click the **Save** button to apply the changes.

View Alert Notification


The **Alert Management** page shows all alerts that have been generated by GDMS.

i Users can be limited by their privileges on the alerts they can view on the Alert Management page. Please refer to the User Management section for more details.

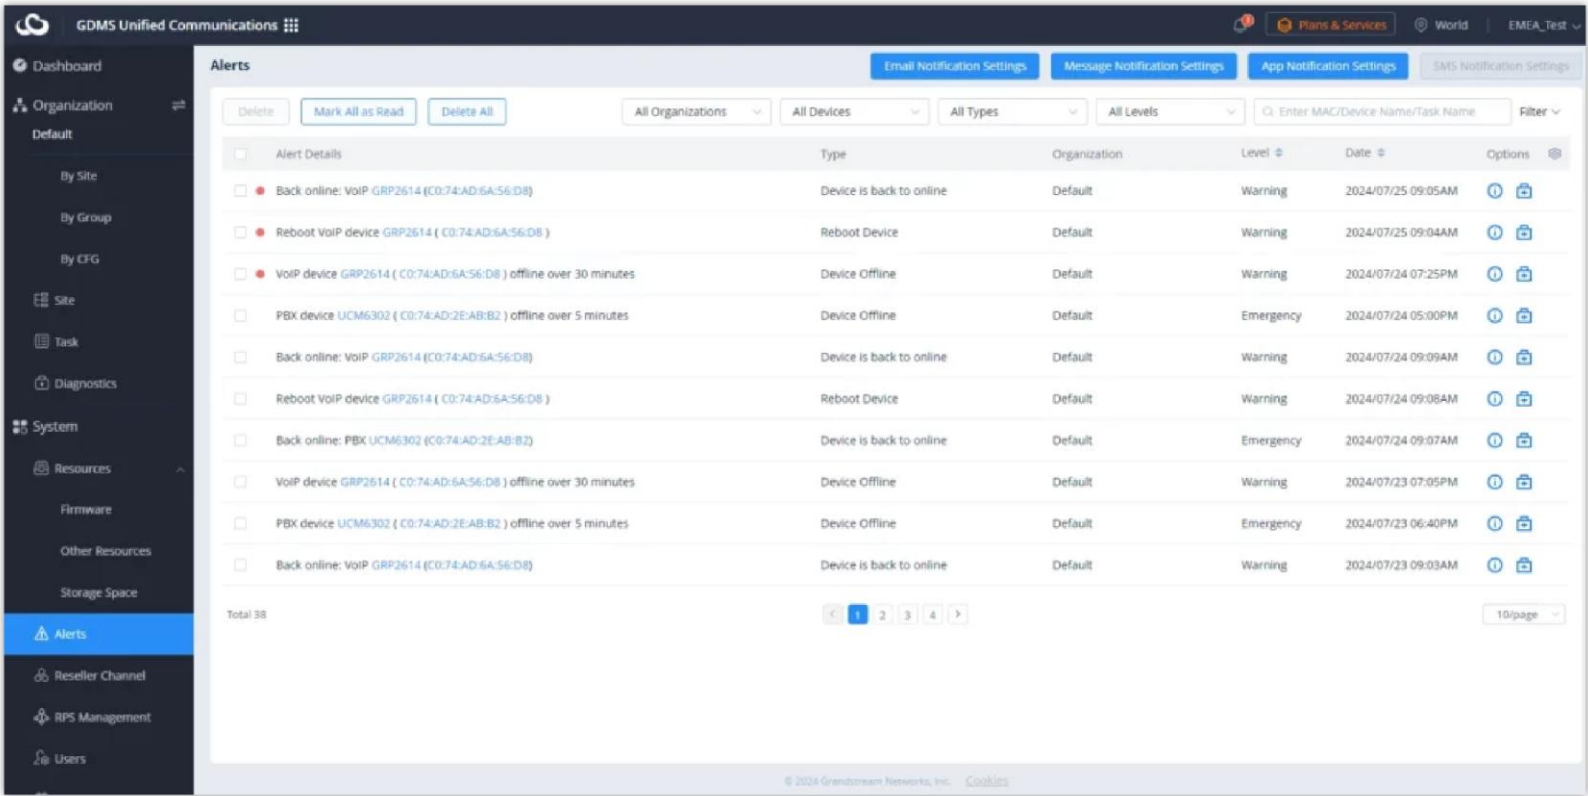

View Alert Notification

- **Search:** Users can find specific alerts by using the filter and search features in the top right corner of the **Alert Management** page.
- **Latest alarm notification:** If the alarm notification includes a red dot at the beginning of the item, it means the alarm notification is unread. Users could click on the button



to mark all unread notifications as “Read.”

- **View Details:** Users could click on the button




following the alert notification to view the alert notification details, and the red dot will disappear if the user has viewed the alert notification details.

Note: When you click on



, the following information will appear.

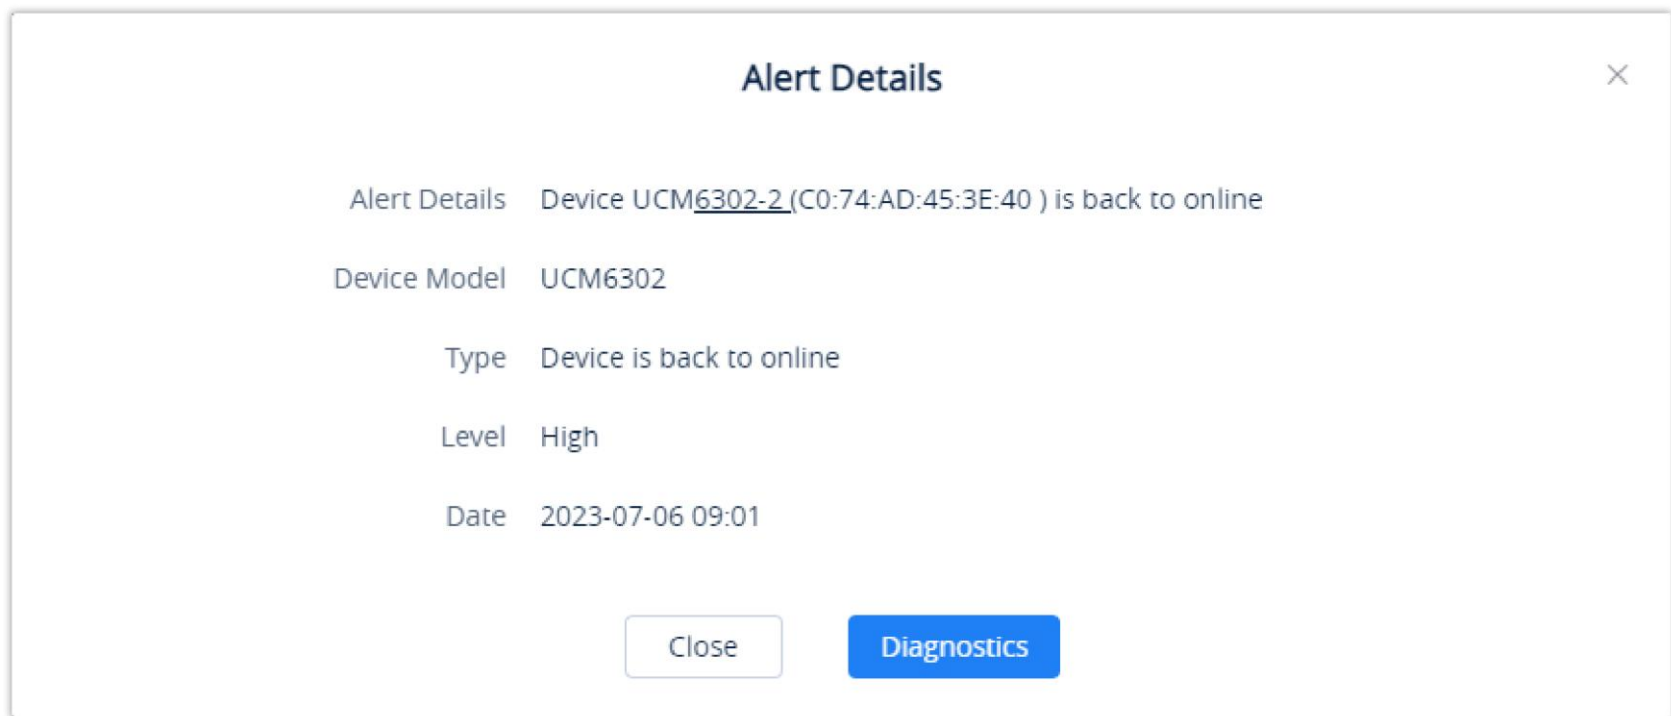

Device Alert Details

- **Device Diagnostics:** For the device that has a fault, the user could click on the option




to access the **Device Diagnostics** page to diagnose the device.

- **Delete Alerts:** Users can delete notifications by selecting one or more items and clicking on the **Delete** button.
- To display the device that has generated the event, the user can click on the hyperlinked MAC address to view more information about the device.


Region Management

The user can switch between the available regions which are available on the GDMS platform. Currently, we support the US region and the EU region. The user can enable both regions at the same time if they wish to, to do that please access the region configuration window by clicking your region name on the upper right corner of the GDMS web UI.

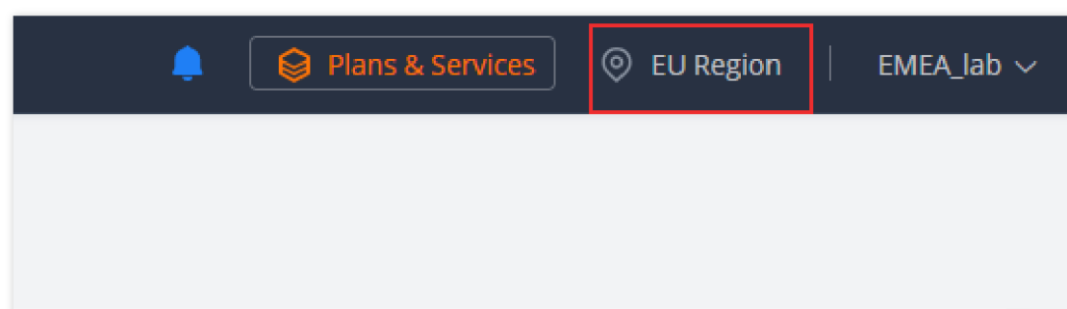


GDMS Region

Select the region you would like to switch to. Or, to configure a new region, please click on "Region Settings"

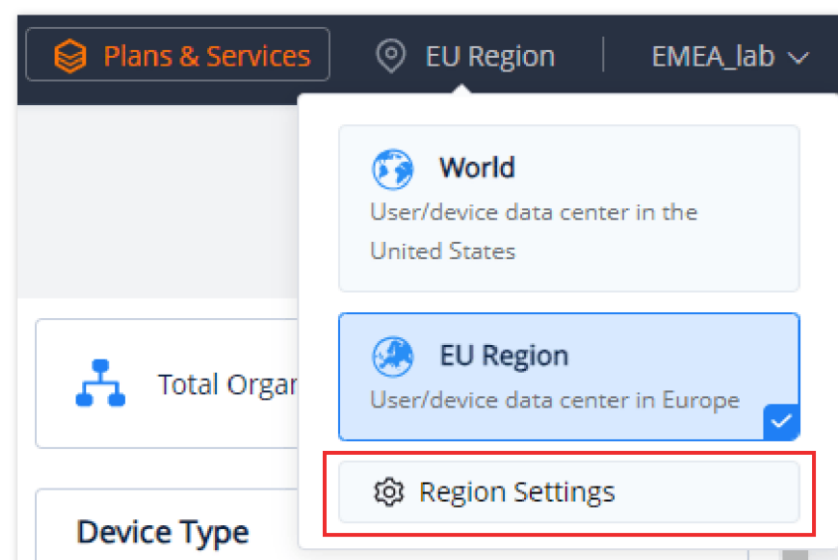


Region Settings

You can either delete or add a region.

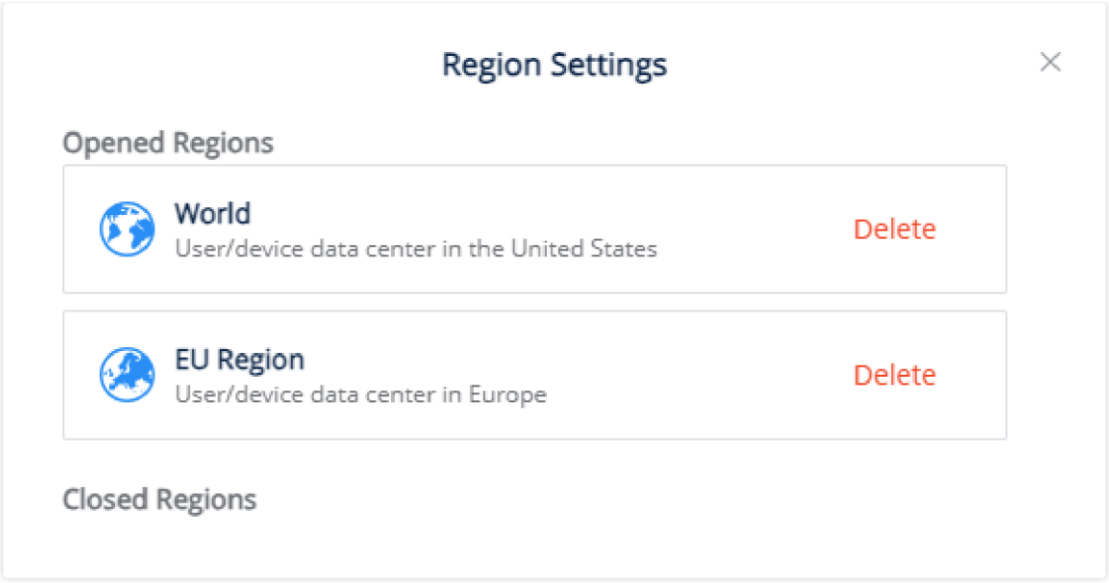

DeleteAdd Region

Enter the password of the administrator to be able to add or delete a region.

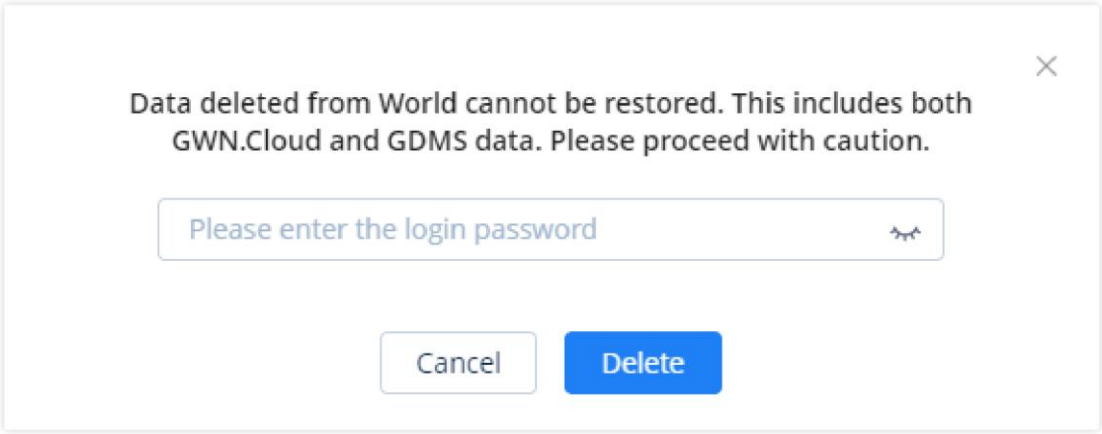

Enter Password

 **Caution**

Deleting a region will result in the loss of data of that region, please proceed with caution.

 **Note**

By default, only the main administrator can delete or add a region.

Resources

Firmware

Custom Firmware

Users could upload the firmware of the devices to upgrade the associated devices on the GDMS platform.

 It is recommended to download the device’s firmware from the Grandstream Official website to avoid device failure.

1. On the Custom Firmware page, click on the Upload Firmware button.
2. Either drag and drop the firmware file to the upload area or enter the firmware file path.

Firmware > Upload Firmware

Upload Method

Upload File

File Path

Upload File

Click or drag and drop file here to upload

Only .bin files are supported. File size cannot exceed 2GB

Firmware Name

Enter firmware name (up to 64 characters)

Version Number

Enter version number (up to 64 characters)

Supported Models

Select

Description

Enter description (up to 256 characters)

Cancel

Save

Custom Firmware

Upgrade Path	Upload File: Upload the firmware file directly. Users could drag the firmware file to the uploading area or click on the uploading area to select the uploading firmware. Enter File Path: File path of the firmware. Please make sure that this file path can be accessed by your devices.
Firmware Name	This is used to identify the firmware file name. The limit is 1 – 64 characters.
Version Number	Fill in the actual version number of the uploaded firmware.
Supported Model	Select the supported device models of the firmware.
Description	Description of the firmware. The maximum character limit is 256.

Custom Firmware

3. Once the firmware is uploaded successfully, it will appear in the custom firmware list. Devices will be able to select the firmware when upgrading via GDMS.

Firmware > Upload Firmware

Upload Method

Upload File

File Path

Upload File

Click or drag and drop file here to upload

Only .bin files are supported. File size cannot exceed 2GB

Firmware Name

Enter firmware name (up to 64 characters)

Version Number

Enter version number (up to 64 characters)

Supported Models

Select

Description

Enter description (up to 256 characters)


Cancel

Save

Finish Uploading Custom Firmware

Official Firmware

The official firmware page lists the latest official firmware for every supported device. This list is maintained and updated by Grandstream.

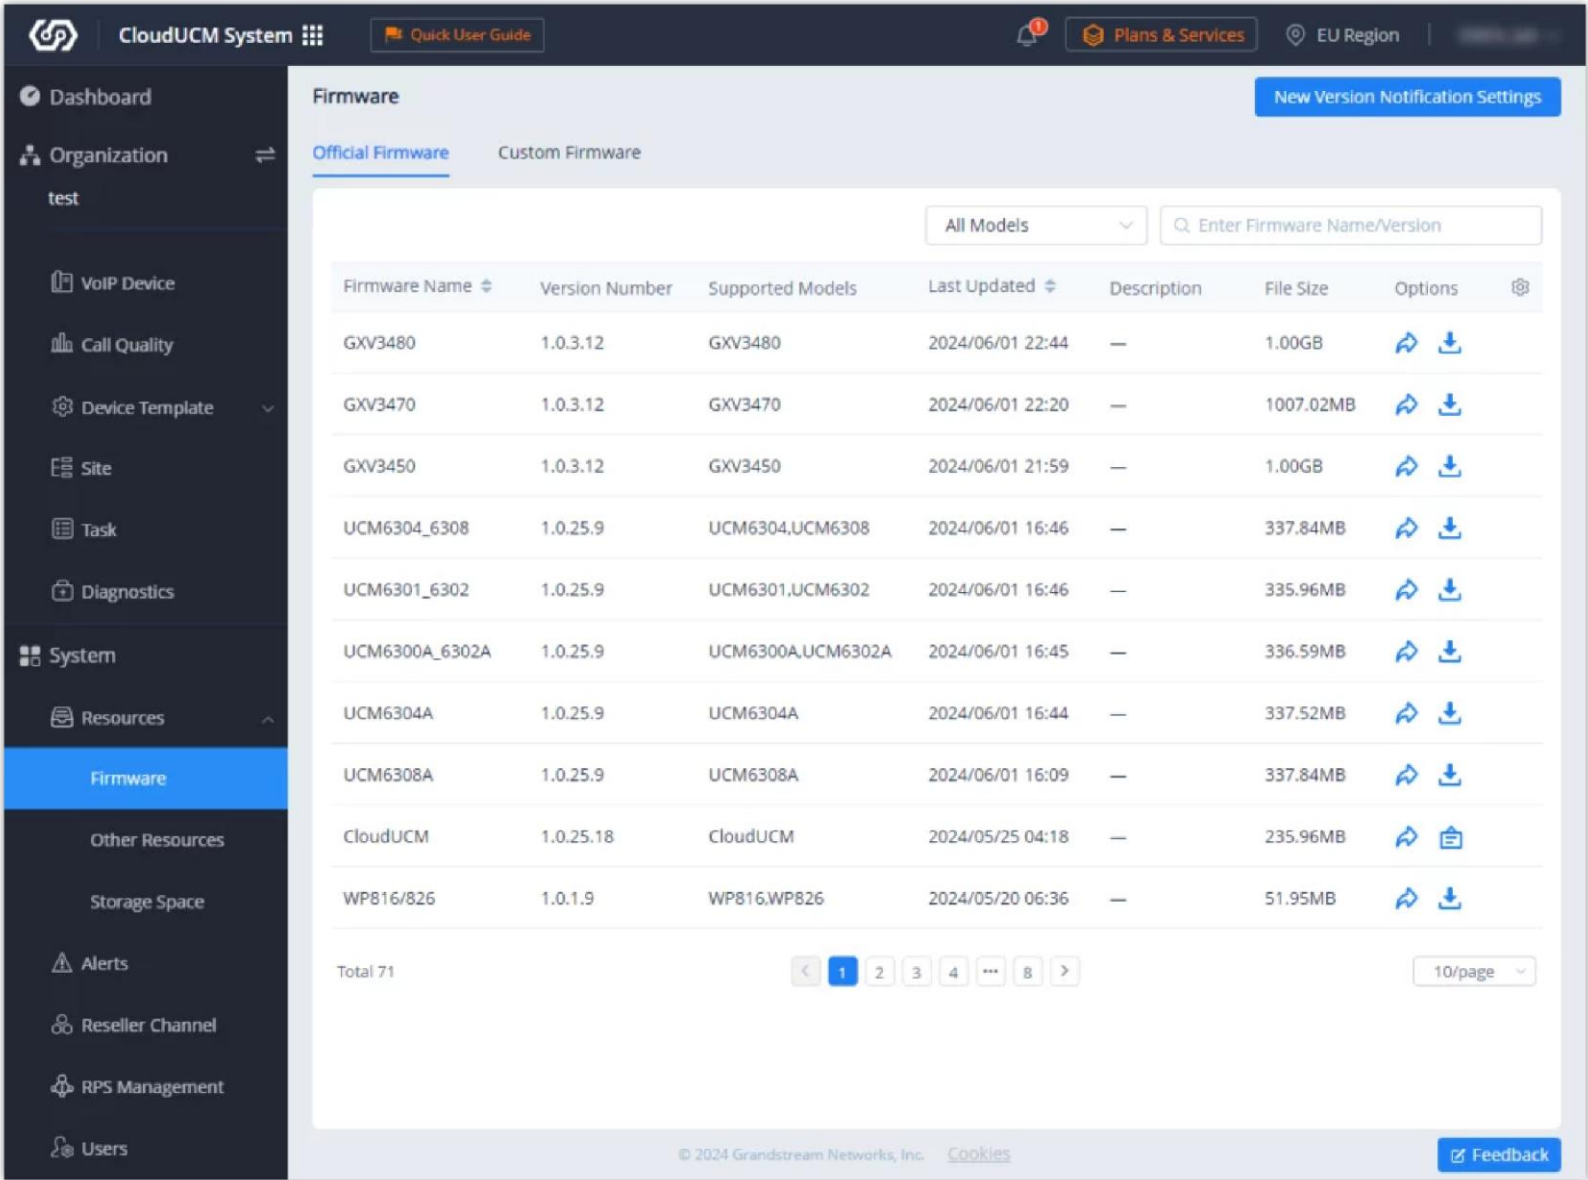


Official Firmware

Official firmware cannot be edited or deleted, and users can only download or push the firmware to upgrade the devices.

Firmware Update Notification Settings

Users can subscribe to firmware update email notifications to keep up to date with the latest firmware releases.

- 1. Click on the **New Version Notification Settings** button at the top of the **Firmware** page.

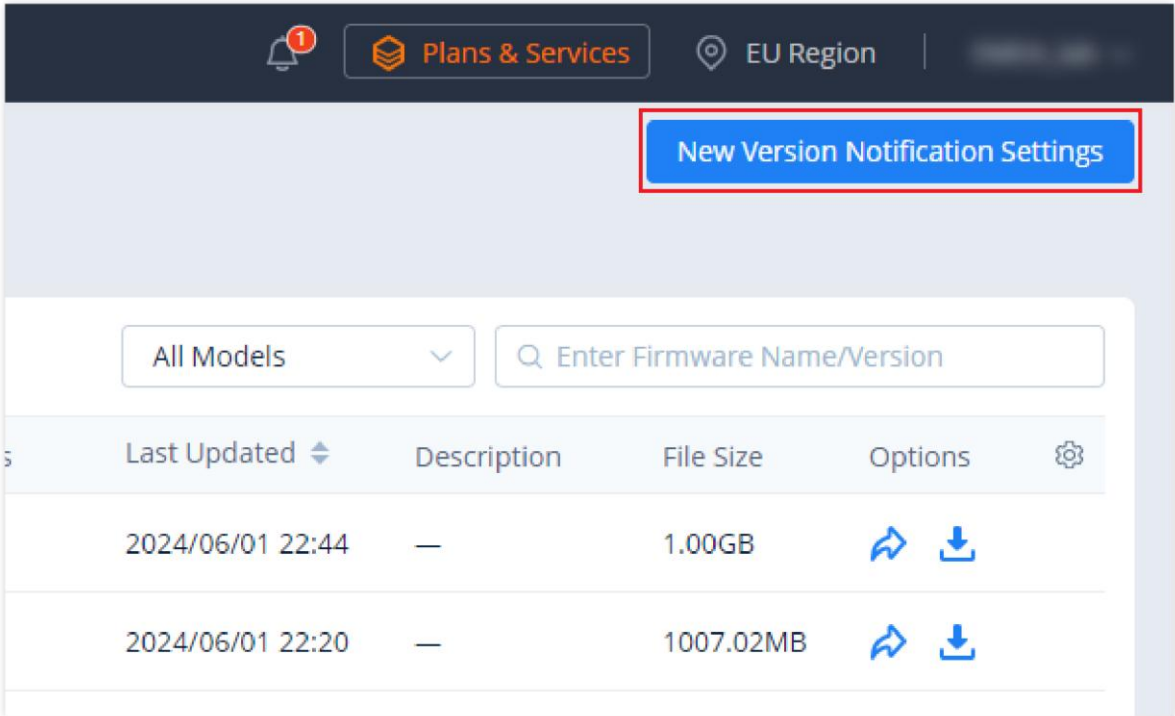

Official Firmware

- 2. The following page will appear, on which you can choose which products to receive notifications when new firmware is released.

New Version Notification Settings

When a new firmware is available for the selected models, the system will send an email to you:

☐	Model
☐	CloudUCM
☐	DP755
☐	DP750
☐	DP752
☐	GAC2570
☐	GCC6010
☐	GDS3702
☐	GDS3705
☐	GDS3710
☐	GDS3712
☐	GHP610
☐	GHP611

Cancel

Save

Firmware Update Notification Settings

3. Users can select the device models they want firmware update notifications for.
4. Click on the **Save** button to finalize changes.

Push Firmware Update

Using this feature, the user can push firmware updates to the devices directly; this can be performed for devices with various firmware version numbers, or if the user wants to upgrade devices that have a specific firmware version number, the user will be able to specify that version number or specify a range of firmware versions to be upgraded.

1. Click on the



button for the desired firmware. The following window will appear:

Push Firmware Update

* Task Time

☒ Immediate

☐ Scheduled

☐ Permanent

* Current Firmware Range

All Versions

* Target Device(s)

☒ All devices of this model

☐ Select Devices

☐ Enter MAC Address

Includes devices added in the future

Select Corresponding Organizations

Select Device Model

Cancel

Save

Push Firmware Upgrade

2. Select the devices to push the firmware to. Users can search for specific devices by entering a MAC address or name or filter devices by specific sites.
3. Click on **Update Now** to immediately push the firmware upgrade to devices or **Schedule Config Update**.
4. Click on the **Save** button to create the task. Users can check the status of the firmware upgrade on the **Task Management** page.

Edit Custom Firmware File Info

Users could edit the custom firmware file name, firmware version, and other information on the GDMS platform. Click on the button  to access the firmware editing page.

 If the firmware file is changed, existing scheduled tasks involving that firmware will still use the original file, not the newly uploaded file.

Download Firmware

Users can download firmware on GDMS by clicking on the  button.

 If a firmware on GDMS is using a configured file path, that path will be used when downloading it.

Delete Custom Firmware

Users can delete custom firmware by selecting them in the firmware list and clicking on the **Delete** button in the top-left corner of the list.


 If the firmware is deleted, scheduled tasks associated with it will continue as normal anyway. Once all associated scheduled tasks are completed, the firmware file will automatically be removed from GDMS

Other Resources Management

Users can upload the resource files (such as ringtone files, wallpapers, language packs, etc.) to the GDMS platform so that users can configure or assign the resource files to devices at any time.

Upload Resource

1. On the **Resource Management** → **Other Resources** page, click on the resource files uploading button.
2. Users can drag or click to upload ringtone files, pictures, language packs, and other files, as the figure shows below:

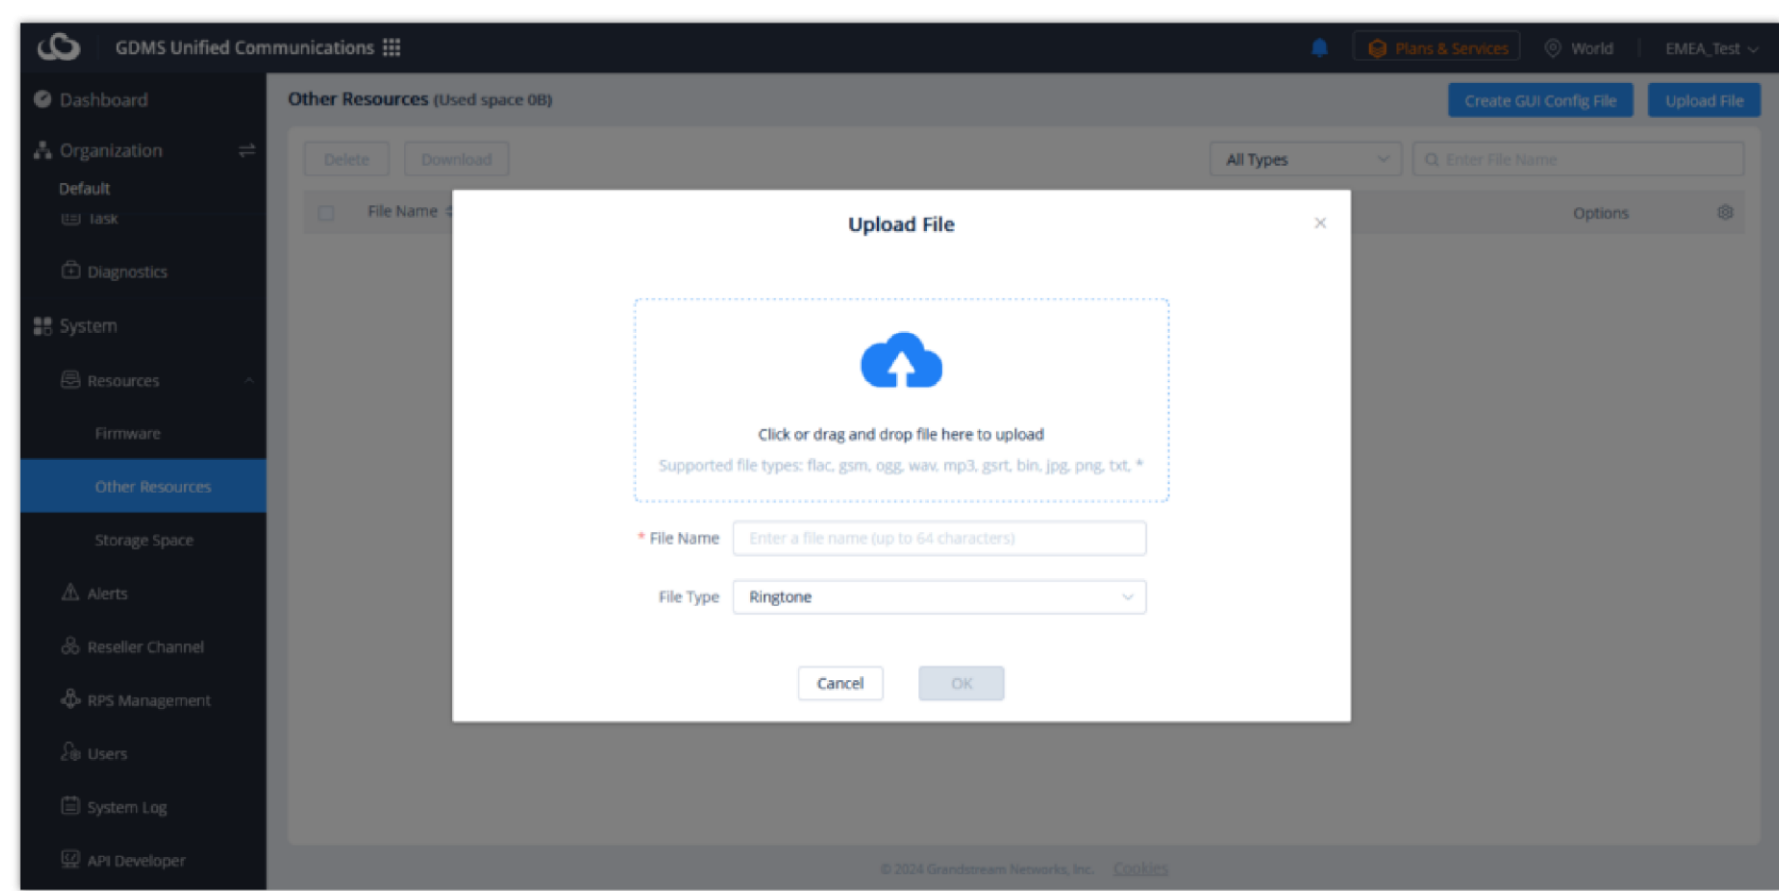

Custom Firmware

File	Users could drag the file to the uploading area or click on the uploading area to select the file. Supported file format: gsrt/flac/gsm/ogg/wav/mp3/jpg/png/txt. If the user selects the file type as “Other,” the GDMS platform will not restrict the file format. File size limit: Bin file/Ringtone – 128KB; Picture/Language pack – 500KB; Other – 5MB.
File Name	This is used to identify the file name. The limit is 1 – 64 characters.
File Type	This is used to identify the file type, such as ringtone, picture, language pack, and Others.

Custom Firmware

3. Click the “OK” button to save the file to the GDMS server.

The user can also choose to edit a file, this allows the user to upload a file and overwrite the existing one.



- When the resource file is uploaded to the GDMS server, users can configure the resource file for the device on the “Set Parameters” page.
- Only some specific models support configuring custom ringtones and language packs, and the supported file sizes are different.
- The new resource files will be loaded after the device is restarted.

View Resource List

Users can view all resources on the **Resource List** under the enterprise, including the uploaded resources.

- 1. Users can go to **Resources → Other Resources** to view the resources list.
- 2. Users can also search the resources by resource type or file name on the resources list.

Other Resources (Used space 319.45KB)

Create GUI Config FileUpload File

DeleteDownload

All Types

Enter File Name

☐	File Name	File Type	File Size	Updated Time	File URL Address	Options
☐	ca-bundle	Other	228.96KB	2022-09-19 12:23	https://eu.gdms.cloud/api/config/resources/do...	
☐	ring2	Ringtone	26.94KB	2021-04-08 15:19	https://eu.gdms.cloud/api/config/resources/do...	
☐	ring1	Ringtone	63.55KB	2021-04-08 15:18	https://eu.gdms.cloud/api/config/resources/do...	

Total 3

<1>

10/page

Other Resources

Copy File URL

1. On **Resource Management → Other Resources** page, click the button



following the resource file to copy the resource URL.

2. Copy the file URL and paste it to another file download path.

Download Resource

1. On **Resource Management → Other Resources** page, click the button



following the resource file to download the resource.

2. Download the resource file locally.

Modify Resource

1. On **Resource Management → Other Resources** page, click the button



following the resource file to modify the resource.

2. Users can modify the file and file name.

If the user wants to re-upload the resource file, the device using this file URL may download and use the new resource file.

Delete Resource

1. On the **Resource Management** → **Other Resources** page, click the button



following the resource file to delete the resource. Users can also select multiple resource files and click the Delete button on the top of the page to batch delete the resource files.


2. When the user confirms to delete the resource file, the selected file will be deleted from the GDMS platform.

i When the file is deleted from the GDMS platform, the device using this file URL still can use the downloaded resource file in the device locally.

GUI Config File


The user can use the GUI Config tool to create a configuration file for a specific model device and store the configuration file in the GDMS storage space.

- On **Other Resources**, please click “Create GUI Config File”

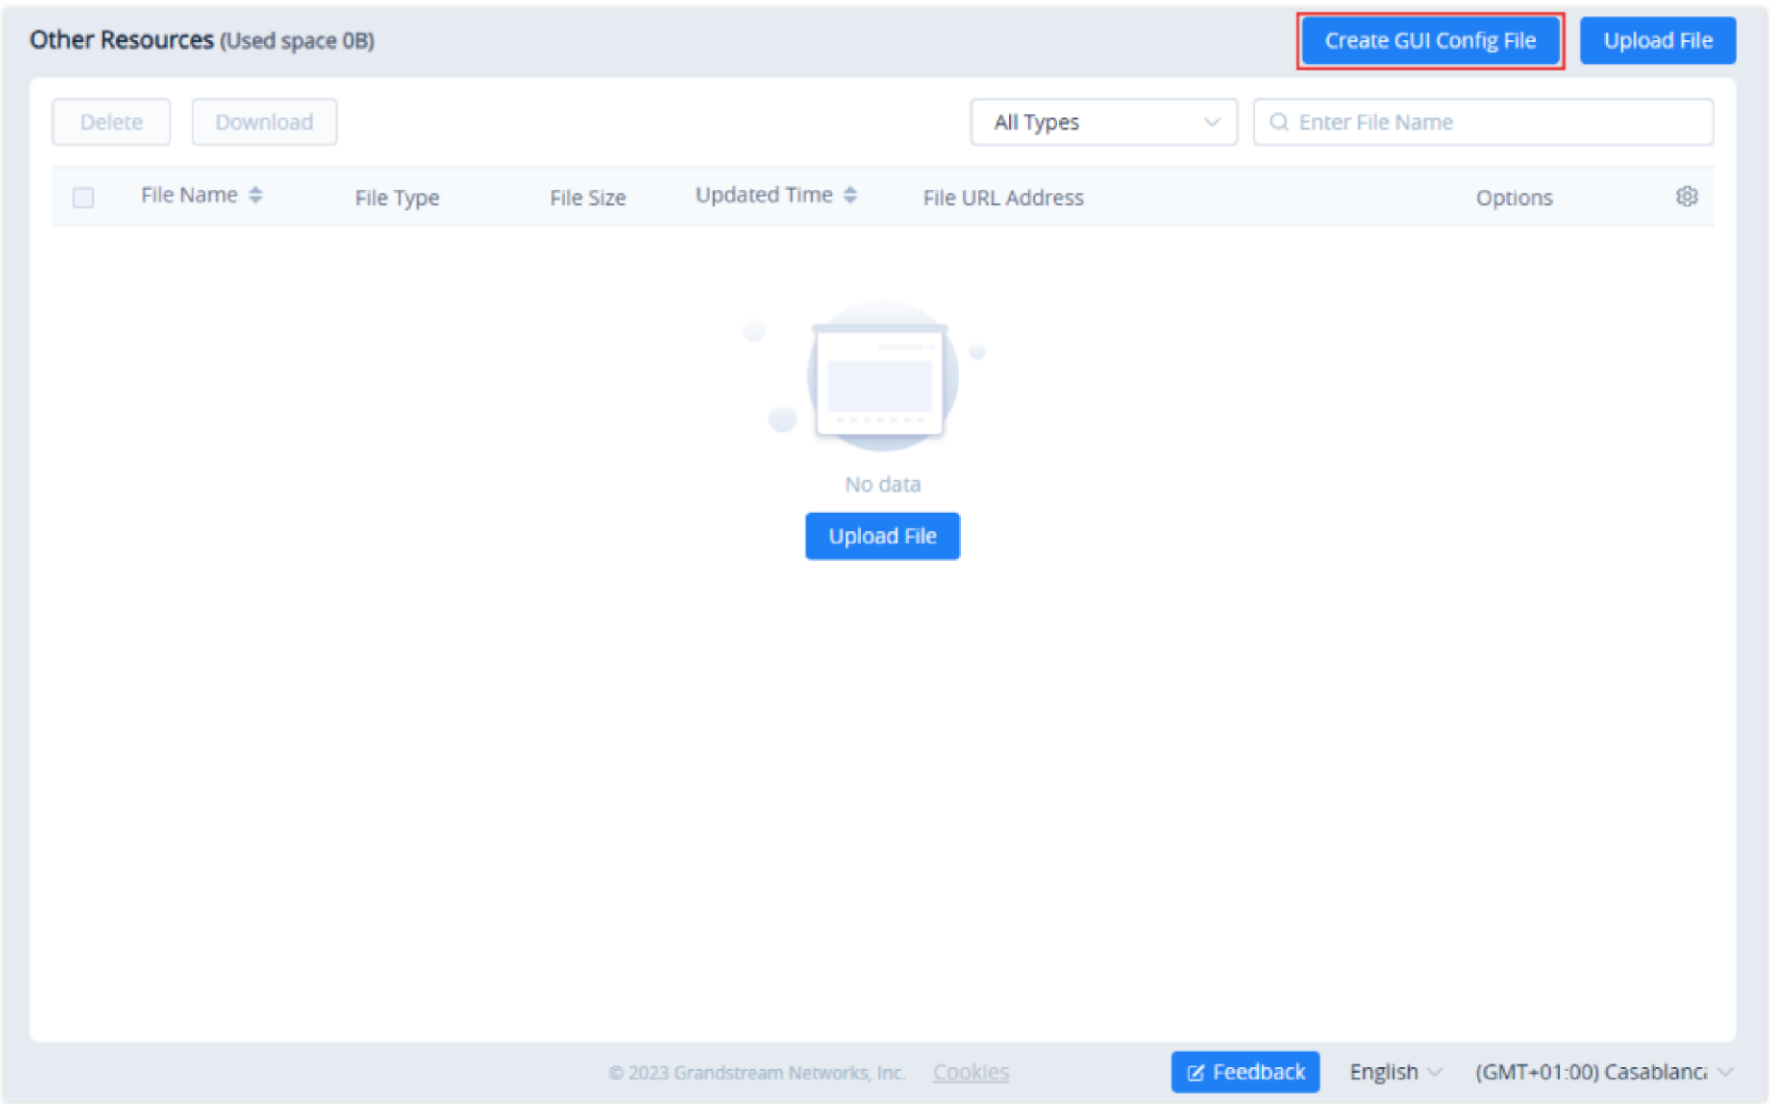


Create GUI Config File

- Choose the model of which you want to create the configuration file.

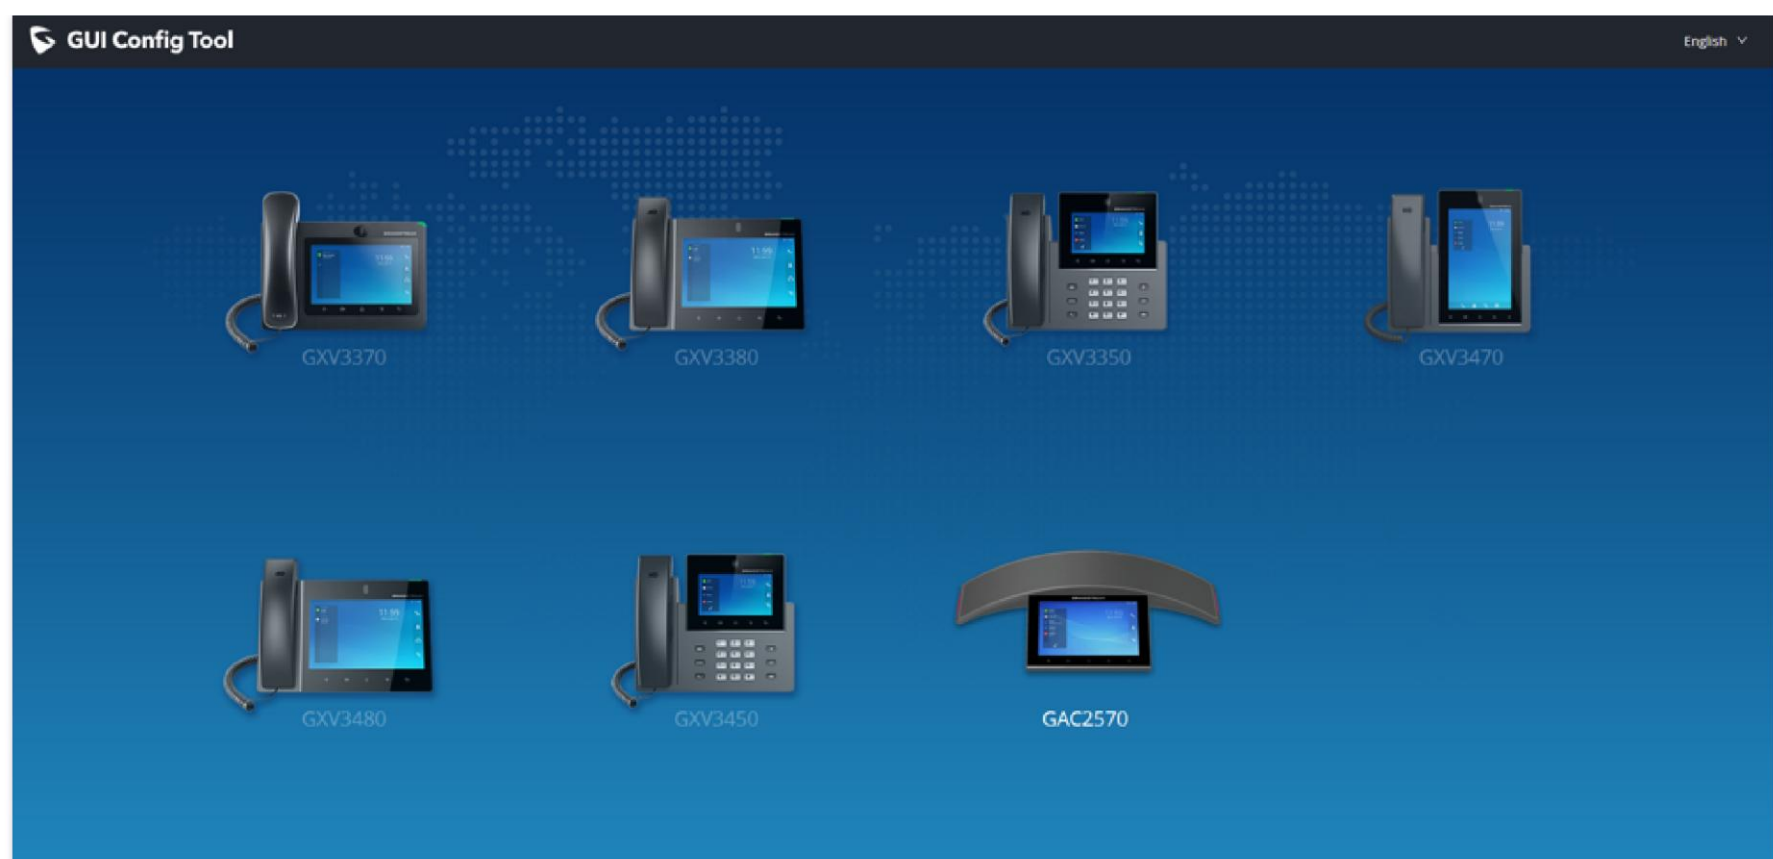

Choose a model

- Once the configuration has been customized, click on "Save to GDMS".

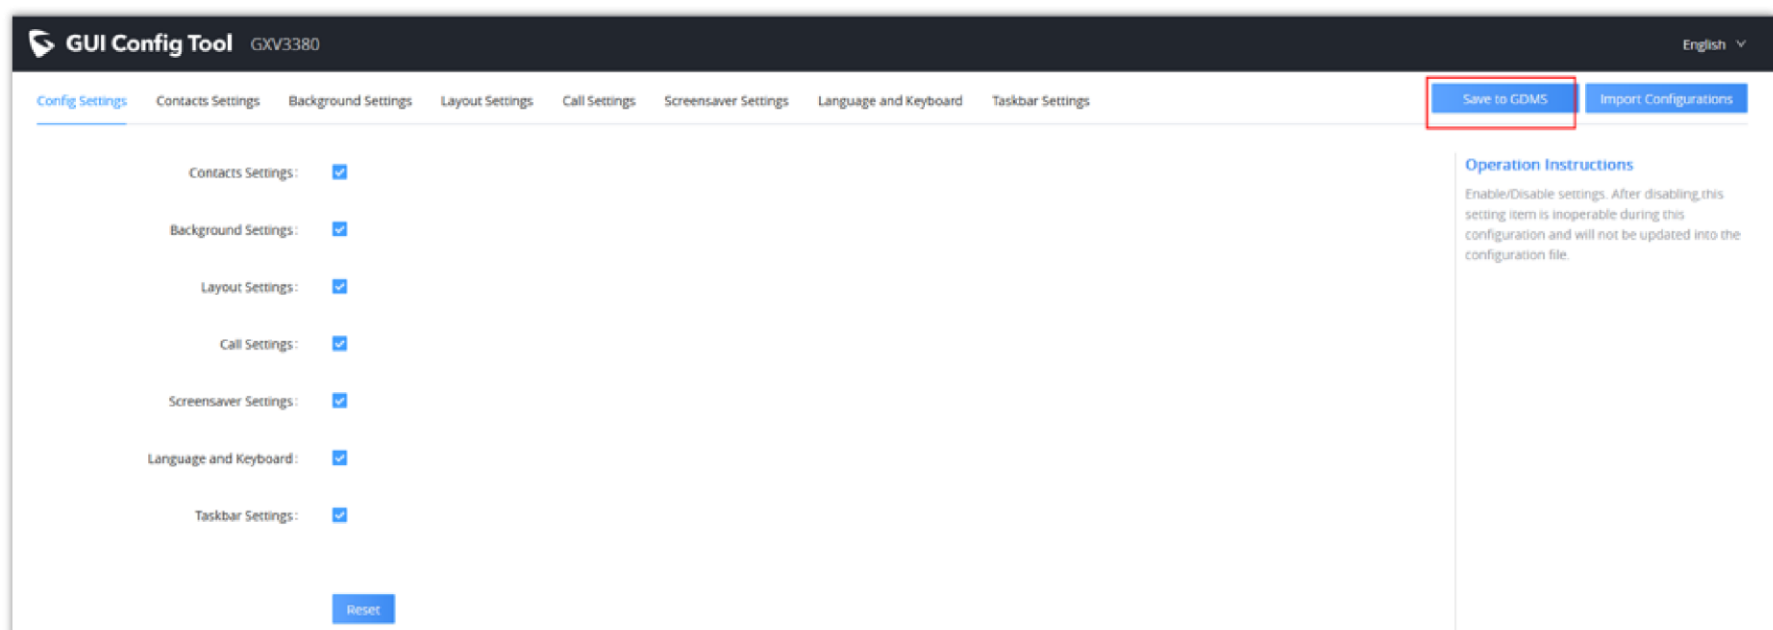


Save to GDMS

View Storage Space

All resource files are stored in the enterprise's storage space. This interface shows the storage space occupied and the total storage space:

- On the "Resource Management" → "Storage Space" interface, go to the **Storage Space** statistics page. This interface shows the storage space taken up by the custom firmware and the other resource files.

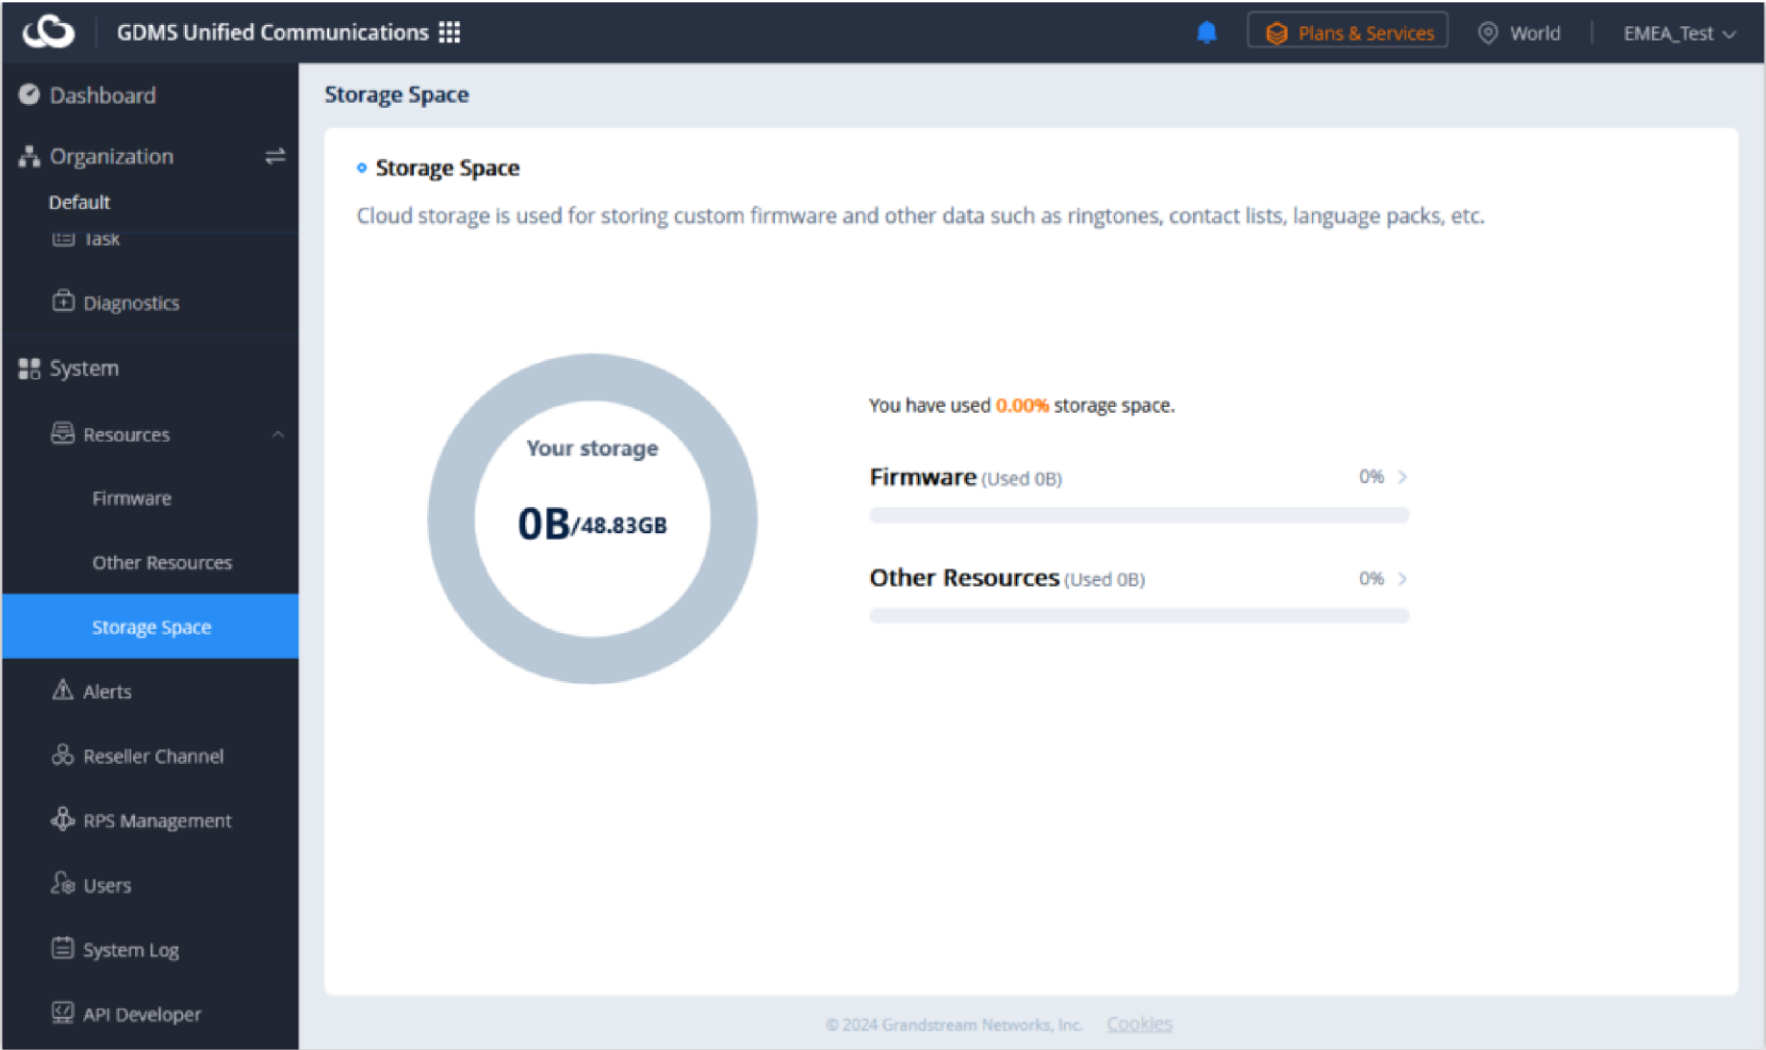

View Storage Space

Note

If the current storage space is less than 10% or full, the user can upgrade the plan or clean up the storage space to get more available storage space.

Default Config File

Default Conf File feature allows the administrator to deploy a default configuration for devices in batches.

Note

To have this option enabled, please contact Grandstream Support.

Important

- This feature is supported only on GRP260X Series device. More devices will be supported in the future.
- Only accounts with the required permissions can access this features.

1. Users can upload and manage default configuration files under **Resource Management > Default Config File**, and classify them based on device model, version, and other information.

Dashboard

Organization

Default Organization...

Overview

Extension

UCMRC

CloudUCM

VoIP Device

Call Quality

Device Template

Site

Task

Diagnostics

System

Resources

Alerts

Reseller Channel

Users

RPS Management

System Log

API Developer

GDMS Unified Communications

Deleted successfully

Plans & Services

World

Resources

Firmware

Other Resources

Default Config File

Storage Space

Upload

Delete

(Used space 22.00KB)

File Name/Version Number

All Models

File Name	Version Number	Supported Models	File Size	Last Updated	Update User Name	Description	Options
JD-SQ_GRP260X_1.0.0.1.gsdvc	1.0.0.1	GRP2602	4.00KB	07-06-2026 06:37	Grandstream test	—	
JD-SQ_GRP260X_1.0.0.2_remove.gsdvc	1.0.0.2	GRP26022, GRP2602W, GRP260_f_test, ...	6.00KB	06-30-2026 12:18	Grandstream test	—	
JD-CD_GRP260X_1.0.0.2.gsdvc	1.0.0.2	GRP26022, GRP2602W, GRP260_f_test, ...	6.00KB	06-30-2026 12:18	Grandstream test	—	
SriLanka-Telcom_GRP260X_1.0.0.1.gsdvc	1.0.1	GRP26022, GRP2602W, GRP260_f_test, ...	6.00KB	06-30-2026 12:19	Grandstream test	test	

Total 410page12

Default Config File

Upload Config File

Please contact Grandstream support to obtain the file.

Click or drag and drop file here to upload

Only supports .gsdvc files up to 2MB

* File Name

Enter a file name (up to 64 characters)

* Version Number

Enter version number (up to 64 characters)

* Supported Models

Select

Description

Enter description (up to 128 characters)

Cancel

OK

Upload Config File

2. Under **Reseller Channel > Default Config Customization** or **Task Management**, users can create config tasks by selecting target devices and configuration files.

Once devices connect to GDMS, they will automatically execute the corresponding tasks.

GDMS Unified Communications

Plans & Services

World

ylunsub_4

+ Add Custom Task

Dashboard

Organization

Default Organization...

Overview

Extension

UCMRC

CloudUCM

VoIP Device

Call Quality

Device Template

Site

Task

Diagnostics

System

Resources

Alerts

Reseller Channel

Users

RPS Management

System Log

API Developer

Reseller Channel

Track Device

Upgrade Task

Default Config Customization

Enter Task Name/MAC

Task Name	Model	Task Time	Creator	Status	Run Time	Options
test	GRP2601	08-03-2026 12:50 ~ 08-03-2026 15:59	Grandstream test	Completed	—	
gdtg	GRP2601	Immediate (08-03-2026 12:20)	Grandstream test	Stopped	—	
Remove JD-SQ Default configurati...	GRP2601,GRP2602,GRP2602W	07-05-2026 07:32 ~ 07-10-2026 15:59	Grandstream test	Timeout	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 10:47)	Grandstream test	Failed	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 10:33)	Grandstream test	Failed	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 10:33)	Grandstream test	Failed	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 10:32)	Grandstream test	Failed	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 10:32)	Grandstream test	Timeout	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 10:29)	Grandstream test	Timeout	—	
ylun测试的-20260703	GRP2601,GRP2602W,GRP2602,GR...	Immediate (07-03-2026 09:55)	Grandstream test	Failed	—	

Total 1210page12

Default Config Customization

Reseller Channel > Add Custom Task

ⓘ After adding a task, the selected device will execute it according to the task time when it goes online for the first time

* Task Name

Enter Task Name (up to 64 characters)

* Default configuration file ⓘ

Select Device Model

Default configuration file

☐ Perform factory reset ⓘ

* Task Time

☒ Immediate ☐ Scheduled ☐ Interval

* Target Device(s)

☒ All devices of this model ☐ Select Devices ☐ Enter MAC Address

Add Custom Task

Reseller Channel

Channel customers and service providers can obtain a list of purchased devices from Grandstream ERP. This list will allow the channel customer or service provider to:

1. Quickly assign devices to sub-channel customers. These customers will then be able to log into GDMS to manage the devices.

2. Manage devices directly for customers.

✓

Channel customers and service providers will need to contact Grandstream support to associate their GDMS account with an ERP account.

Track Device

View Device

To view all devices assigned to the account, click on the **Track Device** tab.

Reseller Channel ⓘ

Track Device

Upgrade Task

Sync from ERP

Import to Organization

Assign to Associated Company

Export

Reclaim Device

Return Device ⓘ

Filter ▾

All Models ▾

From All ▾

Q Enter MAC

Model	MAC Address	S/N	Origin	Imported Time ⬆	Status ⬆	Assign to	Options	⚙
UCM6104	00:0B:82:8D:E7:7B	21AWLS8G30...	Reclaim	2023-12-22 07:00PM	Unassigned	—	ⓘ	
GXP2160	C0:74:AD:0B:D7:CD	20EYZFYK800...	Reclaim	2023-12-22 06:46PM	Unassigned	—	ⓘ	
GXP2160	C0:74:AD:0B:D7:C6	20EYZFYK800...	Reclaim	2023-12-22 05:47PM	Configured	Organization	ⓘ	
WP820(WORLD)	C0:74:AD:0D:71:EA	24UMM4GK8...	Reclaim	2023-12-22 04:47PM	Configured	Organization	ⓘ	
HT813	00:0B:82:F2:A3:A4	207GKZ9JB1F...	Reclaim	2023-12-20 11:19AM	Configured	Organization	ⓘ	
GWN7600	C0:75:AD:98:66:15	GWN	474019498@qq.c...	2023-12-14 10:42PM	Configured	Network	ⓘ	
GXP2160	C0:74:AD:0B:D7:D1	20EYZFYK800...	Reclaim	2023-12-22 04:47PM	Configured	Organization	ⓘ	
HT802	C0:74:AD:1B:E1:B2	207GHQYKB0...	Reclaim	2023-12-22 04:47PM	Configured	Organization	ⓘ	
GWN7600	00:0B:82:AF:11:30	123456	Reclaim	2023-12-22 04:47PM	Returned	—	ⓘ	
GXP2160	C0:74:AD:0B:D7:C2	20EYZFYK800...	Reclaim	2023-12-20 11:19AM	Configured	Organization	ⓘ	

Track Device

Users can search for specific devices by using the filter and search options in the top-right of the **Channel Management** page.

⚠ Users cannot directly upgrade the firmware or update the configuration file of the devices from this list. Please refer to the Configure Device section.

Device Assignment Notification


When devices are assigned to an account, the  icon will show a notification. Clicking on the notification will show the list of assigned devices.

Device Assignment

For the devices that have been sold to the associated company customer, the user could allocate the devices to them. The associated company customer could log in to the GDMS platform to view and manage the devices.


Assign Devices:

- 1. Click on the Device Operation button at the top-right of the **Reseller Channel** page.
- 2. Click on **Assign to Associate Company** on the **Track Device** page. The user will be redirected to the batch device assignment page.

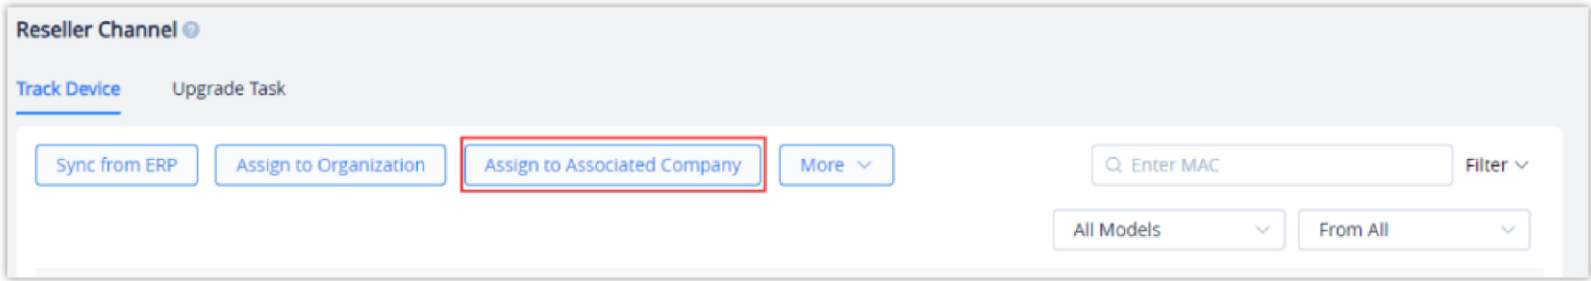

Device Operation Options

- 3. The user will be directed to the batch devices allocating page:

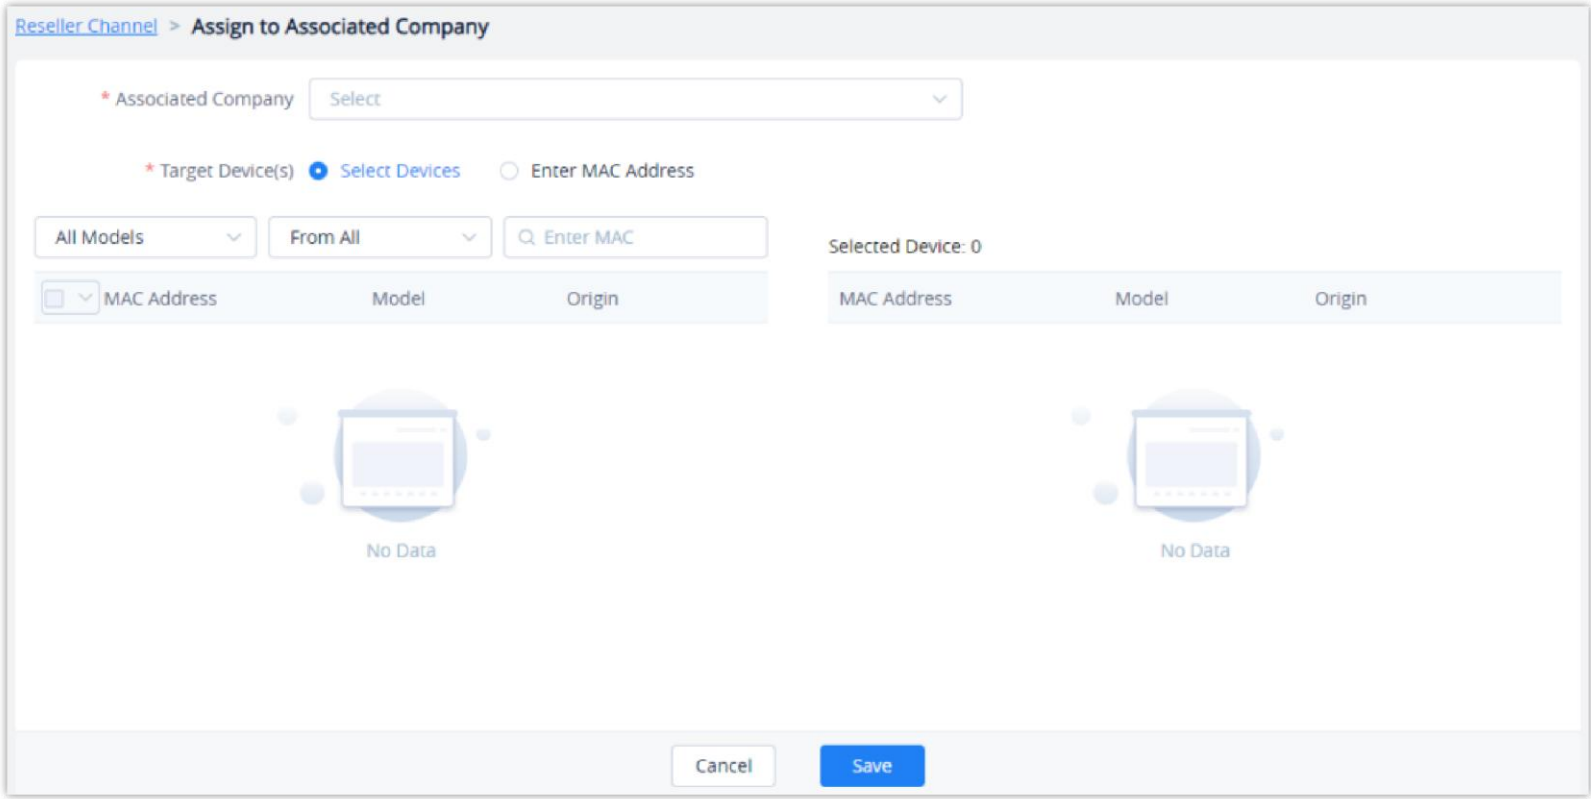

Assign Multiple Devices to an Associated Company

Select Associate Company	Select the associated company to add the device to.
Device	Select the devices to assign to the associated company from the list or enter the MAC addresses of the devices.

Assign to Associated Company

Copy and Paste Multiple MAC Addresses

4. Click the **Save** button to finalize the changes and the assignment. The sub-channel will then be notified of the device assignment.



- The device which has been allocated to a customer cannot be allocated to any customer else.
- When the device is allocated, the user cannot acquire back the device. If the device is allocated to a customer incorrectly, the user could contact the associated company customer to allocate the device back to the user.

Assign to Organization

To assign devices to different organizations, please navigate to **Reseller Channel** → **Track Device** then click on “Assing to Organization”.

Assign to Organization

Reclaim Device

Reclaim Device allows the user to reclaim devices that are assigned to an associated company. This can be done to forcibly reclaim the device by the superior channel. Once a device has been reclaimed, it will no longer appear in the account of the user in the associated company.

To reclaim a device, please navigate to **System** → **Reseller Channel**, then click on “More”, then “Reclaim Device”.


Reclaim Device

Choose the device(s) to reclaim then click “Save”.

Return Device

The user can use return a device to return it to the superior channel once it’s no longer needed. Once the device is returned, it will be deleted from the list of devices on the user’s account.

To return a device, please navigate to **System** → **Reseller Channel**, then click on “More”, then “Return Device”.

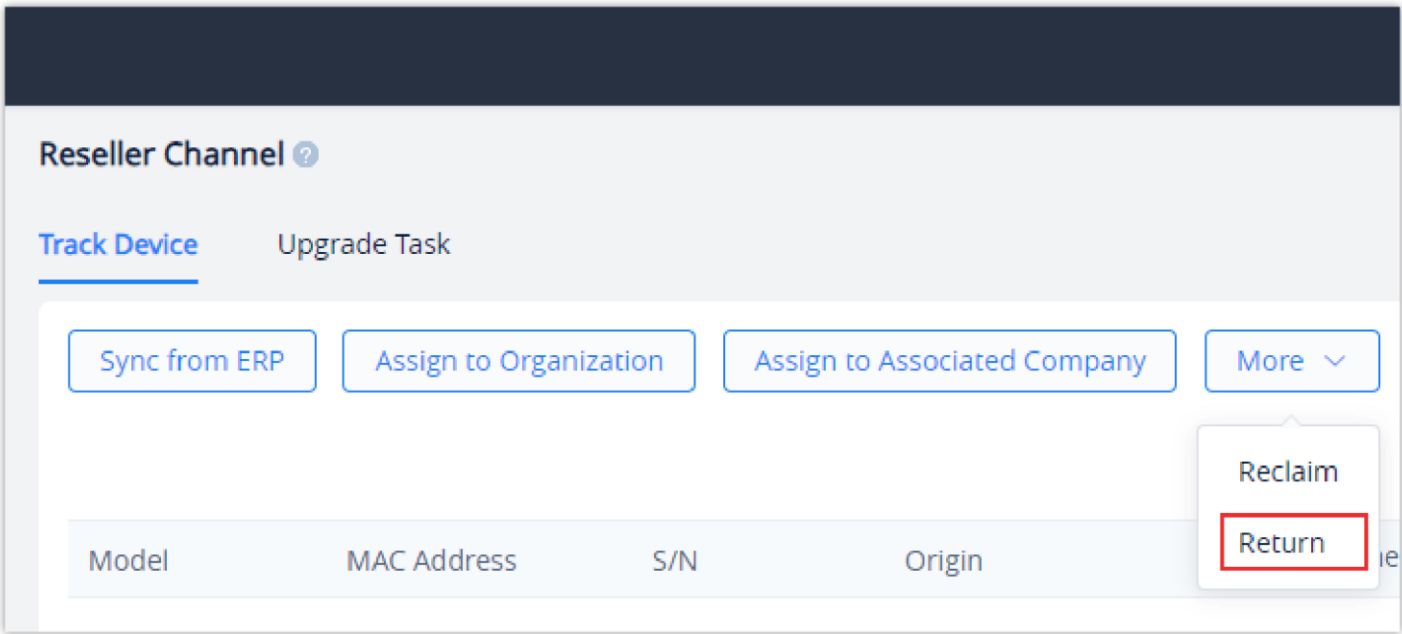


Return Device

Choose the device(s) to return then click “Save”.

Upgrade Task

Users can perform an upgrade task to devices that belong to a specific channel. The upgrading can be triggered to many devices at once or it can be performed subsequently.

On the main page of scheduled tasks, please click on “Add Upgrade Task” on the top right corner of the page.

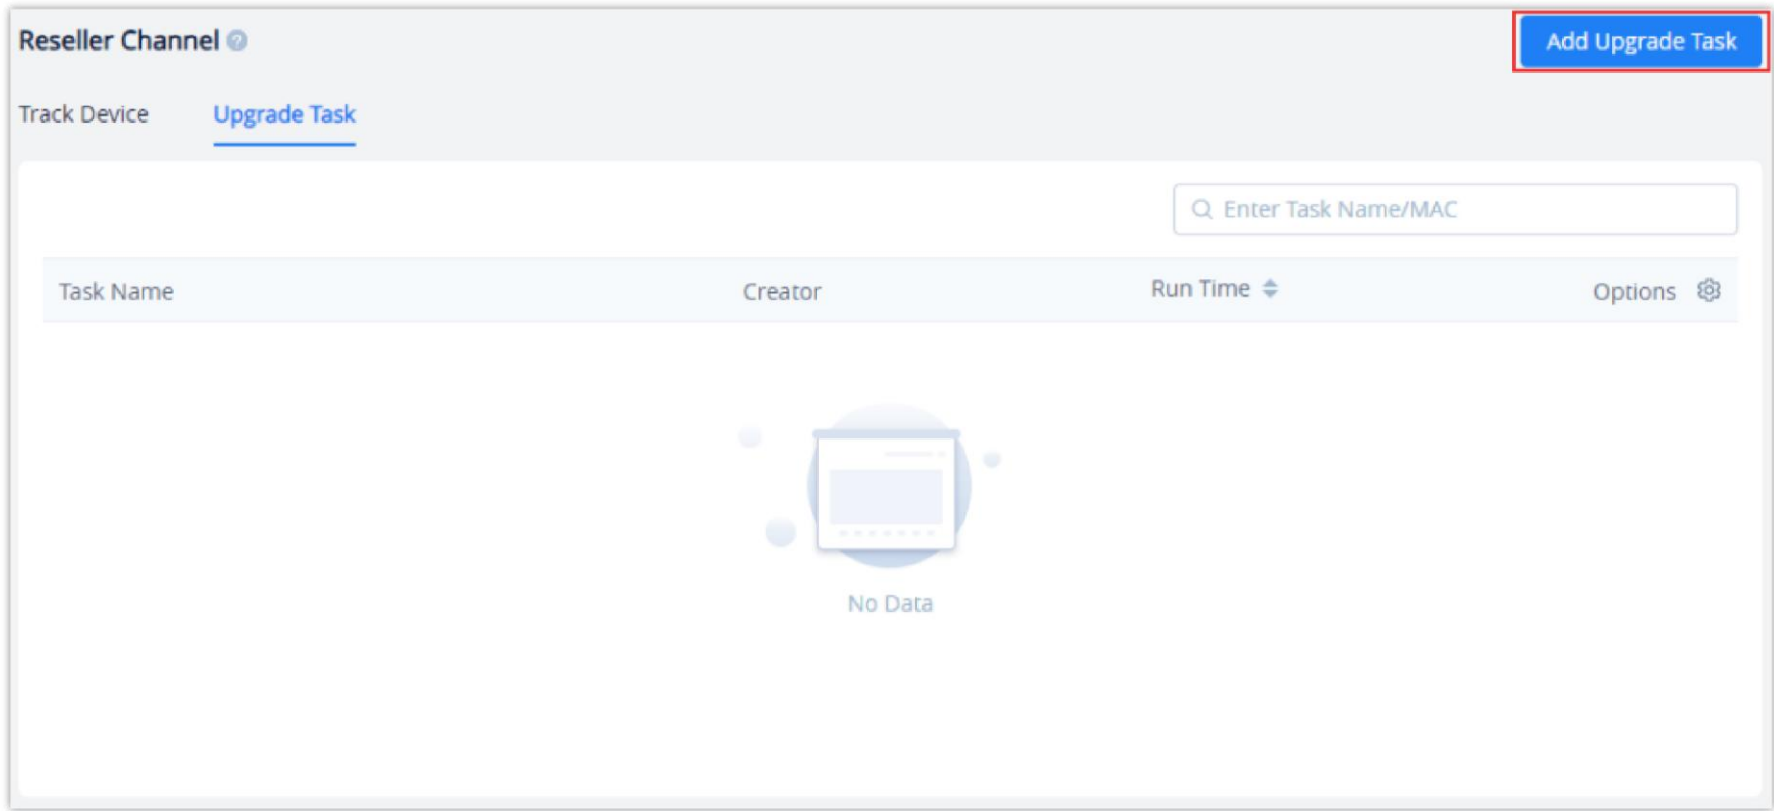

Add Upgrade Task

Add RPS (Redirection & Provision Server)

* Server Name

Please select the options that the RPS will provision:

☒

Config Upgrade via

?

HTTPS

▼

☒

Config Server Path

?

fm.grandstream.com/gs

☐

Config Server Username

?

☐

Config Server Password

?

👁

☐

Always Authenticate before Challenge

?

☐

Config File Prefix

?

☐

Config File Postfix

?

Cancel

Save

RPS MANAGEMENT

Server Name	Enter the server name.
Config Upgrade Via	Select the protocol used for configuration upgrade. • TFTP • HTTP • HTTPS • FTP • FTPS
Config Server Path	Enter configuration server path.
Config Server Username	Enter the username to authenticate into the server.
Config Server Password	Enter the password to authenticate into the server.
Always Authenticate Before Challenge	Only applies to HTTP/HTTPS. If enabled, the phone will send credentials before being challenged by the server.
Config File Prefix	If configured, only the configuration file with the matching encrypted prefix will be downloaded and flashed into the phone.
Config File Postfix	If configured, only the configuration file with the matching encrypted postfix will be downloaded and flashed into the phone.

To assign a specific RPS to an organization, click on the three dots and add an organization as indicated in the figure below.

Server Name	Upgrade Via	Config Server Path	Number of Organizations	Updated Time	Options
Server1	HTTPS	fm.grandstream.com/gs	0	2023/03/29 09:09AM	 
Total 1			  Add Organization		10/page

When an RPS is edited, the new RPS will be automatically delivered to the associated devices. If an RPS has been deleted, it only deletes the association between the RPS and the device. The RPS configuration will not be deleted from the device.

Users

The **User Management** page allows users to view, add, and edit users and manage role privileges. By default, GDMS has one administrator, which has all available privileges. Roles are sets of privileges that admins can assign sub-users.

Users

- **Add User**

To add a sub-user to the GDMS account, click on the **Add Sub-user** button and enter the following information:

Add User

User

After closing, the user will be disabled

Nickname

* Email

* Role

Select

Multi-factor Authentication

* Managed Organizations

World

Select

Cancel

Save

Add Sub user

User	Enables /Disables the user.
Nickname	Enter the display name of the user.
Email	Enter the email of the user.
Role	Select the role of the user.

Multi-factor Authentication	Toggle on/off the multi-factor authentication.
Managed Organizations	Select the organization (s) which the user can manage.

Upon creating the sub-user, an activation email will be sent to the configured email address. The sub-user must click on the provided link to activate the account.

○ Edit Subuser

To edit a verified sub-user’s role, click on the  button for the desired sub-user and select the new role. The sub-user’s other information cannot be modified even by an administrator.

Edit User

User

After closing, the user will be disabled

Nickname

111

*Email

jya

*Username

ly

*Role

admin

*Managed Organizations

World

EU Region

China

Custom AAA

Cancel

Save

Edit Sub user

The user will be displayed as “disabled” if the “user” option toggle is on:

	jhwang-test	jhwang-test	UC: 276033	World: Custom AAA	Disabled	192.168.126.11	2024-01-29 03:44AM			
---	-------------	-------------	------------	-------------------	----------	----------------	--------------------	---	---	---

User Disabled

For unverified sub-users, administrators can modify the name, email address, and role. Additionally, they can send an account activation email to the configured email address.

	jhwang-test	123@test.com	—	admin_backstage	yxxu	inactivated			
---	-------------	--------------	---	-----------------	------	-------------	---	---	---

Edit Unverified Sub user

○ Delete User

To delete user accounts, click on the  button for the desired user. Deleted users cannot log into GDMS.

Role

○ Add Role

To add a role with specific privileges, click on the **Add Role** button at the top right of the **User Management → Role** page and enter the following information:

Role > Add Role

* Role Name

Description

* Select Permissions

VOIP

UCMRC

Resources

Alerts

Reseller Channel

Others

Order History

☐ All

☐ Dashboard

☐ Overview

☐ Device Management - VoIP Device

☐ Device List

☐ Import Device

☐ Upgrade Firmware

☐ Site Assignment

☐ Task History

☐ Sync Device Local Configuration

☐ Transfer Device

☐ Export Device

☐ Reboot Device

☐ Set Parameters

☐ Reconfigure

☐ Remote Access to Web UI

☐ Add Device

☐ Edit Device

☐ Factory Reset

☐ Account Configuration

☐ Device Details

☐ Remote Access to Device Interface

☐ Authorization Management

☐ Delete Device

☐ Device Diagnostics

☐ Operation Logs

☐ Enable/Disable Push Notifications

☐ Device Management - GXW4500 Series

☐ Device List

☐ Export Device

☐ Reboot Device

☐ Device Details

☐ Remote Access to Device Web UI

☐ Edit Device

☐ Assign Site

☐ Device Diagnostics

☐ Add Device

☐ Delete Device

☐ Operation Logs

☐ Import Device

☐ Upgrade Firmware

☐ Task History

☐ VoIP Account - SIP Account

Cancel

Save

Add Role

Role Name	Users need to input the name of the role in this field.
Description	Users need to input the description of the role in this field.
Select Permissions	Users need to select the privileges of the role.

Add Role

!

If a role does not have the privilege of a feature, the GDMS portal will not show it.

○ **Edit Role**

To edit a role’s name, description, and privileges, click on the  button for the desired role.

!

Users cannot edit the roles of the default admin account.

○ **Delete Role**

To delete a role, click on the  button for the desired role. If the role includes some sub-users accounts, the role cannot be deleted.

User Settings

The user can customize his/her settings when logged into the account. To access the settings of the account, the user must click on the name of the account in the top right corner, and then select **User Settings**.

User Settings

Nickname

Modify

Username

Modify

Email

@grandstream.com

Modify

Password

Modify

Language

English

Modify

Timezone

(GMT+01:00) Casablanca, Monrovia

Modify

Time

24 hours

Modify

Date Format

YYYY/MM/DD

Modify

Appearance

Follow System(Light)

Modify

Multi-Factor Safety Authentication

Email Authentication

[Multi-Factor Authentication Instructions](#)


Modify

GDMS User Settings Page

Nickname	The display name of your account. Click “Modify” to modify your nickname.
Username	The name used to log into Grandstream Cloud Platform. Click “Modify” to modify your username.
Email	The email bound to the account created. Click “Modify” to modify your email.
Password	The password is hidden and cannot be viewed in clear text. This option allows modification of the password only. Click “Modify” to modify your password.
Language	The display language of the web GUI. Click “Modify” to modify your display language.
Timezone	The timezone selected to display your time and date. Click “Modify” to modify your timezone.
Time	The time format selected to display your time. Click “Modify” to modify your time format.
Date Format	The date format selected to display your date. Click “Modify” to modify your date format.
Appearance	Set the theme of the user interface. ● Follow System: The theme will be selected according to the system’s theme. ● Light: Light theme will be selected. ● Dark: Dark theme will be selected.
User Type	The type of the user selected. Click “Modify” to modify the type of the user.
Company Name	The company name which is given using this account. Click “Modify” to modify the name of the company.
Country	The country selected for the account. Click “Modify” to modify your country.
Multi-factor Safety Authentication	Displays the MFA method currently configured for this account. Click “Modify” to change and reconfigure the authentication method. Note: If the GDMS administrator has enforced a specific MFA method, this option cannot be modified

Sign Out

Log out of the account by clicking on the username in the top-right corner of the GDMS portal and clicking **Sign Out**.

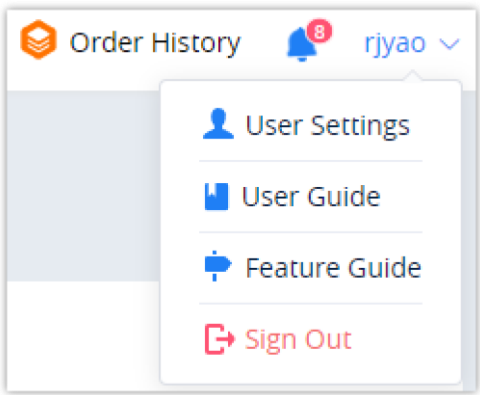

Sign Out

Delete GDMS Account

If the user does not want to use the GDMS platform to manage devices anymore, the user can delete the GDMS account and all sub-accounts of the enterprise.


 After deleting the GDMS account, all data of the GDMS account will be deleted.

- 1. Click the **“Personal Information”** option on the name menu at the upper right corner of the main page to enter the personal information configuration page.
- 2. Click the **“Delete business account”** button at the top of the page to delete the current GDMS account. If the enterprise GDMS administration account is deleted, all sub-accounts under the main GDMS account will also be deleted.

Reset Multi-Factor Authentication for Sub-users

Since multi-factor authentication is mandatory for all accounts, the administrator cannot disable MFA for sub-users. However, the administrator can reset the MFA configuration for a sub-users in cases where they have lost their MFA device or they’re unable to log in.

To reset MFA for a sub-user, navigate to the Users section under System, click on the *Remove MFA* icon in the target user options.

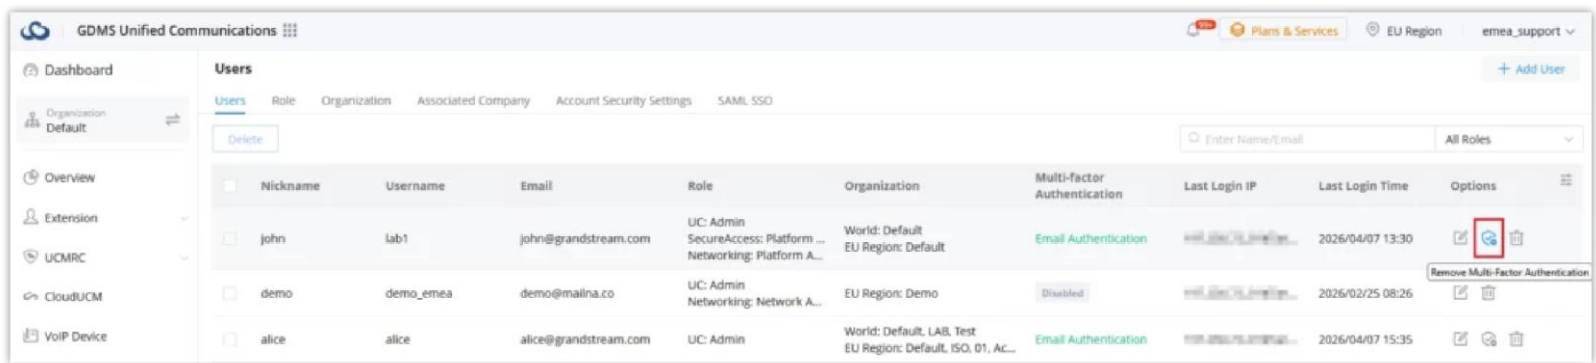

GDMS Users Page

A confirmation prompt will appear requesting the administrator’s account password. Upon confirmation, the sub-user’s current MFA configuration will be cleared. The sub-user will be prompted to reconfigure their MFA method on their next login attempt.

Remove Multi-Factor Authentication of "demo" account?

After removal, users will need to re-complete the authentication binding when logging in.

Please enter login password to continue:

Cancel

Remove

Remove User MFA Prompt

!

Note:

For detailed steps on how to configure multi-factor authentication, please refer to the [GDMS MFA Device User Guide](#).

Account Security Settings

Under this tab, administrators can manage security settings for sub-user accounts they have created. This allows them to enforce security requirements, strengthening account protection and reducing the risk of login credential compromise.

Users

UsersRoleOrganizationAssociated CompanyAccount Security SettingsSAML SSO

Account security settings apply to all accounts (including the main account), and only the main administrator has this configuration.

Password Security

Password Security

Account Security

* Idle Timeout (min)

100

Login Duration (min)

Range: 5-1440

* Multi-factor Authentication Type

Email Authentication

Authentication App

TOTP Hardware Token

FIDO Security Key

Multi-factor Authentication User Guide

Allow Trusting This Browser

When enabled, users can choose to trust the current browser during login, and subsequent logins will not require multi-factor authentication

Access Rules

IP Access Rules

Allow All

Only Allow Specified IP(s)

Save

© 2026 Grandstream Networks, Inc. Cookies

Account Security Settings Tab

Password Security

Password Security

Password Security

* Password Expiration (days)

90

* No Repeating Passwords

1

Password Security	Toggle on/off the password security.
Password Expiration (days)	Specify the number of days of validity of a password. Once the number of days configured has elapsed, the user will be

	prompted to change his/her password upon login.
No Repeating Passwords	Settings this option will prevent the user from using a password which he/she had previously used. You can set the number of previous passwords which have been used to prevent them from being used again as a new password.

Account Security

Account Security

* Idle Timeout (min) ⓘ

180

Login Duration (min) ⓘ

Range: 5-1440

Multi-Factor Authentication ⓘ

All users will be affected

[Multi-Factor Authentication Instructions](#)

Allow Trusting This Browser

After enabling, users can choose to trust the current browser when logging in, and subsequent logins do not require multi-factor authentication

Idle Timeout (min)	This configures the number of minutes of a user being idle on the web GUI before he/she can be automatically logged out by the system. The user can enter a value from 5 to 1440 minutes. Configuring this value is required. Note: The default value is 180.
Login Duration (min)	This configures the number of minutes a login session can last before the user is logged out automatically by the system. The user has to log in again to start after being logged out. Note: The user can enter a value between 5 and 1440
Multi-factor Authentication	Configures the multi-factor authentication method that all users must use. Users with MFA already enabled are not subject to this requirement. The options are: 1. No Limit: Users can choose any supported MFA method. 2. Email Authentication: MFA codes are delivered via email. 3. Authentication App: Time-based one-time passwords (TOTP) via authenticator apps (e.g., Google Authenticator). 4. TOTP Hardware Token: Physical token-based OTP generation. 5. FIDO Security Key: Hardware-based authentication using FIDO-compliant keys.
Allow Trusting This Browser	Toggle this feature on to allow users to choose to trust the browser for future logins. When the user chooses to trust a certain browser on a device, they will not be prompted to enter the multi-factor authentication code when they login again.

Access Rules

This section in the GDMS web UI under **Account Security Settings** allows users to configure and manage IP-based access control for enhanced protection. It provides options to specify which IP addresses or network segments are allowed to access the account, as well as controls to add or remove entries from the trusted list.

Access Rules

IP Access Rules

Allow All

Only Allow Specified IP(s)

Add

Delete

	Updated Time	IP/network segment	Remarks	Options
	2026/16/06 10:42PM	172.16.8.8	—	

Total 1

10/page

<

1

>

Save

On this page, users can configure the following parameters:

IP Access Rules	This setting defines which IP addresses are permitted to access the user’s account: Allow All: Grants access from any IP address, with no restrictions. Only Allow Specified IP(s): Restricts access to only the IP addresses listed by the administrator or user. All other IPs will be denied.
Add	Click this button to input and save the trusted IP(s)/Network segment(s).
Delete	Click this button to remove an entry from the list of trusted IP addresses or network segments.

Associated Company Management

Users can add associated companies for management in the GDMS platform. After establishing the association relationship, users can select the associated companies and share the organizations with the associated companies for management. The associated companies are a way to centralize the management of the devices of many entities.

Add Associated Company

After adding the associated enterprise, the user can select the associated company and share the organization with the company

The user can obtain the binding address from the enterprise with which the user wants to establish the association relationship.

- The user can access the **Users** → **Associate Company** page, and click the “Add Associated Company” button to add the associated company. Please see the screenshot below:

Add Associated Company

* Associated Company Binding Address

Contact the company administrator to obtain the "Associated Company Binding Address"

Remarks

Add Associated Company

2. Enter the binding address of the associated company in the field "My Company Associating Address".
3. Fill in the remarks of the associated company.
4. The user can click the "Save" button to add the associated company. Once done, the user can view the associated company name, remarks, and association time on the "Associated Companies" list. Please see the screenshot below:

Users Add Associated Company

Users Role Organization Associated Company

Other GDMS accounts (e.g., customers) can be added as associated companies and managed by your organization. [View my associated company binding address](#)

☐	Company Name	Remarks	Add Time	Options
☐	yxxu company 1234	yxxu公司	25/02/2022 09:54 AM	Edit
☐	jhwang's company	jhwang的企业	16/02/2022 09:36 AM	Edit

Total 2 10/page

Associated Companies List

Edit Associated Company

On the "Associated Company" list, the user can click the button to access the "Edit Associated Company" interface to modify the remarks of the associated company.

Edit Associated Company

Company Name


Remarks

Add Time

Edit Associated Company

Disassociate Company

If the user wants to disassociate the relationship with the associated company, the user can select the enterprise and click the button to disassociate the association relationship.

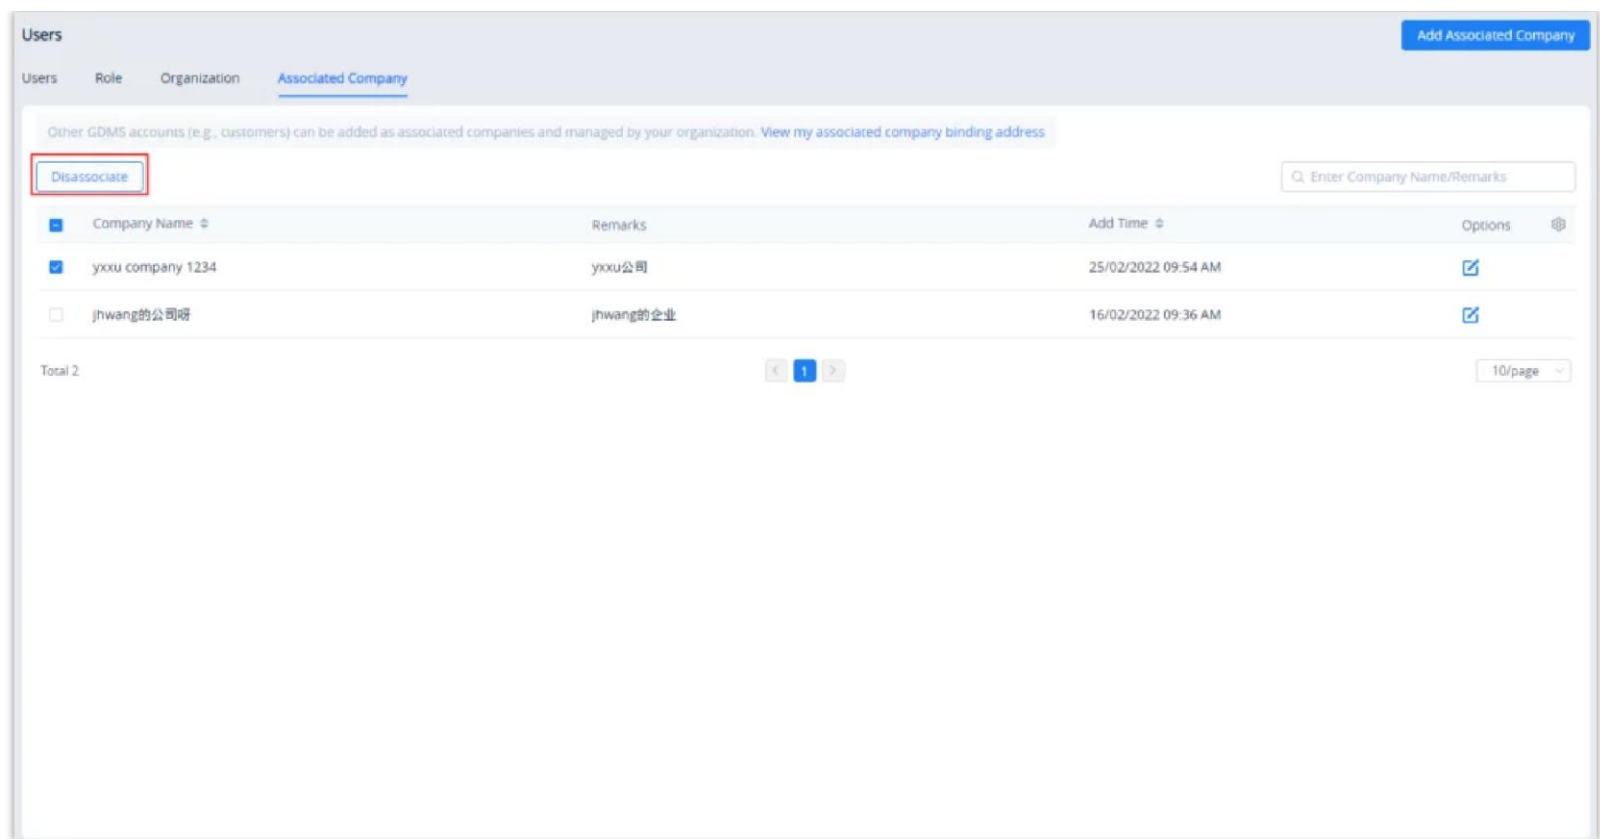

Disassociate Company

Note

After disassociating the association relationship, the shared organizations will not be affected, the organization can also be managed by the previously associated enterprise.

SAML SSO

SAML SSO, Security Assertion Markup Language Single Sign-on is a log in method in which the user is identified and authenticated using an access code

- **Identity Provider Configuration**

To add a SAML identity provider, please navigate to **Users > SAML SSO > Configure**, then create the configuration according to the table below.

Users

UsersRoleOrganizationAssociated CompanyAccount Security SettingsSAML SSO

ConfigureSAML SSO Role

SAML SSO Configuration Process

User Guide

Configure IdP Service ⓘ

Click the Entity ID and ACS URL to copy the data and complete the configuration in the IdP server

[Entity ID](#)[ACS URL](#)

➔

Set up the SAML IdP

Set up the SAML IdP within the GDMS using the metadata provided by the IdP

➔

Set up roles

Add the role associated with the SAML IdP configuration

Add SAML IdP

SAML IdP

SAML SSO

☒

* SSO Access Code ⓘ

Support 1-64 digits of letters, numbers, and _ - .

Remark

0-64 characters

Metadata ⓘ

1-128 characters

© 2024 Grandstream Networks, Inc. [Cookies](#)

SAML SSO Configure

SAML SSO	Enable SAML Single Sign-on
SSO Access Code	Set a unique SSO access code. On the GDMS login page, use the code to navigate to the corresponding SSO service.
Remark	Enter a remark regarding this SAML Identity Provider.
Metadata	This section is for SAML IdP metadata. The user can upload the metadata.
IdP Entity ID	Enter identifier provided by the Identity Provider. Note: IdP stands for Identity Provider.
X.509 Cert SHA1 Fingerprint	Fingerprint (SHA1) of the SAML certificate provided by your Identity Provider (IdP). This will be used for encryption / validation.
SSO Login URL	Users will be redirected to this URL to log in again when their session expires.
SSO Logout URL	When the user logs out, the user will be redirected to this URL and the IdP account will be logged out simultaneously.

○ SAML SSO Role Configuration

SAML SSO role allows assigning roles directly from the identity provider platform, these roles will take effect when the role of the same exact name is selected for a specific user on the identity provider platform.

On GDMS, the user should create the roles on SAML SSO Role page to specify the permissions which are accorded to this role.

1. To create a role please navigate to **Users > SAML SSO > SAML SSO Role** then click the button “Add”.

Users

UsersRoleOrganizationAssociated CompanyAccount Security SettingsSAML SSOSAML SSO Role

ConfigureSAML SSO Role

Add

Role NameOrganizationNetworkOperation

No Data

© 2024 Grandstream Networks, Inc. Cookies

2. Enter the Role Name, the Role Name must match the name of the role created on the identity provider platform. Select the organization(s) on which the role will apply. By enabling the option Networking, the user can choose the corresponding role on GDMS Networking. If you choose the role “Guest Administrator” this role will not inherit the permissions.

SAML SSOSAML SSO > Add role

General SettingsUC PermissionsNetworking Permissions

* Role Name ⓘ

The role must be the same as the IdP1-64 characters

UC Organization

World

Select organization

Networking

☐ Auto Add New Network ⓘ

Next

Add Role General Settings

3. Click “Next”, the select the UC Permissions to grant for this specific role.

SAML SSO > **Add role**

✓

General Settings

UC Permissions

Networking Permissions

< Basic

UCMRC

CloudUCM

Resources

Alerts

Reseller Channel

RPS Management

Users

System >

☐ All

☐ Dashboard

☐ Overview

☐ Extension - SIP Account

☐ Account List

☐ Add Account

☐ Import Account

☐ Export Account

☐ Edit Account

☐ Delete Account

☐ Modify SIP Server

☐ Go to PBX/CloudUCM Web UI to edit extension

☐ Extension - SIP Server

☐ SIP Server List

☐ Add Server

☐ Delete Server

☐ Edit Server

☐ VoIP Device

☐ Device List

☐ Transfer Device

☐ Add Device

☐ Authorization Management

☐ Import Device

☐ Export Device

☐ Edit Device

☐ Delete Device

☐ Open Subscription

☐ Upgrade Firmware

☐ Reboot Device

☐ Factory Reset

☐ Device Diagnostics

☐ Site Assignment

☐ Set Parameters

☐ Account Configuration

☐ Operation Logs

☐ Task History

☐ Reconfigure

☐ Device Details

☐ Enable/Disable Push Notifications

☐ Sync Device Local Configuration

☐ Remote Access to Web UI

Back

Next

UC Permissions

- Click "Next", then select the corresponding role on GDMS Networking. By selecting a specific role, the new role will inherit the permissions granted to the aforementioned role. After specifying the role, click "Finish".

SAML SSO > **Add role**

✓

✓

General Settings

UC Permissions

Networking Permissions

Permissions

Custom

Back

Finish


Networking Permissions

Organization Management

If users want to manage devices in multiple associated companies, users could create multiple organizations (such as customer enterprises, and sub-companies), and assign the devices to multiple users to manage separately. The devices, SIP accounts, and other parameters are separated between different organizations. The data in a specific organization can only be viewed and managed by the administrator who has permission.

All devices and data are in the "**Default**" organization by default.

Multiple organizations and administrators:

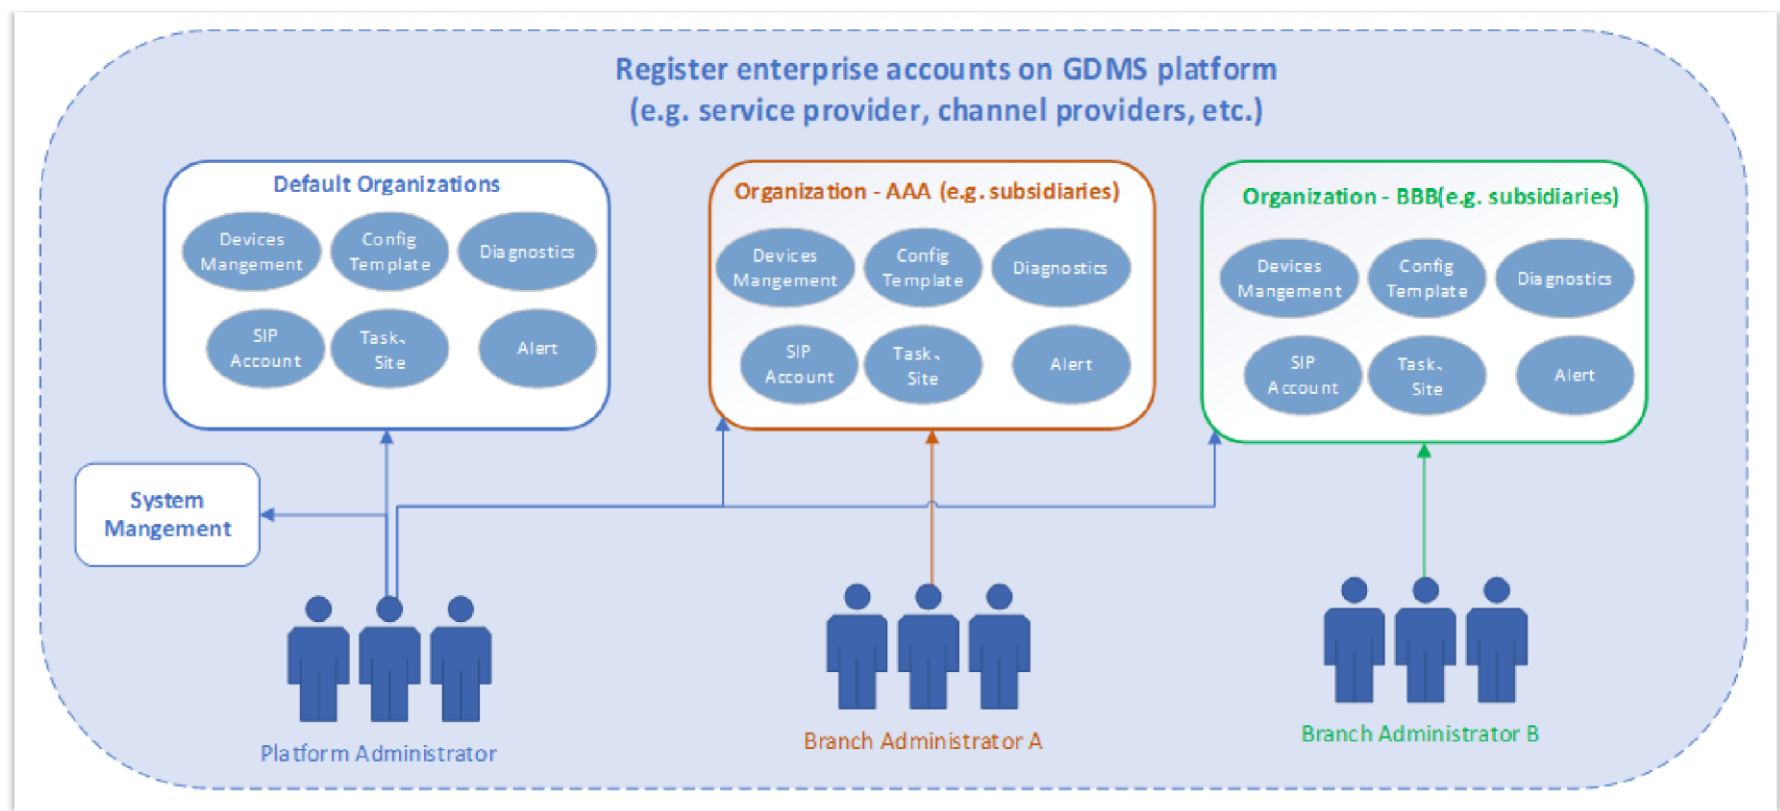


Multiple Organizations and Administrators

Switch Organization

If the user has permissions for multiple organizations, the user could switch to manage different organizations.

1. Click the drop-down box of the Organizations menu at the upper left corner of the page to select the organization the user wants to manage.
2. After switching the organization, the user only could view/edit the Device, SIP Account, Template, and other data under the organization.

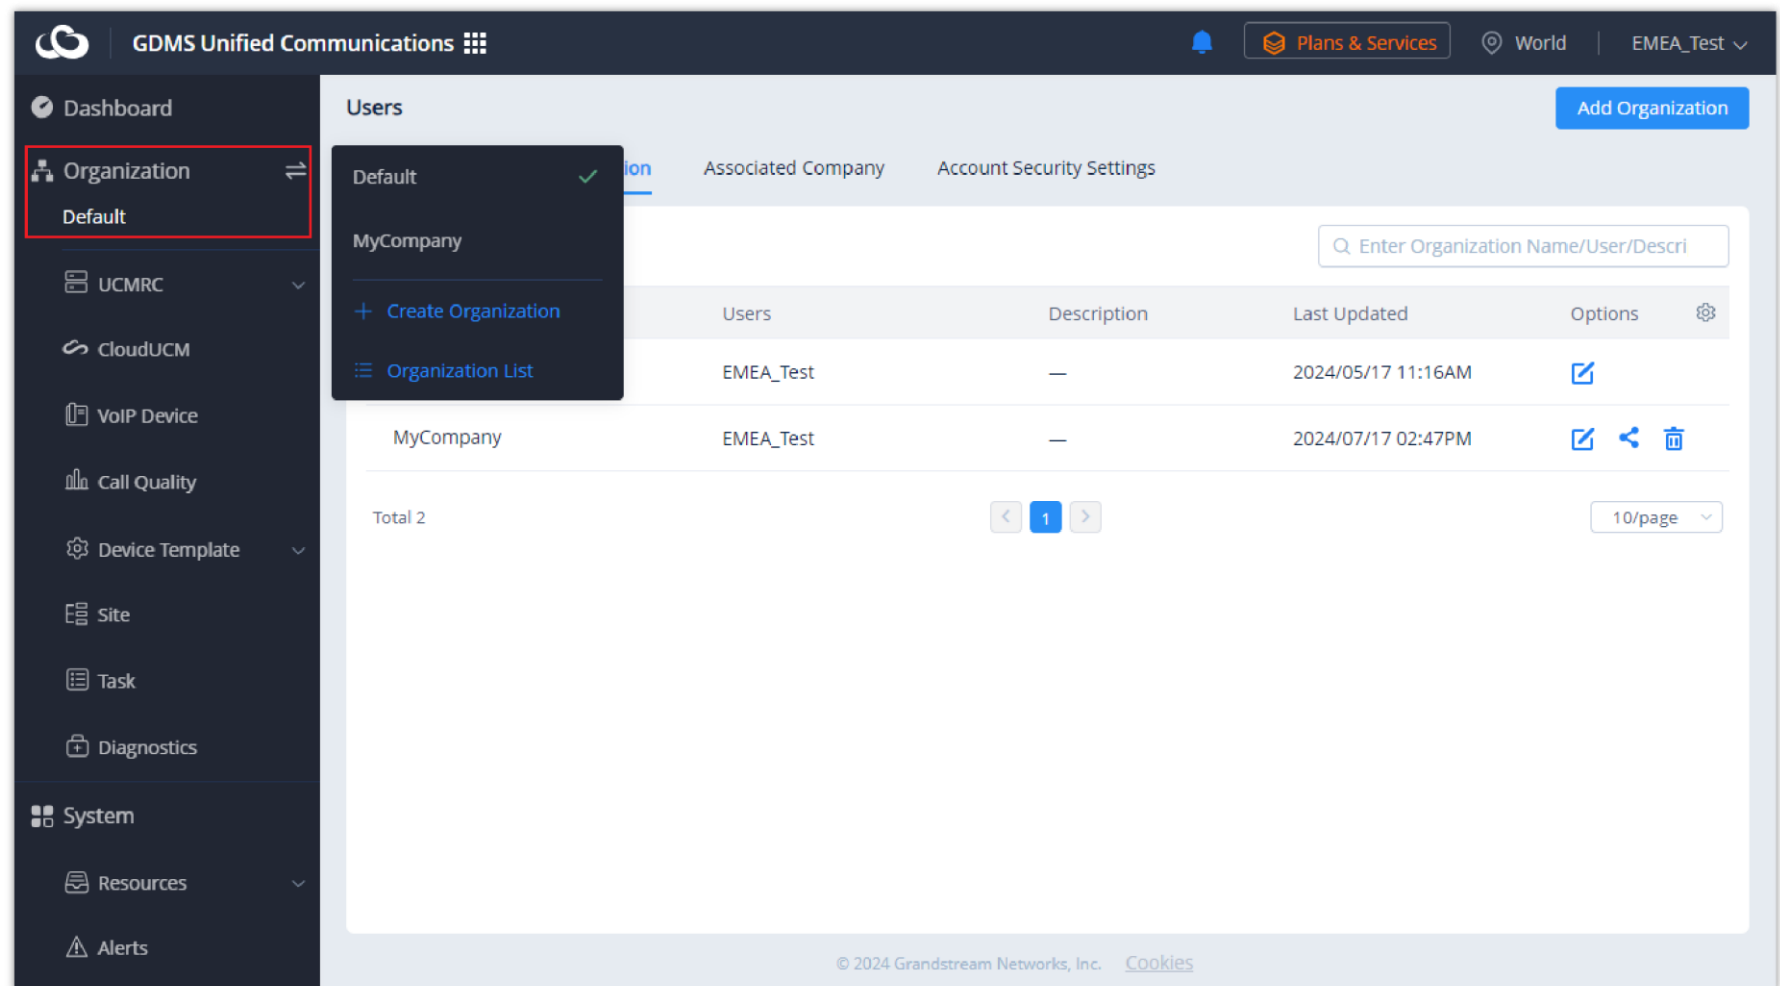

Switch Organization

Add Organization

The user could create an organization if the user has permission.

1. On the menu at the right side of the page, under **System** category, select the tab **Users**, and select the **Organization** tab, click the "Add Organization" button at the upper right corner.
2. Fill in the information of the organization as shown in the following figure:

Add Organization

Create subordinate organization (e.g. customer's company). Devices and SIP accounts for each organization will be managed separately. [View detail](#)

*

Organization Name

Assign User

GS-iliias

Clone Organization

Select

Description

Cancel

Save

Add Organization

Organization Name	Input the name of the organization.
Assign User	Select the users who will have permission to manage the organization.
Clone Organization	This is used to select to copy data from other organizations, the data include SIP accounts, model templates, group templates, sites, etc. When the organization is created successfully, the data under the specific organization will be copied to the current organization.
Description	Input detailed descriptions of the organization.

Add Organization

3. Click the Save button to save the organization in the GDMS platform.
4. The system will switch to the newly created organization by default, and the user could add devices to the newly created organization for management.

Edit Organization

Users can edit the organization’s information at any time.

1. On the menu at the right side of the page, select System Management → User Management, and select the “Organization” tab to view all organizations under the account.
2. Click on the button



following the organization name to access the editing page. The user could edit the organization name, the administrator of the organization, and descriptions, as the figure shows below:

Edit Organization

Create subordinate organization (e.g. customer company/subordinate company), the devices and SIP accounts for each organization will be manged separately.

* Organization Name

Default Organization

Assign User

yxxu rjyao11 ylluo123 yxxusub

Description

Cancel

Save

Edit Organization

Delete Organization

1. On the menu at the right side of the page, select System Management → User Management, and select the “Organization” tab to view all organizations under the account.
2. Click on the Delete button following the organization name, the organization will be deleted completely after confirmation, including the SIP accounts, templates, tasks, diagnostics histories, and other data under the organization.

! If there are devices in the organization, the organization cannot be deleted. Please transfer the devices to other organizations before deleting the organization.

Share Organization

The user can select to share the organizations with the associated enterprises. There are 2 methods of sharing permissions: Co-management and Authorized Management.

1. On the “Organization” management interface, the user can select the organization that the user wants to share with another enterprise for management and click the button to access the “Share” organization interface. Please see the screenshot below:

Share

Organizations can only be shared between enterprises in the same region.

* Share Permission

Select

* Associate Enterprise

Select

Cancel

Save


Share Organization

Share Permission	There are 2 methods of sharing permissions to another enterprise: Co-management and Authorized Management.
------------------	--

	Co-management: After sharing the organization, the user can manage the organization with the associated enterprise together. The associated enterprise can manage all devices in the shared organization and view the related data. Notes: • If the user sets to “Co-management”, the associated enterprise can manage the organization, but the associated enterprise cannot delete the shared organization. • If the user has shared the organization with one associated enterprise for management, the user cannot share the organization again with any other enterprise. Authorized Management: After sharing the organization to the associated enterprise, the user can fully authorize the management permissions to the associated enterprise for management, and the user does not have permission to manage this organization anymore. Note: • If the user sets to “Authorized Management”, the user cannot make any operation to this organization, and the organization information will be removed from the user’s “Organization” list. The data in the organization will be transferred to the associated enterprise for management. • After sharing the organization through the “Authorized Management” method, the associated enterprise can manage/edit/delete the organization. • After sharing the organization through the “Authorized Management” method, the associated enterprise can share the organization again with another associated enterprise.
Associate Enterprise	The user needs to select the associated enterprise with which the user wants to share the organization.

Share Organization

2. The user can select “Share Permission”: “Co-management” or “Authorized Management”.

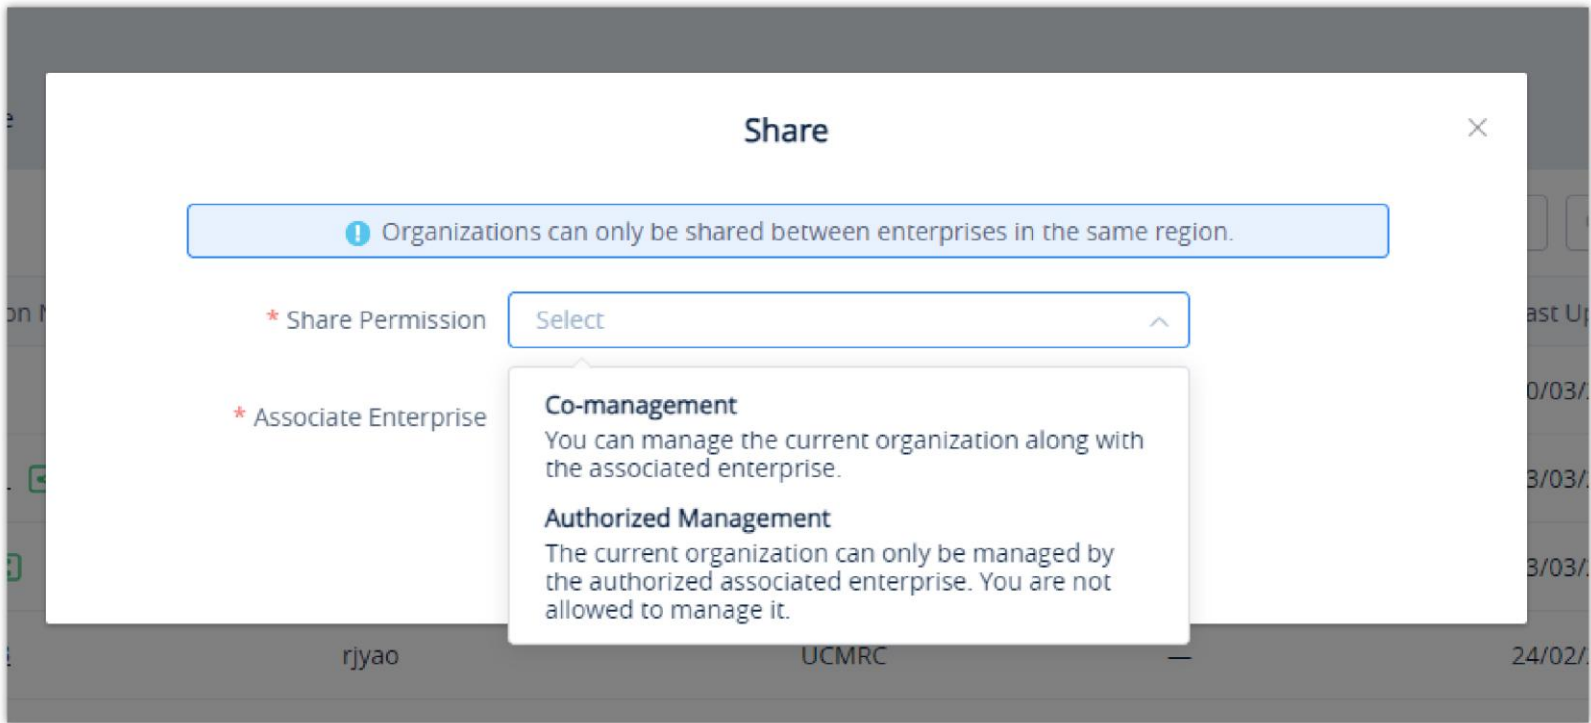

Share Permission

3. Select the associated enterprise to which the user wants to share the organization.
4. After clicking the “Save” button, the selected organization will be shared with the selected associated enterprise.
5. After the operation steps above, the user can view the organizations that were shared with other associated enterprises and shared with other associated enterprises on the “Organization” list. Please see the screenshot below:

All Subsystems						Q. Enter Organization Name/User/Descri	
Organization Name	User	Owned Subsystem	Description	Last Updated	Options		
Default Organization	yxxu, yxxusub, 333, 444, yxxuchild, zhdeng-te...	VoIP, UCMRC	—	2021/09/28 05:43AM			
111111111	yxxu, jhwangsub	VoIP, UCMRC	www	2022/03/03 08:20AM			
1111111共享-共同管理111111_20220224200...	yxxu	VoIP, UCMRC	—	2022/03/16 10:52PM			
12123	yxxu, jhwangsub, rjyao@grandstream.cn	VoIP, UCMRC	—	2022/01/07 05:40AM			
123123	yxxu	VoIP	—	2022/03/03 08:20AM			
123321-共同管理	yxxu, 111111111@test.com, 222222222@test.com, 1...	VoIP, UCMRC	来自yxxu企业的	2022/03/01 12:48AM			
aaaaaaaaaaaa	yxxu	VoIP, UCMRC	—	2022/03/03 09:09AM			
ceshi	yxxu, 10@test.com, 222222222@test.com, 1...	VoIP	—	2020/07/30 12:06AM			
gateway	yxxu, 333, 383961310@qq.com	VoIP	—	2021/09/01 12:19AM			
grp260x	yxxu, 10@test.com, 11@test.com	VoIP	—	2022/02/25 05:33AM			
Total 19						10/page	

Organization List Shared Organization

: The label indicates the organization has been shared with another associated enterprise for management together.

: The label indicates the organization is shared with another associated enterprise for management together.


Notes

- The organization can only be shared between the enterprises in the same region. If the selected associated enterprise does not enable the service in the current region, the user needs to inform the associated enterprise to enable the service in the current region so that the organization can be shared with the associated enterprise.
- The user can access the User Management → Associated Enterprises interface to add the associated enterprises.

Cancel Sharing Organization

The user can cancel sharing the organization with the associated enterprise.

1. On the “Organization” list, the user can select the organization with which the user wants to cancel sharing with the associated enterprise and click the button to cancel sharing with the organization. Please see the screenshot below:

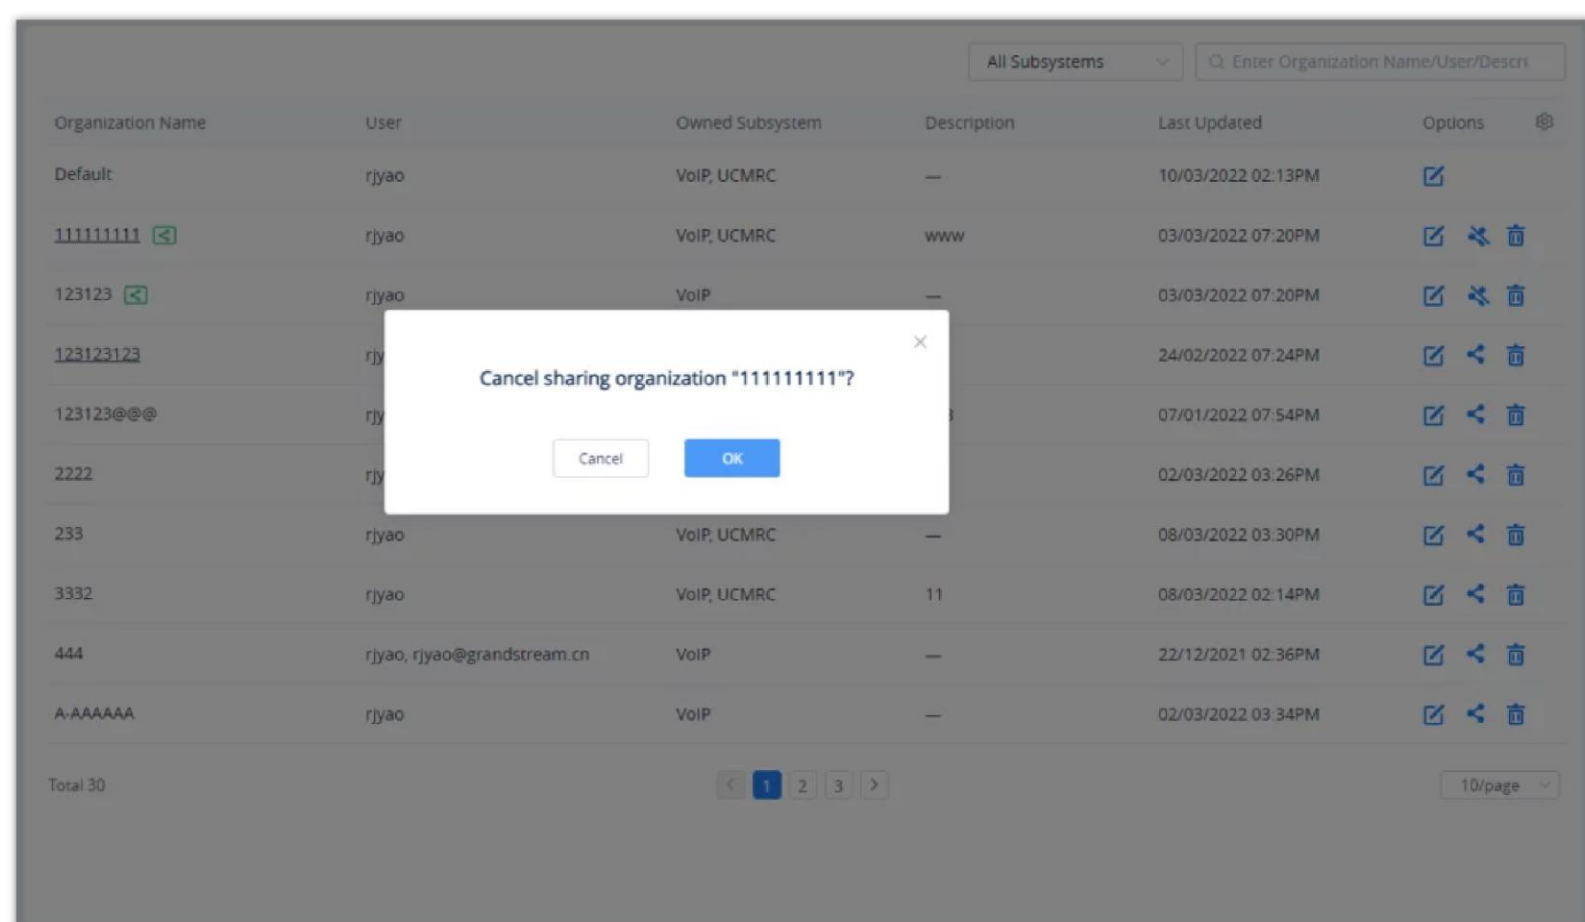

Cancel Sharing Organization

2. After canceling sharing the organization, the user will get the organization management permission back, and the associated enterprise cannot manage this organization anymore.


Notes

- After canceling sharing an organization, the user can share the organization again with another associated enterprise.
- The user can cancel sharing the organization only if the user sets the “Co-management” method when sharing the organization. If the user sets the method to “Authorized Management”, the user does not have any management permission after sharing the organization with the associated enterprise.

Return Organization

After receiving the shared organization, the associated enterprise can return the management permission to the user.

On the “Organization” list, the user can view the received shared organizations and select the organization to which the user wants to return it by clicking the button  as the screenshot shows below:

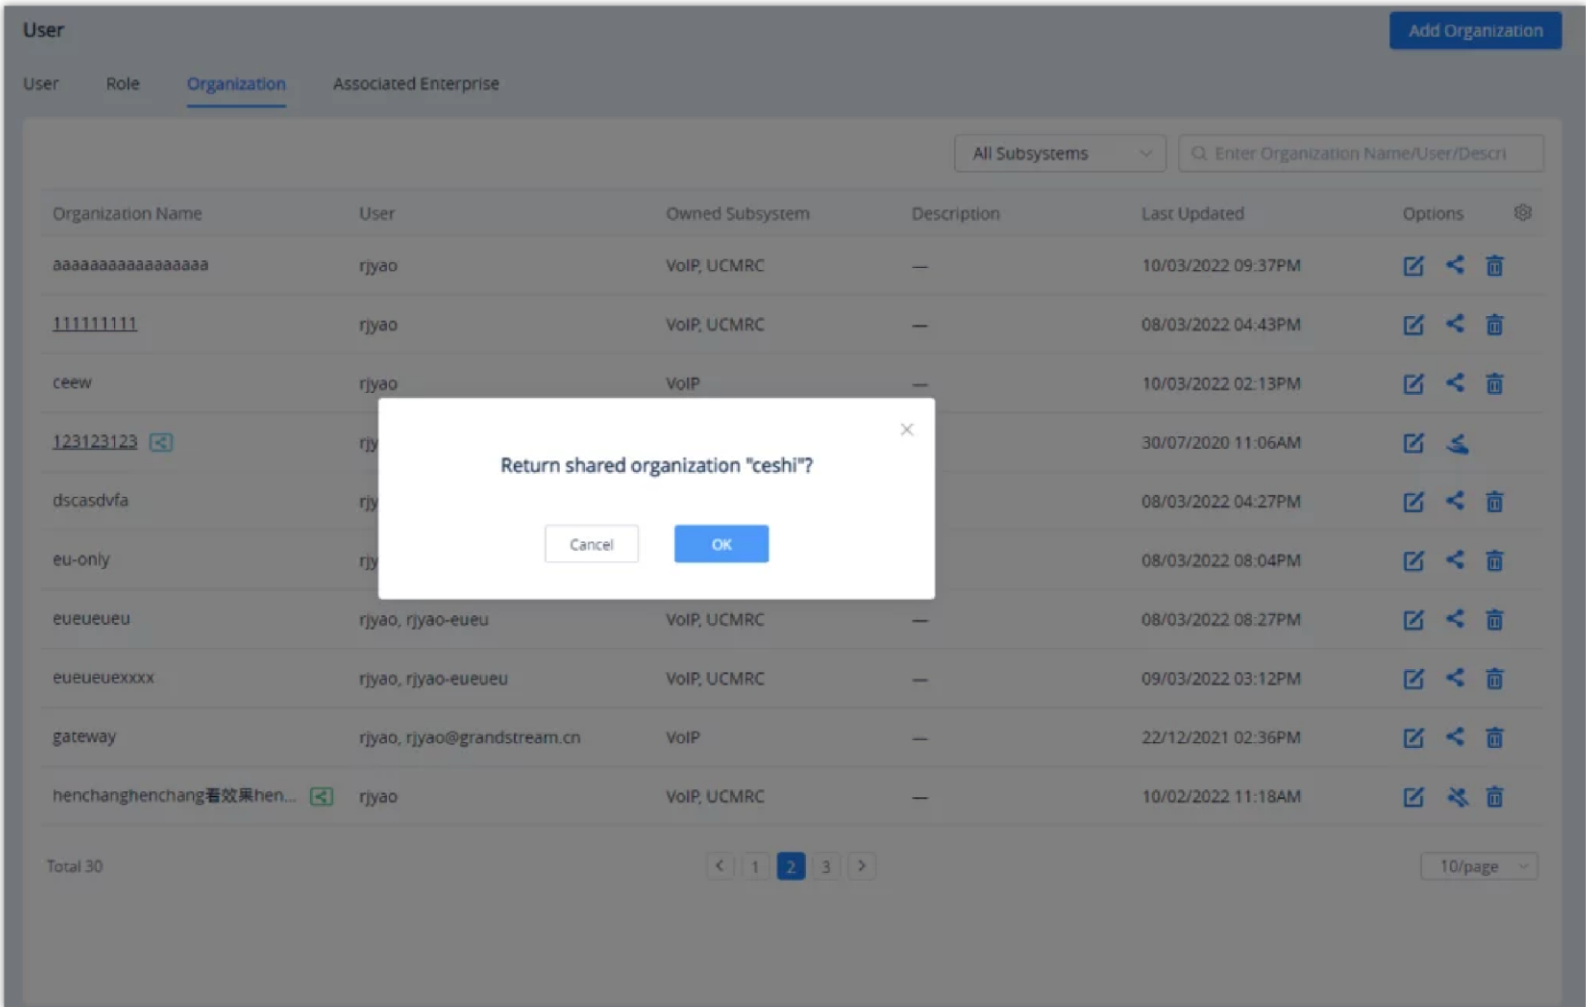


Return Organization

2. After returning the organization, the organization will be removed from the “Organization” list of the associated enterprise, and the associated enterprise will lose the management permission of the organization.


Default Organization

The user can select one organization to be the default organization. This organization will be selected by default when logging into the GDMS platform or when adding a new device. To set a specific organization as the default organization, please navigate to **Users → Organization**, then click on the button “Default Organization”.

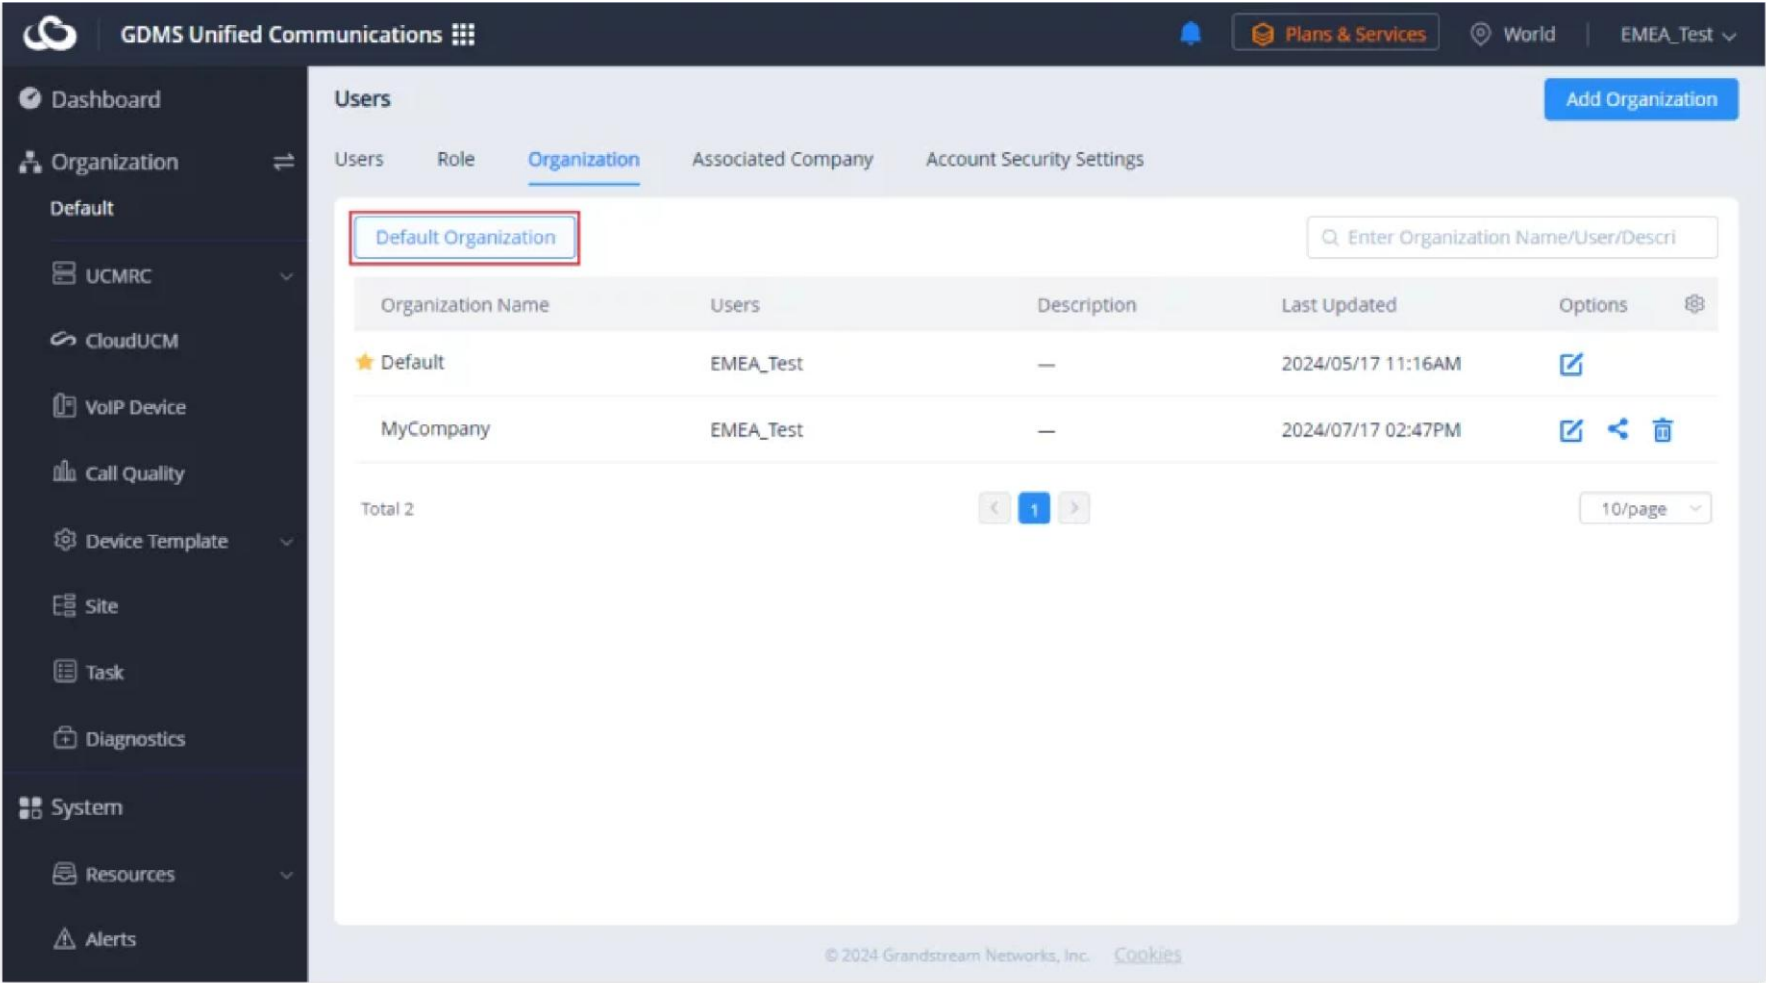

Organization

Then from the list of organizations, please choose the organization that you want to make as the default organization.

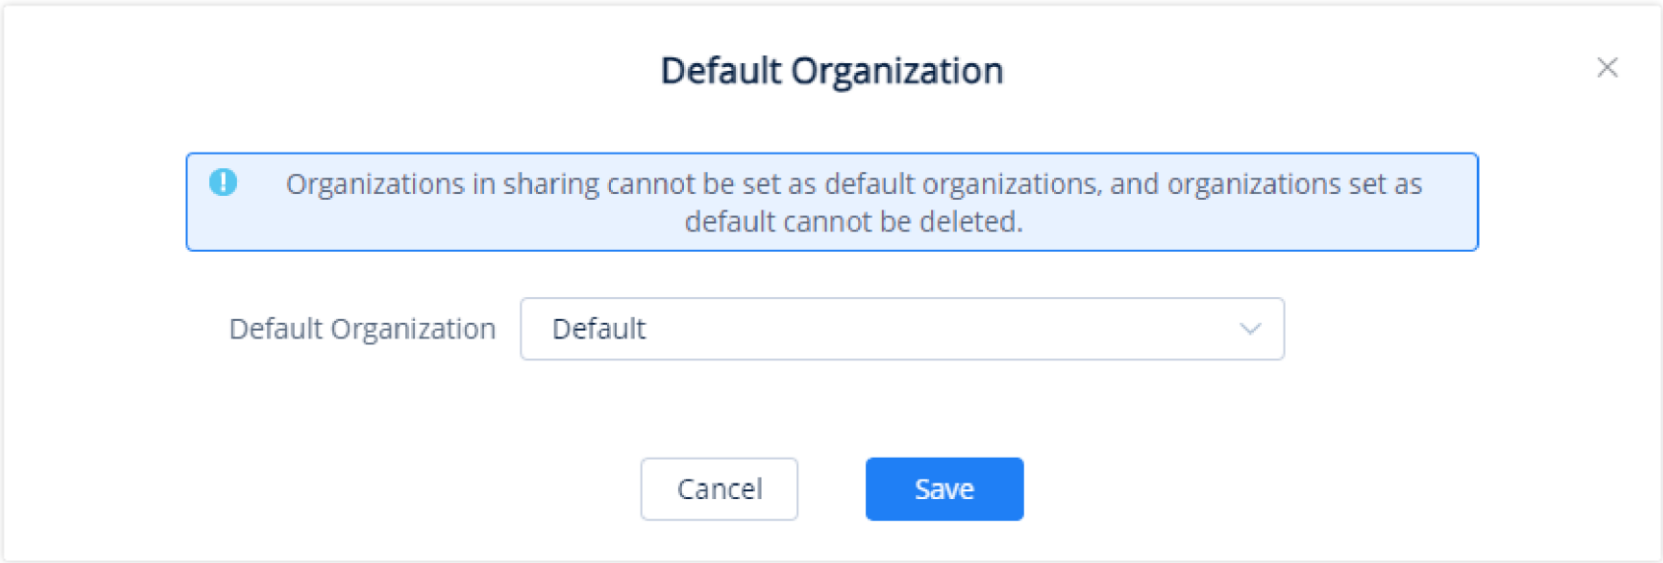

Default Organization

System Log


Users can view comprehensive system operation logs, which are organized into the following categories, including but not limited to:

Login & Security	• Incorrect password entry • Multi-factor authentication errors • IP whitelist violations • Silent user login failure/success
Remote Access	• Remote access to PBX • Remote access to VoIP device
System & Service Management	• Start/Stop CloudUCM • Start Diagnostics • System Status Diagnostics • Upload Backup File • Upload Custom Firmware

	• Upload Resource File
Device Management	• Set Parameters • Transfer VoIP Devices • Turn On/Off Call Quality • Upgrade VoIP Device Firmware • VoIP Device Assign Site • VoIP Device Configure Account • VoIP Device Factory Reset • VoIP Synchronize Device Local Configuration
Organization & Template Management	• Shared Organization • Site Template – Add • Site Template – Delete


On the menu at the right side of the page, select System Management → System Log, and users can view all operation logs of the system. Users could also search the operation logs by level, operation contents, operators, and time.

 Users could only view the system logs for the last 30 days.

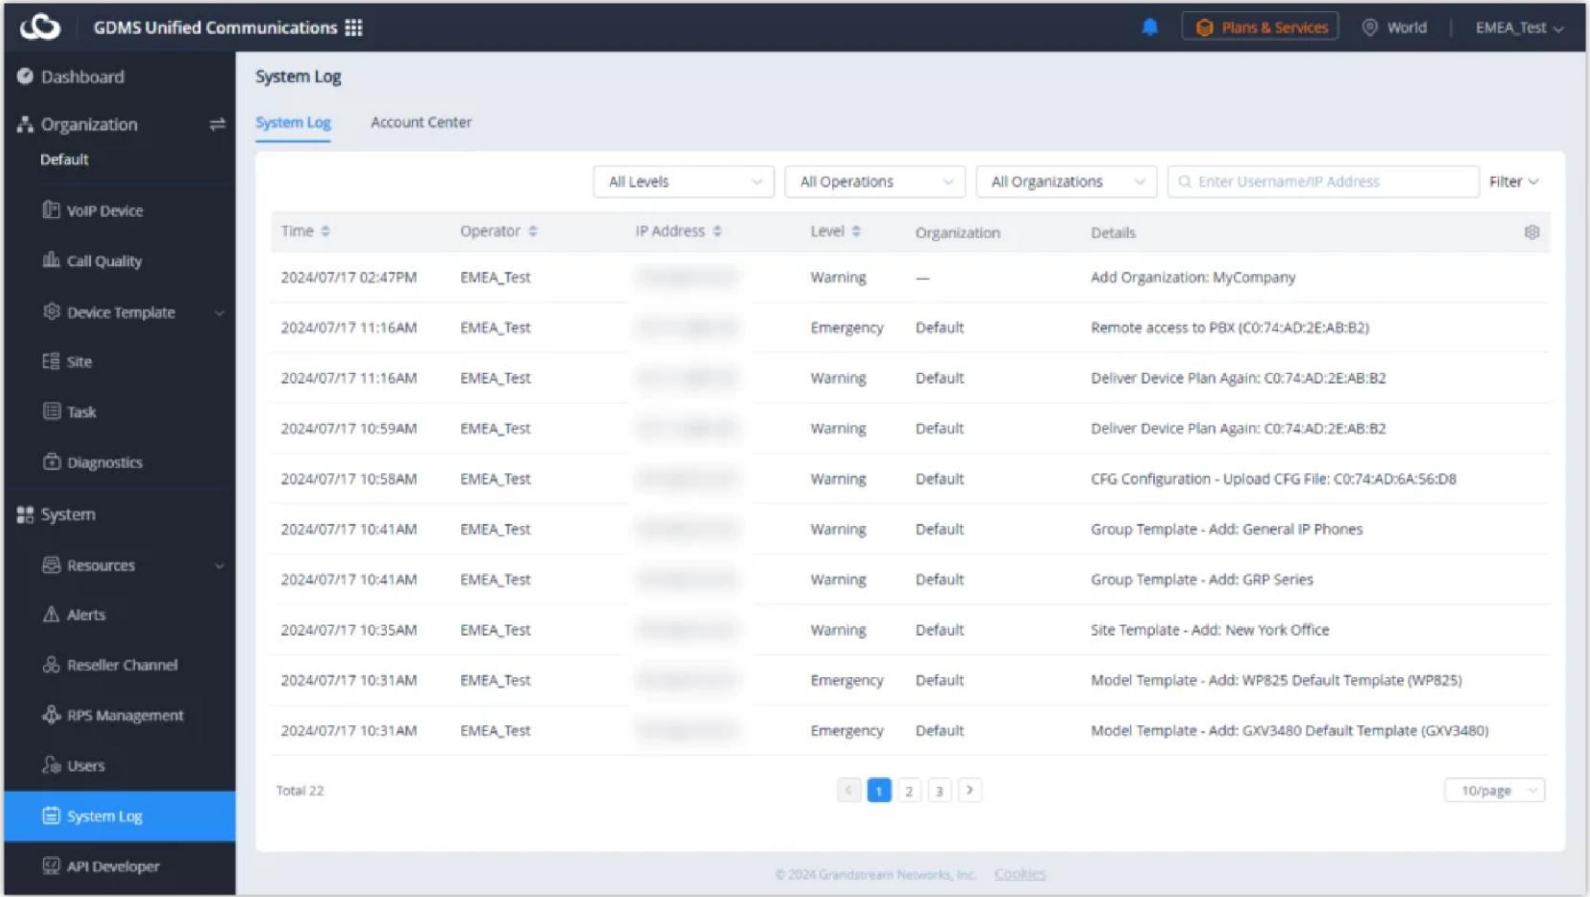

System Log

Plans & Services

Users can click on the button  in the top right corner to view UCM RemoteConnect plans and the services offered with each plan. When the user clicks on  he/she will be able to view general information about the types of purchased plans.

My Plans						
			All Statuses	Q Enter MAC/Device Name		
Plan	Owner	Subscription Time	Expiration Time	Status	Options	
UCM RemoteConnect Enterprise Cloud IM Service	(C0:74:AD:7D:B3:7A) Organization: Default Grandstream	2022/08/15	2024/08/15	Active	  	
Total 1		  			10/page	

RemoteConnect Plan

- To view the history of all purchases, the user should click on



.

- To ask for help to purchase a RemoteConnect plan, the user should click on



.

- To edit Cloud IM settings, the user should click on



.

By hovering over with the mouse pointer and clicking on  UCM RemoteConnect Services you will access the UCM RemoteConnect website, on which the user can find all the details of the services provided by RemoteConnect.

Info

The user can access the UCM RemoteConnect by typing the address <https://ucmrc.gdms.cloud/home> in the address bar in the web navigator.

UCM RemoteConnect Plan

- Supports only UCM63XX. When the user adds the UCM63XX device to the GDMS platform, the user can apply for a UCMRC advanced plan for a free trial.
- Complete NAT penetration mechanism. Users can use it directly without complicated configuration, so it can ensure the remote communication requirements through external networks (including Wave application in mobile phones/desktop clients for registration/communication through external networks).
- **IPPBX Remote Management:** There are 3 levels according to the plans, including View device information (e.g. Firmware version), SIP accounts synchronization, remote restarting the IPPBX device, upgrading IPPBX, and remote access to the IPPBX Web UI.
- GDMS Cloud Storage service is provided with bonus cloud storage space. This is used for backup configuration files and user data for IPPBX.
- IPPBX data statistics report is provided and sent to the administrator through email.
- UCM Cloud IM Plan provides cloud IM communication services for IPPBX devices. After purchasing this plan, Wave users can use the cloud IM system, and the chat data will be stored in the cloud system.

Notes

- Users can view the details of different plans on the official website.
- Users can only apply for the free trial of the UCMRC advanced plan once for each IPPBX device that is associated with the GDMS platform. If the user purchases a UCMRC plan that is different from the free trial plan, the current free trial will expire and the purchased UCMRC plan will take effect immediately.
- Please refer to the UCM63xx User Guide on the official website for details about Using the remote call function on the UCM/Wave application, backup files to GDMS cloud storage space, restoring backup files, and viewing the details of remote call records.

CloudUCM Service Plan

CloudUCM is a cloud PBX solution that provides a scalable and secure business communication and collaboration platform with powerful features and integrations that enable teams to be more productive than ever before. This cloud PBX unifies all business communication into one centralized solution that provides voice and video calls, meetings, chat, data, analytics, mobility, surveillance, facility access, intercoms, and more. CloudUCM supports all SIP endpoints and the Wave app for desktop, mobile, and web, allowing teams to communicate and collaborate from anywhere on nearly any device. This scalable solution can be easily expanded at any time without the need for extra equipment, provides enterprise-level security and reliability, and supports powerful third-party integrations and expansions. By providing a state-of-the-art suite of communication and collaboration features, bank-grade security, advanced customization, and a variety of plan options, CloudUCM is the ideal PBX solution for small-to-medium-sized businesses, retail, hospitality, and residential deployments.

Please refer to the [CloudUCM Plans](#) page for more details on the CloudUCM service plans offered.

UCM Cloud IM Service Plan

UCM CloudIM Plan provides cloud IM communication services for IPPBX devices. After purchasing this plan, Wave users can use the cloud IM system, and the chat data will be stored in the cloud system. UCM Cloud IM service is an add-on service of the UCM RemoteConnect plan, and it provides cloud IM communication services for IPPBX devices. After purchasing a UCMRC plan that contains the Cloud IM service, the Wave user can use the Cloud IM system, and the chat data will be stored in the cloud system. UCM CloudIM Plan provides cloud IM communication services for IPPBX devices. After purchasing this plan, Wave users can use the cloud IM system, and the chat data will be stored in the cloud system.


- Supports unified communication across multiple IPPBX devices in different regions.
- Provides cloud communication service with high performance, large storage, and multi-function.
- Starts to use UCM CloudIM service, which is not limited by the performance and storage space of IPPBX devices. Phone calls and messages are not affected by each other.

- The user needs to purchase the UCM RemoteConnect plan which contains the Cloud IM service. After purchasing the plan, the user needs to enable the service on the GDMS platform before using the service.
- After enabling the UCM CloudIM plan in the IPPBX device, all chat data will be stored in the cloud system. The local chat history will not be viewable.
- Each UCM CloudIM plan can be bound to the multiple IPPBX devices in a certain enterprise so that the users of the multiple IPPBX devices can send IM messages, create groups, send meeting notifications to each other, etc.
- When the UCM RemoteConnect plan which contains the Cloud IM service expires, the Wave user will have to either renew his subscription using a plan that supports the CloudIM or purchase the CloudIM add-on.

Enable Service

Prerequisite: The IPPBX plan contains the permission for this function.

1. The user can click the button



to access the "My Plans" list, select a UCM RemoteConnect plan that contains the Cloud IM service, and enable the Cloud IM service on the GDMS platform.

My Plans

All Statuses

Enter MAC/Device Name

Plan	Owner	Subscription Time	Expiration Time	Status	Options
UCM RemoteConnect Enterprise Cloud IM Service	(C0:74:AD:7D:B3:7A) Organization: Default Grandstream	2022/08/15	2024/08/15	Active	

Total 1

<

1

>

10/page

My Plans

2. The user can click the button



to access the “Edit Cloud IM” interface. Please see the screenshot below:

Edit Cloud IM

Cloud IM

Region

US Region

* Enterprise Name for the Plan

* Cloud IM maximum storage space (MB)

Used 0MB

Available storage space is 52224 MB.

Cancel

Save

Edit Cloud IM

Enable Cloud IM	After purchasing a UCMRC plan that contains the Cloud IM service, the user needs to enable the Cloud IM service on the GDMS platform. Note: If the user wants to disable the Cloud IM service which is currently in use and will no longer use it, the data in the Cloud IM server will be cleared after disabling it.
Region	US Region / EU Region Note: - It is recommended to select the nearest region to the IPPBX device. - If the user switches to another region, the data in the Cloud IM server will be cleared.
Enterprise Name	The user can customize the name of the enterprise which will use the Cloud IM service.
Cloud IM Maximum Storage Space	The user can edit the maximum available storage space for the Cloud IM service. Note: - The user needs to allocate some space from the cloud storage space for Cloud IM service usage. - The configured storage space must be larger than the space currently used by the Cloud IM service and smaller than the available cloud storage space.

Edit Cloud IM

On the IPPBX Devices list, the user can click to view the plan information of the selected device and enable the Cloud IM service for the specific device.

☐	MAC Address	Device Model	Firmware Version	Server Address	Plan	Site Name	Options
☐	C0:74:AD:2E:B2:C6 duwei	UCM6302	1.0.15.11	c074ad2eb2c6.b.gdms.cloud:5061(TLS)	Enterprise	Default	  
☐	C0:74:AD:45:4E:44	UCM6301	—	—			  
☐	00:0B:82:A4:6E:B9 杨玉	UCM6302	1.0.15.5	000b82a46eb9-11			  
☐	C0:74:AD:0A:8E:9A '8.#96'	UCM6308	1.0.11.9	000b82a46eb9-11			  
☐	C0:74:AD:29:6B:00	UCM6308	—	—			  

Access Server ☒

c074ad2eb2c6.b.gdms.cloud (Wave App User Guide)

c074ad2eb2c6.b.gdms.cloud:5061 (SIP Configuration Guide)

Storage Space 0B/10.00GB

Total Sessions 64 (Maximum Number of Concurrent Remote Sessions)

Device Plan UCM RemoteConnect - Enterprise (12/05/2024 expires)

10.00GB Cloud Storage Space

Cloud IM Service (12/05/2024 expires)

Pending Delivery

IPPBX Device → Enable Cloud IM

3. Click the “**Save**” button to get the UCM Cloud IM Service, and the user can view the Cloud IM service domain name, service ID, and Key.



Apply successfully!

Service Domain im.gdms.cloud

Service ID 100008

Service Key 07b2b2773b1232328c7852c

Expiration Time 2021/07/11

You can copy the above information to bind CloudIM plan in UCM device, or bind it in GDMS now.

[More](#)

Bind UCM Device

Not now

CloudIM Credentials on Web Interface

4. The user can quickly bind the IPPBX device for the Cloud IM service so that the IPPBX device can start to apply the Cloud IM service quickly.

Bind UCM Device

A CloudIM account supports binding multiple cross-region UCM devices, and can also be bound on the UCM device management platform.

Enter the department, MAC address of the device and dial prefix

US-UCM

C0:74:6D:0A:8E:88 (sqhu

99

×

CN-UCM

C0:74:AD:06:9B:7D

88

×

+ Add Device

Cancel

OK

Bind IPPBX Device

Note

The user can also copy the service ID and service key and bind the IPPBX device to the IPPBX device management platform. The user can go to the **IPPBX Web UI** → **System Settings** → **Cloud IM** interface and enter the Cloud IM-involved information in the blanks. The corresponding IM data are placed in the Cloud IM external server.

IM Settings

Cloud IM Service

IM Server

Enable Cloud IM:

☒

Local Proxy:

☐

* Cloud IM Server Address:

To view the external CloudIM server address, please go to [RemoteConnect](#)

* Service ID:

* Key:

* Department Name:

Trusted User:

Prepend:

Bind IPPBX Device on Web UI

- The bound IPPBX device also needs the UCMRC plan which contains the Cloud IM service.
- For the Cloud IM service in the UCMRC plan free trial, when the free trial expires, the user cannot use the Cloud IM service on the GDMS platform, and if the user wants to use the IPPBX device data in the Cloud IM service in the UCMRC plan free trial, the user needs to transfer the data to the newly purchased Cloud IM service.

View UCM CloudIM Plan Service ID and Key

In “My Plan” interface, find the UCM CloudIM plan, and click the icon  to view the service domain name, service ID, and Key of this plan.

My Plans > Plan Details

Cloud IM

Service Domain: im1.gdms.cloud

Plan Storage: 11MB (0B Used — 0%)

Service ID: 100070

Service Key: 87ded199300c4e909908b7f4db7c7c98

Order ID	Plan	Type	Subscription Time	Expiration Time	Options
16311909435628432	Enterprise UCM RemoteConnect Additional 100 Concurrent Remote Sessions Concurrent Remote Sessions 100GB Storage Cloud Storage Space	Upgrade	09/09/2021	14/04/2025	

View Service ID and Key

 If the storage space of this plan is full, the user cannot send files and pictures.

Manage Bound IPPBX Device

1. In My Plan interface, find the UCM CloudIM plan, and click the icon



UCM RemoteConnect	UCM6302 (00:0B:82:A4:6E:BF)				
Enterprise	Organization: Default	26/08/2021	26/08/2022	Active	  
Cloud IM	yyy				
	UCM Device: 1 				

Find UCM CloudIM Plan

2. View the IPPBX devices that are bound to the UCM CloudIM plan. It allows users to add/delete devices. Please see the screenshot below:

Bind UCM Device

A CloudIM account supports binding multiple cross-region UCM devices, and can also be bound on the UCM device management platform.

2021/03/26

US-UCM

00:0B:82:9A:95:10

99

Enter the department, MAC address of the device and dial prefix ?

CN-UCM

C0:74:AD:06:9B:7D

88

+ Add Device

Cancel

OK

View Bound IPPBX Devices

Department Name	Enter the name of the department using this IPPBX device so that the contact details in the Wave application can be viewed.
UCM MAC Address	Enter the MAC address of the IPPBX that uses the UCM CloudIM plan. It only supports the IPPBX devices which have been associated with the GDMS platform. Note: - For the IPPBX devices which have not been associated with the GDMS platform, the user can only log in to the UCM management platform to configure the Cloud IM services. - The bound IPPBX device also needs the UCMRC plan which contains the Cloud IM service.
Dial Prefix	The dial prefix required to dial this IPPBX device must be the same as the trunk dial prefix configured in the IPPBX. Please refer to the UCM &GCC Administration Guides for more details. For example, there are IPPBX A, IPPBX B, and IPPBX C. If the configured prefix of IPPBX B and C to dial A is 99 (configured trunk), then when the user adds IPPBX A, the user needs to configure the dial prefix to 99.

Note

If the user adds/deletes/edits department names, the status will show as the icon  until the IPPBX is online and synchronized, and then the updates will be applied.

Edit Enterprise Name

1. In My Plan interface, find the UCM CloudIM plan, and click the icon

UCM RemoteConnect Enterprise Cloud IM Service	UCM6302 (00:0B:82:A4:6E:BF) Organization: Default yyy UCM Device: 1 	26/08/2021	26/08/2022	Active	  
---	--	------------	------------	--------	---

Find UCM Cloud IM Plan

2. The user can modify the name of the enterprise, and the new name will be applied immediately.

Edit Enterprise

Currently, the enterprise name is only used to remark the UCM CloudIM plan, and it will not be displayed elsewhere.

Cloud IM Maximum Storage Space

1. In the “My Plans” interface, find the UCM Cloud IM Service, and click the icon



UCM RemoteConnect Enterprise Cloud IM Service	UCM6302 (00:0B:82:A4:6E:BF) Organization: Default yyy UCM Device: 1 link	26/08/2021	26/08/2022	Active	info cart edit
---	---	------------	------------	--------	--

Find UCM Cloud IM Plan

2. The user can modify the maximum storage space of the Cloud IM service. The configured Cloud IM service usage storage space must be smaller than the currently available storage space and larger than the currently used storage space.

Cloud IM Maximum Storage Space

Notes

- The user needs to allocate some space from the cloud storage space for the Cloud IM service usage.
- If there is no more available cloud storage space, the user can contact the device distributor to upgrade the UCM RemoteConnect plan to a higher-level plan or purchase an add-on storage space plan to obtain more cloud storage space.

IM File Limit

The user can set the maximum limit size of the file that the user can send at one time. To set the limit, please refer to the screenshot below.

Edit Cloud IM

Cloud IM

Region

Select

* Company Name for the Plan

* Cloud IM maximum storage space (MB)

Used MB

Available storage space is MB.

Message Read Receipt

* Chat File Limit (MB) ?

50

Cancel

Save

- **Chat File Limit (MB):** The single file size limit in the Wave instant chat. The size limit is between 10 MB and 100 MB. It also cannot be greater than the total size of Cloud IM’s Maximum Storage Space.

Synchronize IPPBX Data in Cloud IM Service Free Trial

For the Cloud IM service in the UCMRC plan free trial, when the free trial expires, the user cannot use the Cloud IM service on the GDMS platform, and if the user wants to use the IPPBX device data in the Cloud IM service in the UCMRC plan free trial, the user needs to transfer the data to the newly purchased Cloud IM service.

GDMS Unified Communications

Plans & ServicesWorldEMEA_Test

Dashboard

Organization

Default

Task

Diagnostics

System

Resources

Firmware

Other Resources

Storage Space

Alerts

Reseller Channel

RPS Management

Users

System Log

API Developer

My Plans

All PlansAll StatusesEnter MAC/Device Name

Plan	Owner	Subscription Time	Expiration Time	Status	Options
UCM RemoteConnect Plus	UCM6302 (C0:74:AD:2E:AB:...) Organization: Default	2024/07/16	2024/10/16	In Trial	
CloudUCM Startup	CloudUCM (00:0B:82:07:00:...) Organization: Default	2024/07/16	2024/08/16	In Trial	

Total 2

<1>

10/page

© 2024 Grandstream Networks, Inc.

Cookies

Cloud IM Service Free Trial

1. The user can hover the mouse pointer on




click the button

to access the “My Plans” interface, select the previous Cloud IM service on the list of the plans, click the button




and select the newly purchased Cloud IM service so that the IPPBX device data in the previous Cloud IM service will be transferred to the newly purchased Cloud IM service.

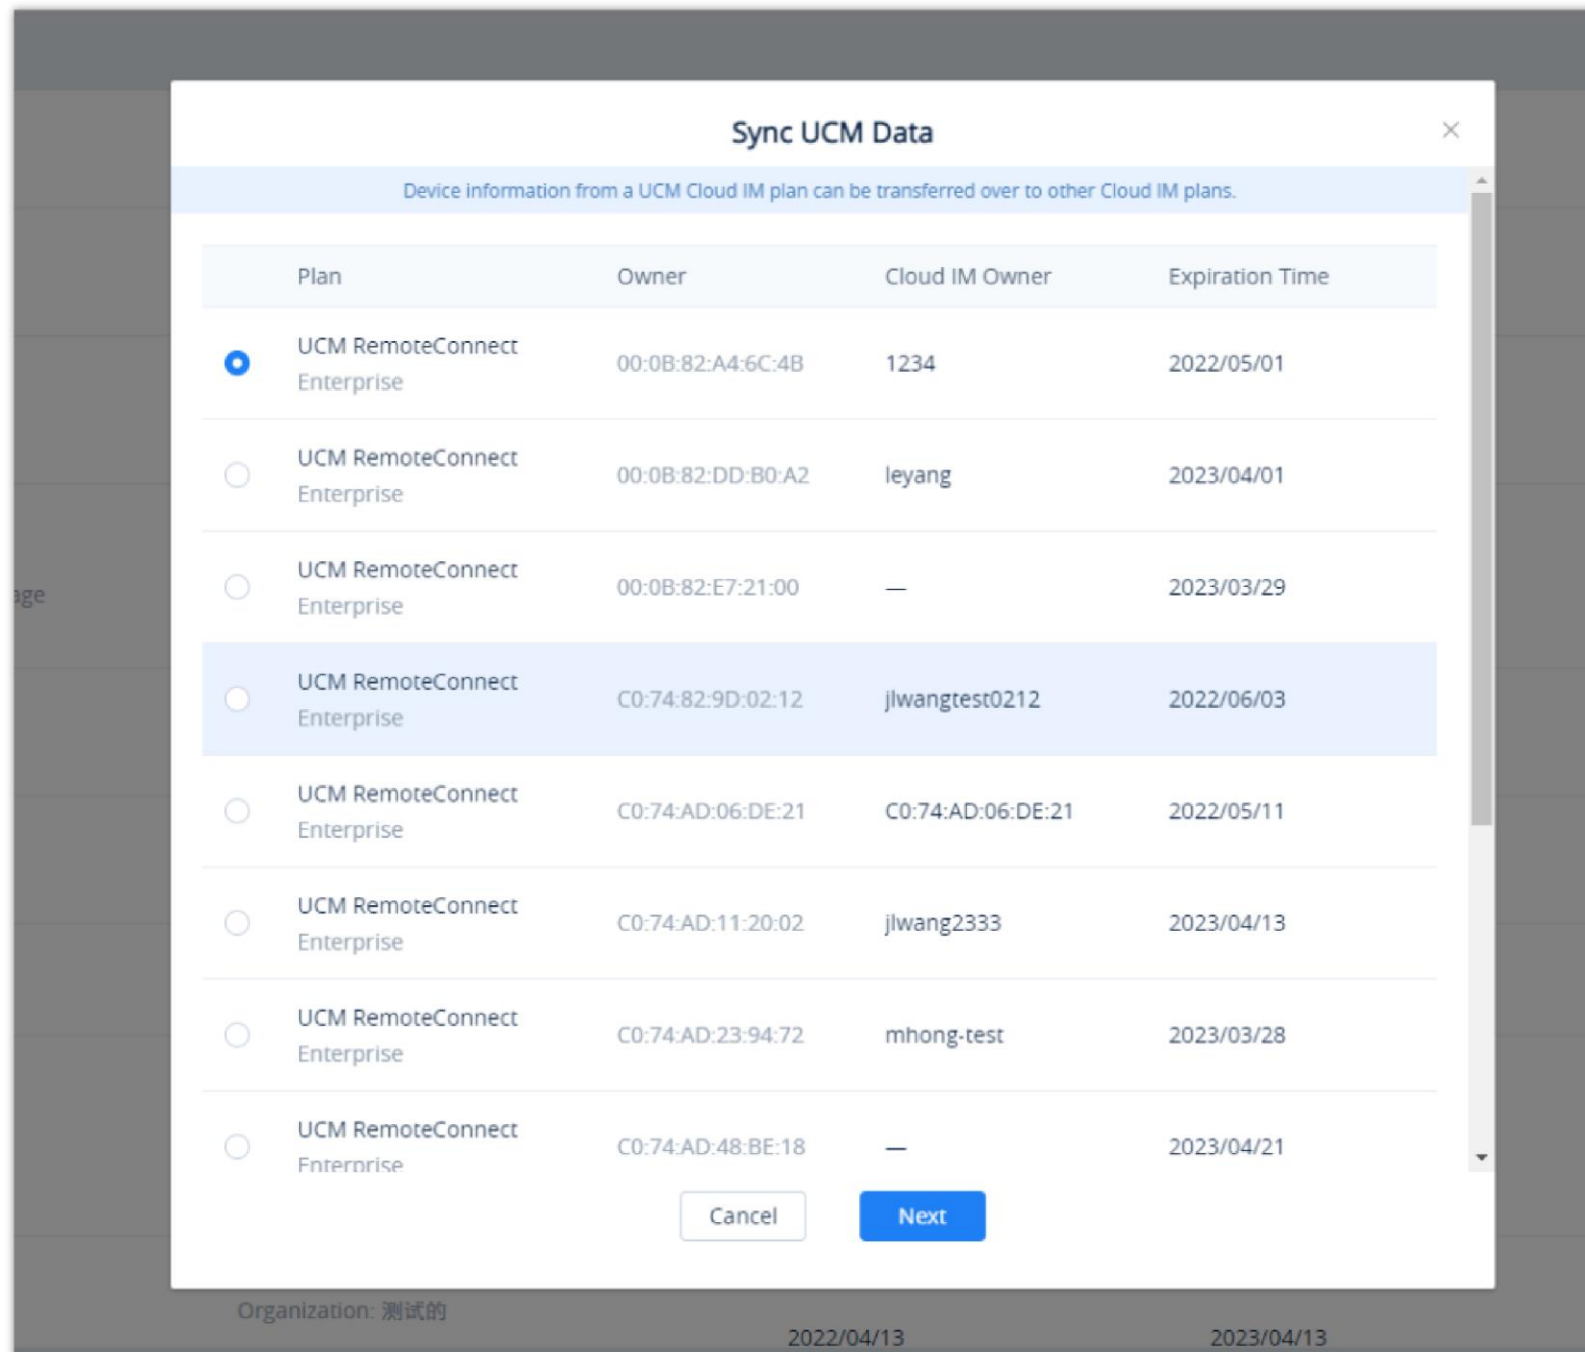

Sync IPPBX Data

2. The user needs to select the main plan that contains the Cloud IM service, click the button **Next** to access the Cloud IM service editing interface, and the user can customize the enterprise name, and allocate the maximum storage space for the Cloud IM service.

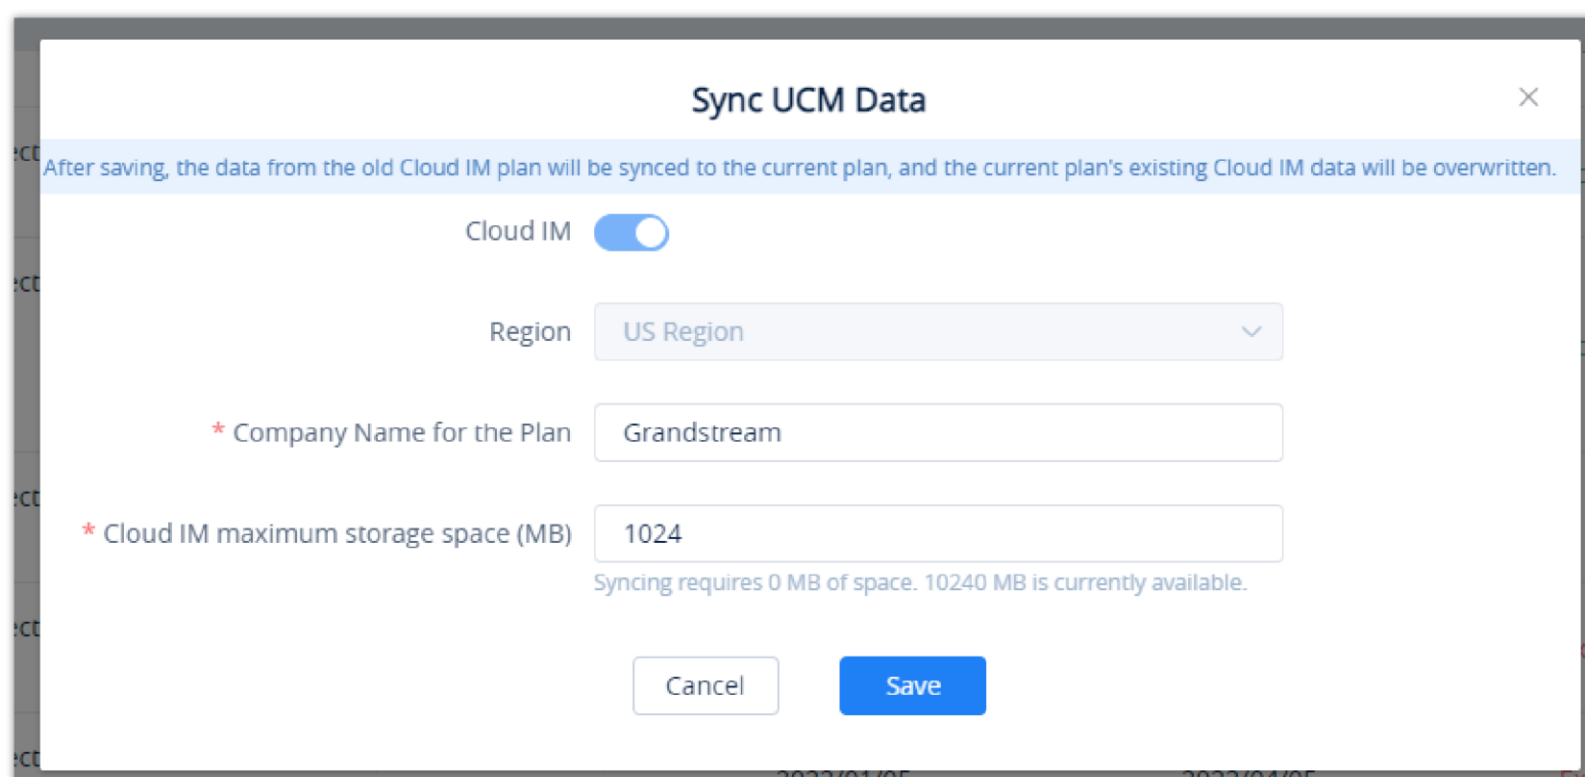

Sync IPPBX Data Edit Cloud IM

3. After clicking the “Save” button, the IPPBX device data in the previous Cloud IM service will be transferred to the newly purchased Cloud IM service of the UCMRC plan.

Note

- If the newly purchased Cloud IM service has been enabled and there is some existing data in the service, after transferring the IPPBX data to the Cloud IM service, the data in the newly purchased Cloud IM service will be cleared.
- If the previous Cloud IM service has expired over 1 month, the synchronized IPPBX data will not contain the chat history and files, and it will only synchronize the IPPBX device information.

Purchase Service

Users can purchase one or more UCM RemoteConnect plans and assign them to the corresponding UCM63XX devices. If the user wants to purchase a UCM RemoteConnect plan, the user needs to contact the device distributor to learn more details about the plan and purchase the plan. The GDMS platform does not provide the purchasing service online. Users can purchase one or more UCM RemoteConnect plans and assign them to the corresponding UCM63XX devices.

Note:

If the user cannot contact the device distributor, the user can access the "IPPBX Devices" list → Plans or by hovering on  **Plan & Services** the clicking on  **My Plans** to view the "My Plans" list and click the button  to access purchasing interface. Then, the user can click the "Help" button so that the GDMS platform will inform the device distributor to contact the user as soon as possible.

Purchase Plan

UCM RemoteConnect plans are sold by authorized dealers. [View All Plans](#)
Please contact the dealer from whom you originally purchased the UCM device from to order a UCM RemoteConnect plan.


Ask for Help:

☒ I want to purchase a UCM RemoteConnect plan, but I cannot contact the dealer.
☐ I have questions about the plan specifications.
☐ Other problems

Cancel

OK

Services Interface

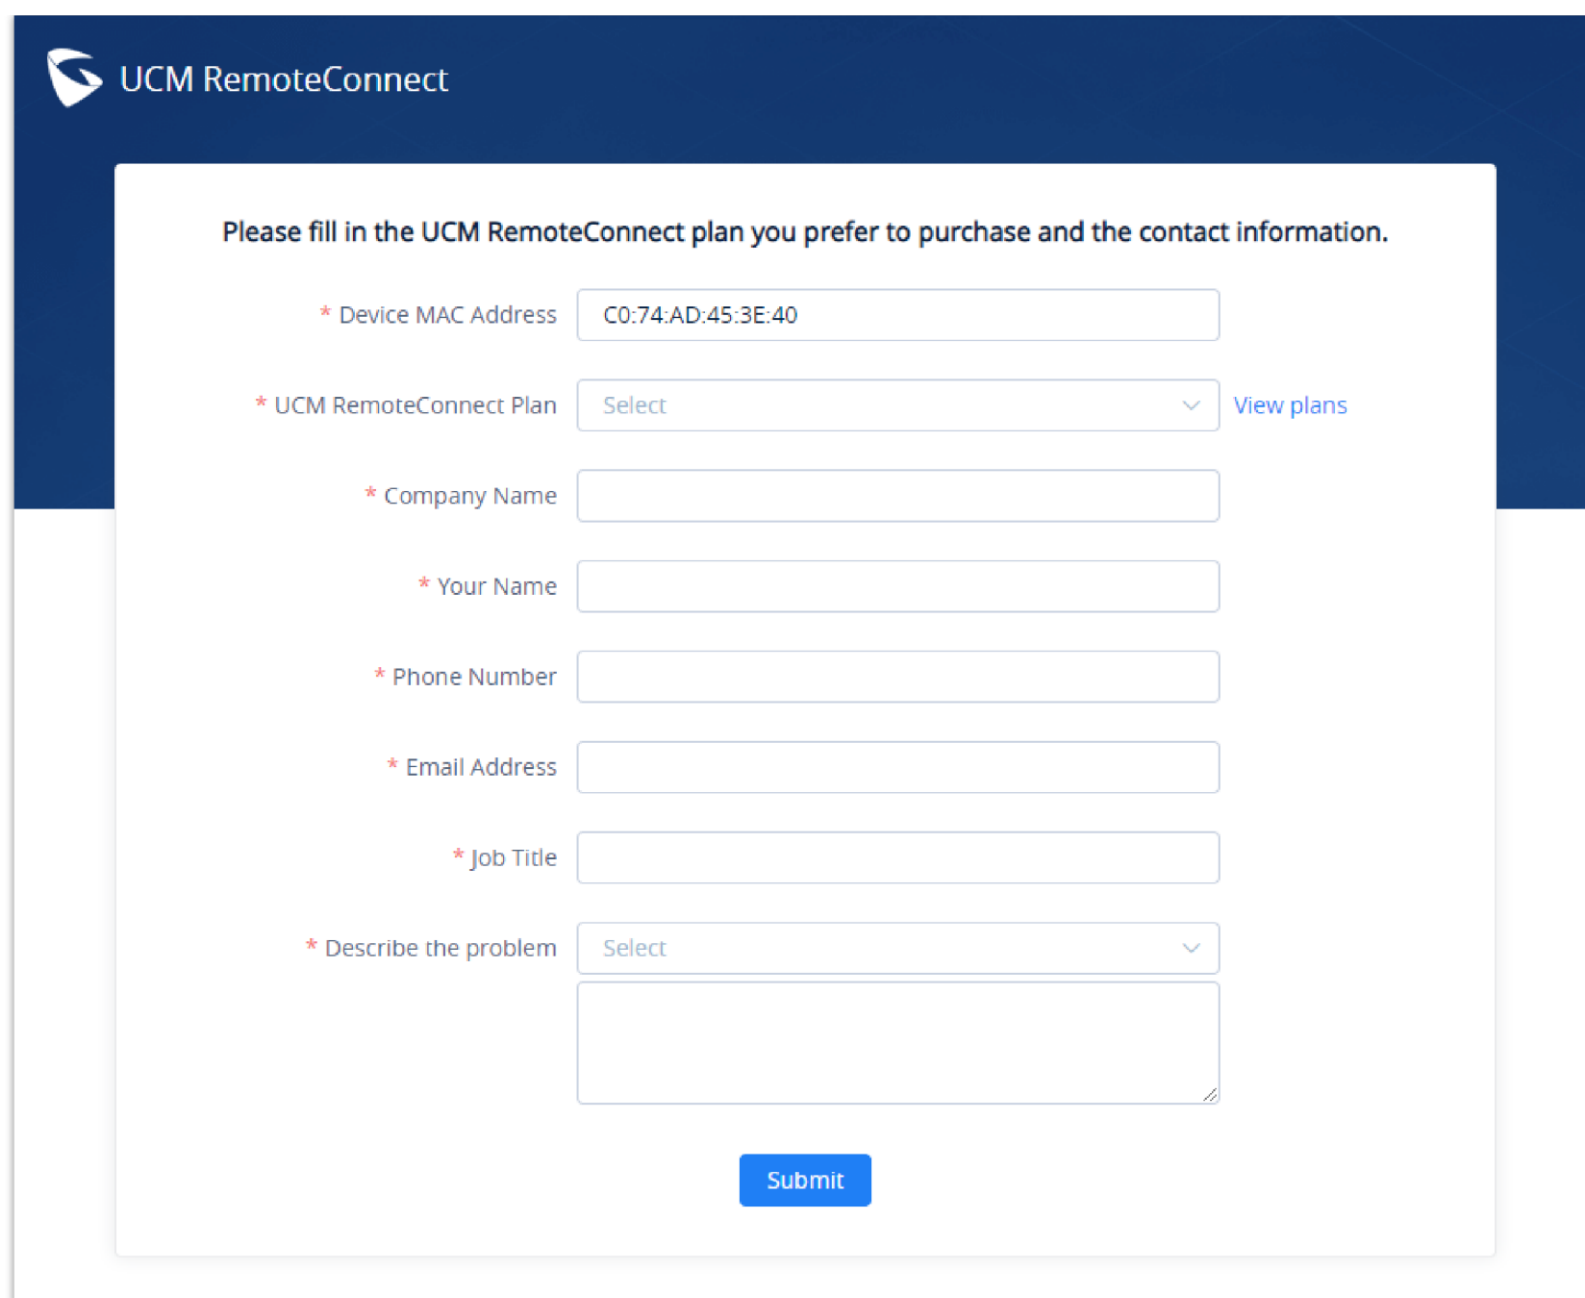

UCM RemoteConnect

Please fill in the UCM RemoteConnect plan you prefer to purchase and the contact information.

* Device MAC Address

* UCM RemoteConnect Plan [View plans](#)

* Company Name

* Your Name

* Phone Number


* Email Address


* Job Title

* Describe the problem

RemoteConnect Plan Purchase Form

View My Plans

Click on the **Plan and Services**  on the upper right corner, the click on . This page displays all purchased plans by the current enterprise.

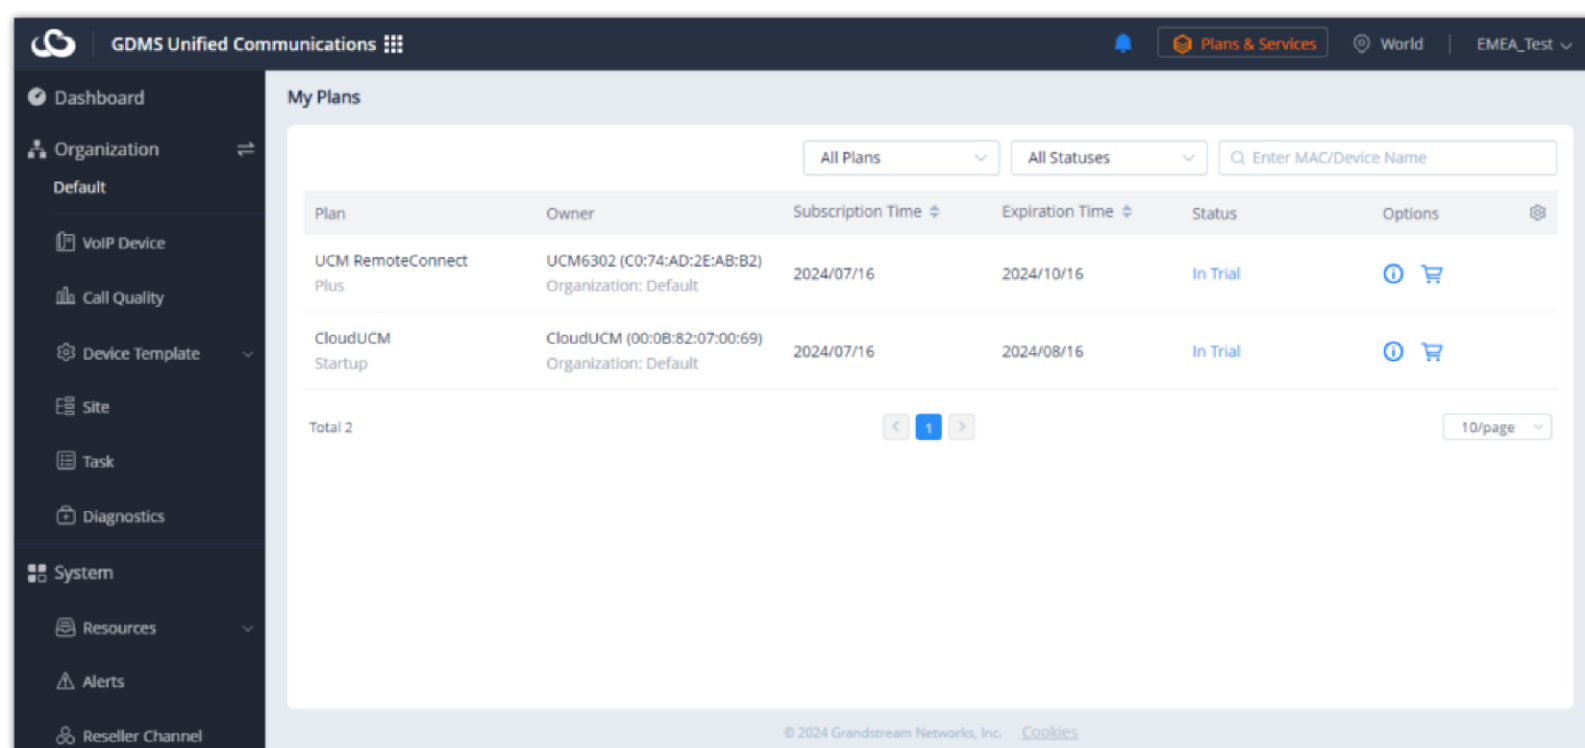

GDMS Unified Communications

Plans & Services World EMEA_Test

Dashboard Organization Default VoIP Device Call Quality Device Template Site Task Diagnostics System Resources Alerts Reseller Channel

My Plans

All Plans All Statuses Enter MAC/Device Name

Plan	Owner	Subscription Time	Expiration Time	Status	Options
UCM RemoteConnect Plus	UCM6302 (C0:74:AD:2E:AB:B2) Organization: Default	2024/07/16	2024/10/16	In Trial	 
CloudUCM Startup	CloudUCM (00:0B:82:07:00:69) Organization: Default	2024/07/16	2024/08/16	In Trial	 

Total 2    10/page

© 2024 Grandstream Networks, Inc. [Cookies](#)

View UCM RemoteConnect Plans

View all plans on the Plans menu:

- Active
- Expired
- About to expire (Less than 15 days from expiration date)
- Invalid (The plan has been revoked or has not been approved)
- In trial (The plan is a free trial plan)

Notes:

1. If the user can see icon




, it means the Add-on Plan will expire soon.

UCM Remote Work	UCM6202 (C0:74:AD:06:9B:7E)	2020/06/28	2020/07/28	Active	Expire Soon	   
Silver	Organization: Default Organization					
Add-on: 50GB Storage						

IPPBX Cloud Storage Add on Plan Expiration

2. If the user can see the icon



, it indicates that the plan will expire soon. Please renew or upgrade the plan as soon as possible.

View Plan Details

On the **My Plans** interface, select a specific plan and click on the button  to view all order history of this device.

- Users could check the ID, Plan, Transaction, Type (upgrade/renew/purchase), Subscription Time, and Expiration Time.
- The user can view all the additional plans under the current plan, as well as the record of orders of the additional plans.
- The plan details contain the main plan and the add-on plan.

My Plans > Plan Details					
Cloud IM					
Service Domain:			Service ID:		
Plan Storage: nullB (0B Used —)			Service Key:		
Order ID	Plan	Type	Subscription Time	Expiration Time	Options
UCMRC-1874	Enterprise UCM RemoteConnect	Upgrade	2022/08/15	2024/08/15	
UCMRC-1020	Enterprise UCM RemoteConnect	Subscribe	2022/04/18	2022/07/18	
Total 2		  			10/page

View Plan Details

Export Receipt

The user can download the receipt for a specific plan renewal or upgrade from the plan details page.

1. View all plans for the “My Plans” menu.
2. Select



of the plan to which you want to export the receipt.

[My Plans](#) > Plan Details

Cloud IM Service Domain: Plan Storage: nullB (0B Used —) Service ID: Service Key:					
Order ID	Plan	Type	Subscription Time ↕	Expiration Time ↕	Options ⚙
UCMRC-1874	Enterprise UCM RemoteConnect	Upgrade	2022/08/15	2024/08/15	
UCMRC-1020	Enterprise UCM RemoteConnect	Subscribe	2022/04/18	2022/07/18	
Total 2		< 1 >		10/page ▼	

Export Receipt

The receipt will be downloaded as a PDF file and below is an example of a receipt



GRANDSTREAM
CONNECTING THE WORLD

UCM RemoteConnect Service Order Receipt

Service Name:

UCM RemoteConnect Service

Order Date:

Aug 15 2022

MAC Address:

C0:74:AD:7D:B3:7A

Device Type:

—

Transaction	Plan Name	Service Period
Upgrade	◆ Enterprise	Aug 15 2022 - Aug 15 2024

UCM RemoteConnect Order Receipt

Renew/Upgrade Plan


If the user wants to renew the current UCM RemoteConnect plan or upgrade it, the user needs to contact the device distributor to learn more details about the plan and renew or upgrade the plan.

Note

If the user cannot contact the device distributor, the user can access the “My Plans” interface, select the IPPBX device which the user wants to renew the plan for, and click the button to access the purchasing page.


1. Please click on the name of your plan, then select



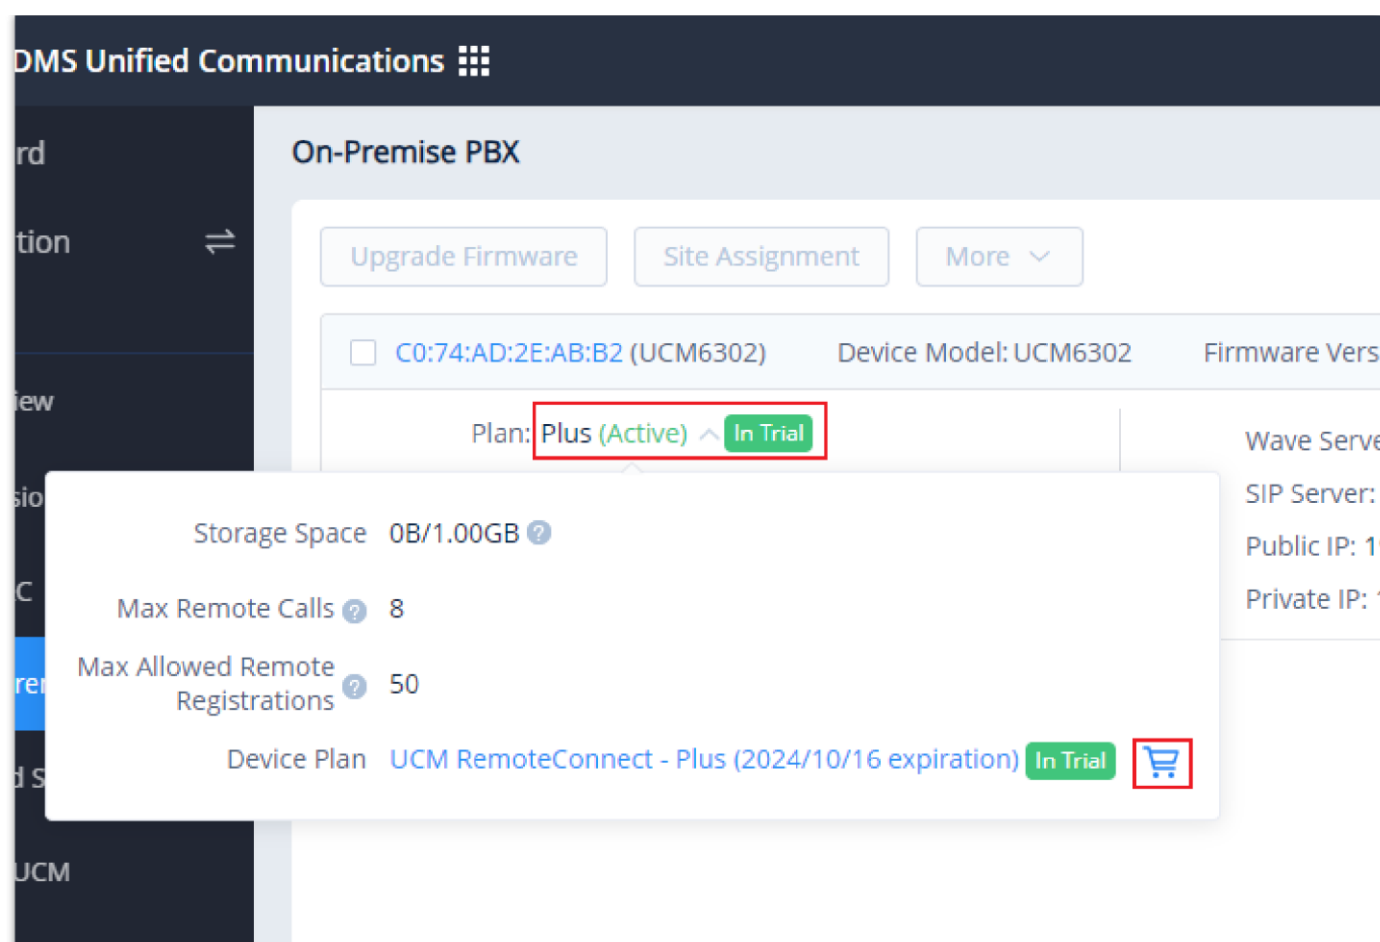

Purchase a RemoteConnect Plan

2. This window will appear, please select "I want to purchase a UCM RemoteConnect plan, but I cannot contact the dealer."

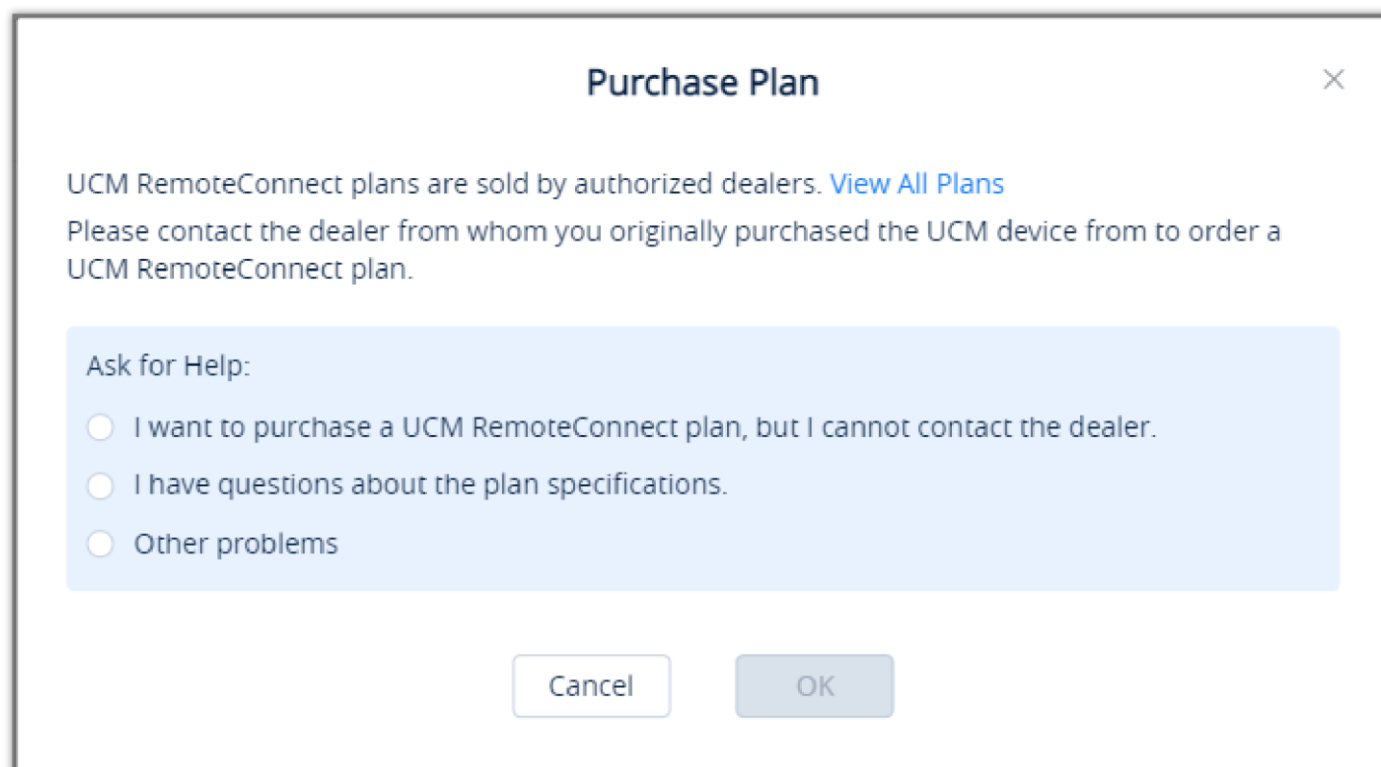

Ask for Help

3. Fill in the form with the corresponding information:

Please fill in the UCM RemoteConnect plan you prefer to purchase and the contact information.

*

 Device MAC Address

C0:74:AD:7D:B3:7A

*

 UCM RemoteConnect Plan

Select

View plans

*

 Company Name

*

 Your Name

*

 Phone Number

*

 Email Address

*

 Job Title

*

 Describe the problem

Select

Submit

Contact Form

Device MAC Address	Enter the address MAC of the IPPBX device that you wish purchase/renew/upgrade the RemoteConnect plan for.
UCM RemoteConnect Plan	Choose the RemoteConnect plan that you want to purchase/renew/upgrade to. For more information about RemoteConnect plans, please visit: https://ucmrc.gdms.cloud/plans
Company Name	Enter the name of the company.
Your Name	Enter your full name.
Phone Number	Enter your phone number.
Email Address	Enter your email address.
Job Title	Enter your job title.
Describe the problem	Give details of the problem you have encountered.

Plan Expiration Notice

If the plan in the account expires after 15 days or already expired, the user will receive a notification through registered email.

An example of a plan expired email notification:



Hi, jyang123

The following UCM RemoteConnect plan has expired. Corresponding services are no longer available.

Plan	Expiration Date	Owner	Directions
Extra 50GB Cloud Storage	2022/05/24	C0:74:AD:12:03:35 UCM6202 Organization: 3—ytesy	Exceeding storage space:0GB

Tip: When the plan expires, the files that exceed the storage space will be deleted. Please backup in advance. If the UCM device is set with a custom access address, the address will be deleted. You can click [here](#) to see more details about the effect of plan expiration.

You can log in <https://www.gdms.cloud/plan/myPlan> to view the plan details and contact the device channel partner to renew the plan.

This is an automatically generated email. Please do not reply.

[About Us](#) | [Contact Us](#)

Copyright © 2022 Grandstream Networks, Inc. All rights reserved.

Plan Expiration Notice



- Once the plan expires, the files that exceed the maximum storage space will be deleted after 7 days. Please download the files as soon as possible or renew them in advance.
- Once the plan expires, if the user configures a custom access server address for the IPPBX device, the custom access server address will be deleted after 7 days.
- If the previous Cloud IM service has expired over 1 month, the synchronized IPPBX data will not contain the chat history and files, and it will only synchronize the IPPBX device information. If the user renews the UCMRC plan which contains the Cloud IM service within 1 month, the chat history and files will be preserved.

Multi-Factor Authentication

GDMS enforces multi-factor authentication (MFA) for all accounts as a mandatory security measure. Upon first login, users are prompted to configure an MFA method. The available methods may vary depending on the authentication policy set by the administrator.

For detailed information on supported MFA methods, device setup, administrator configuration, and troubleshooting, refer to the GDMS MFA Device User Guide.


[GDMS MFA Device – User Guide](#)

API Developer

GDMS platform opens API interfaces for public users. Users can apply for API Developer to use the services. Users can click to view the details about API interfaces.


API document access address: <https://doc.grandstream.dev/GDMS-API/>

- Click on “**API Developer**” on the menu on the left side and click to apply for API Developer.

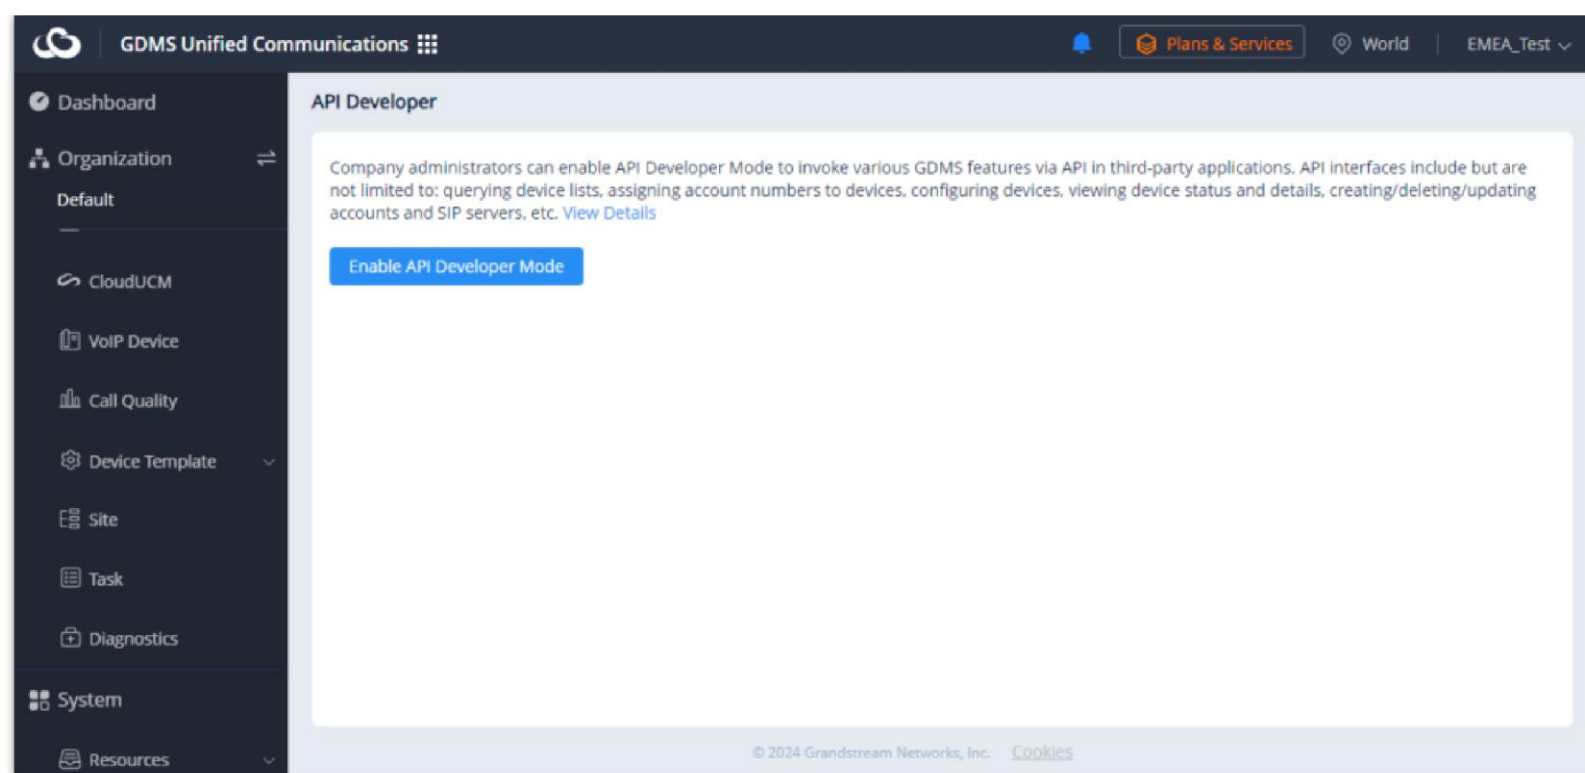

API Developer

- Click on “Apply for API Developer”, the GDMS platform will assign the API Client ID and secret key to the GDMS account, and the GDMS account can use the API Client ID and secret key to invoke the API interfaces.

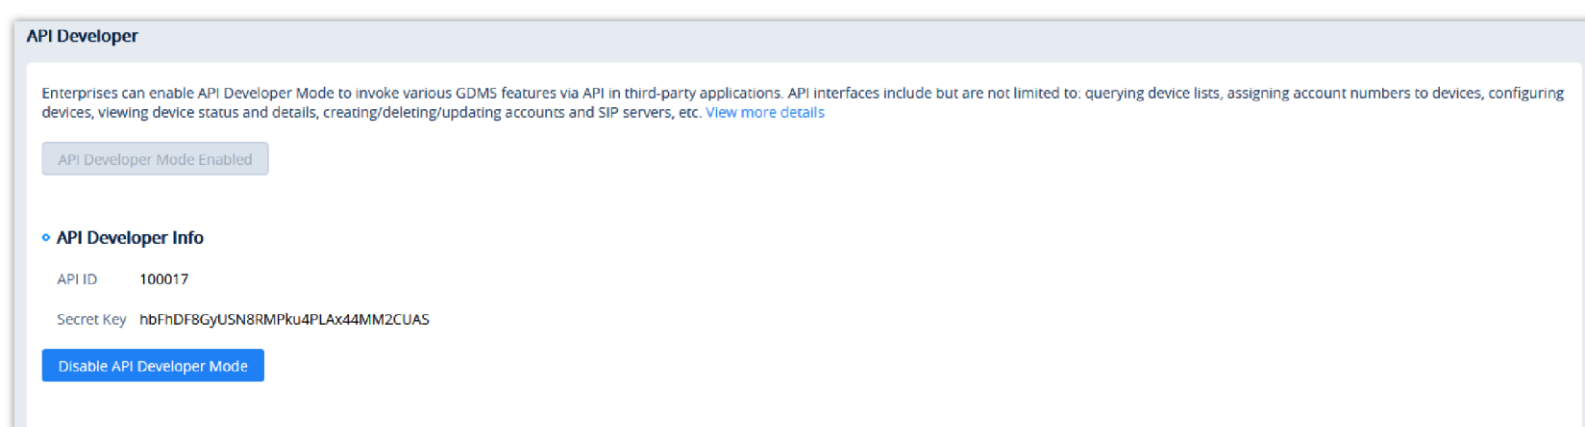

Apply for API Developer

- If the user wants to disable the API Developer feature, the user can click on “Disable API Developer” to stop invoking the API interfaces.

Notes:

- Call API Address:

The API Address is `https://{gdms_domain}/oapi/xxx`

- If your GDMS account is in the US region, the {gdms_domain} can be filled with `www.gdms.cloud`
- If your GDMS account is in the EU region, the {gdms_domain} can be filled with `eu.gdms.cloud`


- When the API Developer is disabled, the previous API secret key will be invalid, the user cannot invoke the GDMS interfaces. If the user tries to re-apply for the API Developer feature, the system will assign another secret key to the GDMS account.

About GDMS

Users can view GDMS “System Version”, “Server information”, and “Supported Models and Firmware” by clicking on **System** → **About GDMS**.

- “System Version” includes:
 - GDMS Version: The current version of the GDMS platform and the “Release Notes” link.
 - App Version: iOS and Android application version and QR codes to scan to download the app.
- “Server Information” includes links to:
 - [GDMS & UCMRC Server Information](#)
 - [GDMS Security Whitepaper](#)
 - [Privacy Statement](#)

- “Supported Models and Firmware” includes the supported products and the minimum/recommended firmware version.

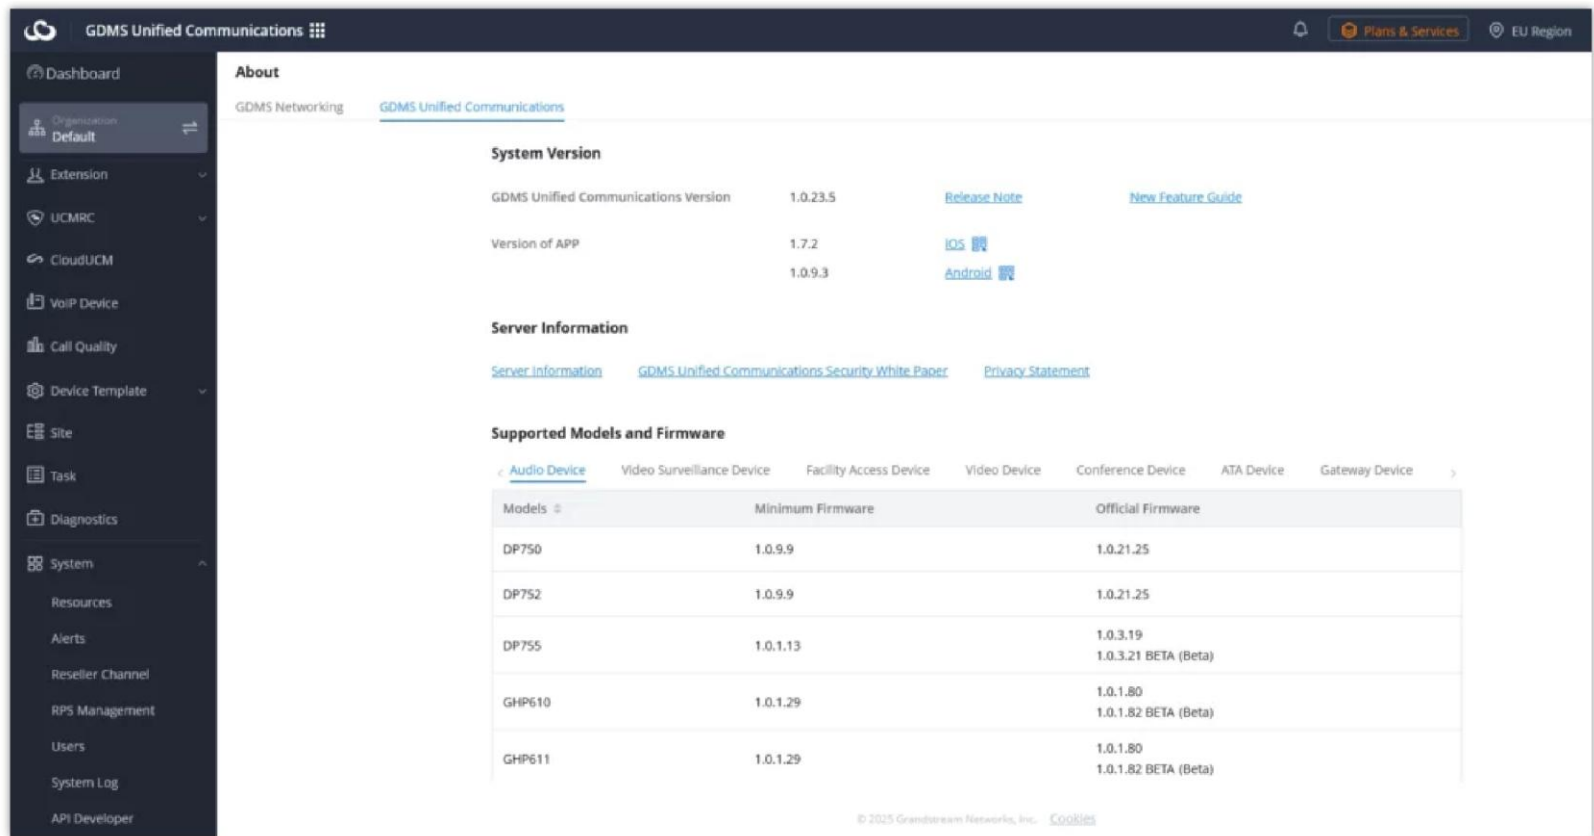

About GDMS

The GDMS platform supports the following languages:

- English, Chinese, Spanish (Spain), Spanish (Latin America), German, French, Portuguese, Vietnamese, and Arabic.

CHANGELOG

Version 1.0.25.78

- Login page has been redesigned [[Login](#)]
- GDMS-ITSP Function: Added pushing default config to VoIP devices via Reseller Channel. [[Default Config File](#)]

Version 1.0.25.59

- Setting up more than one multi-factor authentication method is now supported. [[Multi-Factor Authentication](#)]
- Added “Last Online Time” to the device lists for VoIP, UCMRC, and CloudUCM. [[On-Premise PBX](#)]
- Added “Allow Trusting This Browser” configuration to Account Security Settings. [[Account Security Settings](#)]

Version 1.0.25.29

- Added Multi-factor Authentication enforcement for all GDM users. [[Multi-Factor Authentication](#)][[Account Security Settings](#)][[User Settings](#)][[Reset Multi-Factor Authentication for Sub-users](#)]

Version 1.0.25.14

- Added support for GDS372X models. [[Supported Devices and Requirements](#)]
- Added ability to change the SIP server quickly from a drop down menu. [[Configure SIP Account \(Non-DP Devices\)](#)]

Version 1.0.23.5

- Added support for UCM63xx Configuration Template. [[Set Parameters for SoftwareUCM/UCM63xx Series Devices](#)]
- Added support for Email Multi-factor Authentication. [[Enable Email MFA](#)]
- Added “Auto-lock for Silent Users” feature. [[Login Auto-Lock for Inactive Users](#)]
- Added real-time verification for account registration. [[GDMS Account Registration](#)]
- Added logging of login failure events to system operation logs. [[System Log](#)]
- Added new configuration option “Access Rules” for account security settings. [[Access Rules](#)]

Version 1.0.21.8

- Changed the GDMS account registration process to include country and region [[GDMS Account Registration](#)]
- Added support for SoftwareUCM on On-Premise PBX. [[On-Premise PBX](#)]
- Added “Synchronize extension to GDMS” option. [[Synchronize extensions to GDMS](#)]
- Added support for disabling the created users. [[Edit Subuser](#)]

Version 1.0.19.4

- Added support for SAML SSO. [[SAML SSO](#)]
- Added support for CloudUCM configuration template. [[Create a Template for CloudUCM Devices](#)][[By Model](#)][[By Group](#)]
- Added support for automatic file cleaning of the cloud storage. [[Automatic File Cleanup](#)]
- Added support for the dark theme. [[User Settings](#)]
- Log-in attempts are now limited to 5 attempts before imposing a 30-minute cooldown. [[GDMS Account Logging](#)]
- Added support for opening subscriptions to the DP base station directly from the GDMS web interface. [[Open Subscription for DP Base Stations](#)]
- GDMS API has been updated. [[API Developer](#)]

Version 1.0.17.12

- Modified the GDMS Logo and updated the login page.
- GDMS Networking system has been added
- Merged VoIP, UCMRC, and CloudUCM systems to “GDMS Unified Communications”. The left navigation menu was updated. GWN.Cloud was renamed to “GDMS Networking”. [[GDMS Overview](#)]
- Updated the Dashboard page and Overview page. [[Dashboard](#)]
- Merged GXW4500 series and GXW42xx series into the VoIP Device module. [[VoIP Devices](#)]
- Supported entering any email address and setting the notification email for expired plans in the Alert module. [[Email Notifications Alert](#)]

Version 1.0.16.25

- Added support for GCC all-in-one products in the GDMS and supported cross-system management for GCC devices. [[Supported Devices and Requirements](#)]
- The “IPPBX device” module in the UCMRC System has been renamed to “PBX Device”.
- Supported to view and subscribe to the latest firmware of the CloudUCM, and users can view the release notes of the CloudUCM. [[Firmware Update Notification Settings](#)]
- Supported to set a specific organization to the default organization. [[Default Organization](#)]

Version 1.0.16.9

- Added CloudUCM System. [[CloudUCM System](#)]

Version 1.0.15.15

- No major changes.

Version 1.0.14.14

- GDMS and GWN.Cloud can now be merged into one account to manage all Grandstream devices using one account. [[Main Functions Overview](#)]
- The user can now quickly switch between VoIP System, UCMRC System, and GWN.Cloud System. [[Main Functions Overview](#)]
- Added “Account Security” module which includes password security settings, login timeout, and multi-factor authentication for all users. [[Account Security Settings](#)]
- Improved requirements for password rules. [[GDMS Account Registration](#)]
- Added “Return Device” and “Reclaim Device” features on the Reseller Channel page. [[Return Device](#)] [[Reclaim Device](#)]

- Moved the “Reseller Channel → Subchannel” module to “Users → Associated Company” for management. [[Associated Company Management](#)]
- Added the “Region Settings” module to open or close certain regions. [[REGION MANAGEMENT](#)]
- Optimized the login page, User management page, Personal Settings page, Reseller Channel, etc.

Version 1.0.13.21

- Added DP755 model on the support list of the GDMS platform. [[About GDMS](#)]
- Added “Account Active” option on the “Add Account” page and “Edit Account” page under the “SIP Account” module. [[Add SIP Account](#)] [[Edit Account](#)]

Version 1.0.13.15

- Add FIDO U2F multi-factor authentication method. (GDMS platform mobile apps do not support this feature) [[Enable FIDO Security Key](#)]
- Added ability for the administrator to forcibly enable multi-factor authentication for sub-users, and remove multi-factor authentication for sub-users in batches. [[Enable Multifactor Authentication For a User](#)]
- Integrated GUI Config Tools. Users can quickly create GUI Config files on the Resource Management page and parameters configuration page. [[GUI Config File](#)]
- Added new features for VoIP devices on the parameters configuration page: Print MPK Sticker, select firmware path or upload firmware from the firmware list, and move up and down the tables. [[Device Parameters Configuration](#)]
- Supported copying model templates and group templates to another organization. [[Copy Model Template](#)]
- Supported creating permanent firmware upgrade task and it can take effect on newly added devices [[Add Task](#)]
- Added ability to edit the custom firmware files. [[Edit Custom Firmware File Info](#)]
- Added the SSH remote diagnosis switch in the Diagnostics module for devices (Currently only supported by GRP260x). [[SSH Remote Capture](#)]
- Added the following updates to the IPPBX device details statistics report: Device status statistics chart and remote user registration statistics chart. The alert list is also added to the PDF report file. [[IPPBX Device Statistics](#)]
- Added the device model info to the alert emails and alert details. [[View Alert Notification](#)]
- Added the alert for restoring the online status of the VoIP devices.
- Added ability to set chat file size limit after enabling Cloud IM service. [[IM File Limit](#)]
- Added the following APIs: View the template list and push the configuration template with a specific ID to some devices. [[API Developer](#)]

Version 1.0.12.18

- Added “RPS Management” module. Users can manage multiple RPS (Redirection & Provision Server) in a unified manner and configure RPS for device organizations. [[RPS Management](#)]
- Added ability to quickly configure RPS for the current organization on the “VoIP Device” menu. [[Assign RPS](#)]
- Added SSH access authorization to the IPPBX device or VoIP device for remote support to troubleshoot problems. [[Manage Device via GDMS Support](#)]
- Added ability to select whether to enable/disable GDMS cloud storage space when adding an IPPBX device or importing an IPPBX device to the GDMS platform. This feature is only for the UCMRC paid plan users. [[IPPBX Device Management](#)]
- Added ability to batch download files on the IPPBX cloud storage space interface. [[Storage](#)]
- Added ability to select to upgrade firmware for “All devices in this model” when creating the upgrade tasks on the “Task” module. [[Add Task](#)]
- Added the ability to edit the “Alert” settings for multiple organizations in batches. [[Alert Notification Settings](#)]
- Added ability to directly upgrade firmware for the devices in the “Reseller Channel” module. [[Upgrade Task](#)]
- Added “GDMS Security Whitepaper” document and “Privacy Statement” in the “About” module. [[About GDMS](#)]

Version 1.0.12.6

- Added “By Site” option under the “Device Template” module. It allows users to configure the template for a specific site and provision the devices on that site. [[By Site](#)]
- Added the “Energy Saving Inform” tab under the VoIP Device Details module. Users can configure the energy-saving settings through the device configuration template. [[View Device Details](#)]

Version 1.0.11.19

- Added an add-on plan for UCM RemoteConnect service: Extra 100 Concurrent Calls. If the user purchases this add-on plan, the corresponding UCM63XX device can add the capacity of 100 concurrent calls. [[Plan & Service](#)]
- Added an option to export order receipts. Users can export the order receipts after placing the orders. [[Export Receipt](#)]
- Added an option to ask the user whether to synchronize the local configurations of the device when adding/importing VoIP devices to the GDMS platform. [[Add VoIP Device](#)]
- Added an option to ask the user whether to import the local SIP account configuration of the device when synchronizing the VoIP device’s local configuration to the GDMS platform. [[Batch Import SIP Account](#)]
- Added a new alert type for the UCM63XX device “Outbound trunk call duration usage”, and combined “Network Disk Status” and “External Disk Status” alert types to “External Disk Usage”. [[Alert Notification Settings](#)]
- Added the time range settings for “Message notification settings”, “App notification settings”, and “Email notification settings”. If the user sets the time range for alerts, the user can only receive the alert notifications during that specific period. The user can select the whole day, a specific time period, or multiple different time periods during a day. [[Alert Notification Settings](#)]
- Supported editing resource files. The user can upload the resource file again, and leave the URL unchanged. [[Other Resources Management](#)]
- Added an entrance to view UCM RemoteConnect plan specifications on the GDMS main page. [[Plan & Services](#)]
- Added “Outbound Proxy” field for SIP accounts importing the template. [[Batch Import SIP Accounts](#)]
- Supported adding OEM devices to the GDMS platform account for management. [[IPPBX Device Management](#)]
- Improved the user experience on the GDMS platform.

Version 1.0.10.41

- No major changes

Version 1.0.10.23

- Added to share organizations between enterprises. Organizations can be managed by the other associated enterprises. [[Share Organization](#)]
- Added IPPBX-related alert types and App notification setting module. [[Alert Notification Settings](#)]
- Added an option to apply the changes to all devices when editing the “By Model” template. Added an option to remember the current setting for the option “Auto Provision to Devices in”, and the option will be set following the setting for the previous model template when the user creates a new one. [[Add Template](#)]
- Optimized the “IPPBX Devices” interface and added the feature to apply for the free trial plan. [[Add SIP Server](#)]
- Optimized the “My Plans” interface and added the feature to apply for the Cloud IM service. [[Enable Service](#)]
- Optimized interface according to the specifications of the UCM RemoteConnect plans.

Version 1.0.9.13

- Unified the account login center. Users do not need to select the US regional server or EU server for login. [[GDMS Account Registration](#)]
- VoIP System is classified by supporting VoIP device and GXW45XX Device. [[Supported Device Model](#)]
- Added search function in Set Parameters module. [[Set Parameters](#)]
- Improved the function performances in the Diagnostics module. [[Device Diagnostics](#)]

Version 1.0.8.16

- Assigned permissions to separate the different sub-systems in the GDMS platform.

- Added UCMRC system module and the navigation structure has been updated. Added Dashboard module and Overview module and added displaying more IPPBX device status information. [[UCMRC SYSTEM](#)]
- Optimized the IPPBX device list. Added Overview module and Plan Details information module in the Device Details module. [[IPPBX Device Details](#)]
- Added a new default site when adding a new IPPBX device to the GDMS platform. [[Add SIP Server](#)]
- Added supporting remote access to the UCMRC, IPPBX permissions settings, and supporting accessing the IPPBX Web UI without entering a password through the GDMS platform. [[UCMRC SYSTEM](#)]
- Added managing SIP server address for IPPBX devices, and support configuring the advanced settings of SIP servers. [[Add SIP Server](#)]
- Added to support Spanish, Latin Spanish, French, Greek, and Arabic languages in the GDMS platform. [[About GDMS](#)]
- Added to support UCMRC and VoIP sub-systems in the GDMS mobile application.
- Added alert messages pushing function in the GDMS mobile application.

Version 1.0.7.11

- Supported Host/Spare functionality for UCMRC services. Users can view the Host/Spare associations in the GDMS platform and disassociate the relationship. [[View/Disassociate Host/Spare IPPBX Device](#)]
- Supported to allow users to diagnose UCMRC services availability. [[IPPBX Device Diagnosis](#)]
- Supported access to the Web UI of the VoIP devices remotely. [[Remote Access to Device Web UI](#)]
- Added time and date format settings in Personal Settings. [[User Settings](#)]
- Added the ability to convert configuration files. Supported converting the configuration file of UCM62xx to the configuration file of UCM63XX. [[Convert Configuration File](#)]
- Added to display VPN IP address in VoIP Device Details interface. [[View Device Details](#)]

Version 1.0.6.10

- Added UCM CloudIM Service. [[UCM Cloud IM Service](#)]
- Added support to modify the IPPBX region. [[Add SIP Server](#)]

Version 1.0.5.5

- Added support to synchronize IPPBX devices' alert notifications to the GDMS platform. [[Synchronize IPPBX Device Alert to GDMS](#)]
- Added support to restore IPPBX backup files remotely through the GDMS platform. [[Restore IPPBX Backup File Remotely](#)]
- Added to support to diagnosis of IPPBX devices through the GDMS platform. [[IPPBX Device Diagnosis](#)]
- Added to authorize Grandstream Support to manage devices. [[Manage Device via GDMS Support](#)]

Version 1.0.4.9

- Added Call Statistics module for VoIP devices. The SIP accounts in the devices that are using the UCM RemoteConnect service plan will report the call quality and statistical report. [[Call Statistics](#)]
- Added support to upload IPPBX device backup files to the GDMS platform. [[Upload Backup File](#)]
- Added SMS Notification function in the GDMS platform. [[SMS Notification Settings](#)]
- Added to allow users to add IPPBX devices to the GDMS platform with the original password. [[Add SIP Server](#)]
- Added to support to configure multiple SIP servers for a single SIP account. [[Add SIP Account](#)]
- Added to allow users to set sending time for IPPBX daily statistical report. [[View Statistics](#)]

Version 1.0.3.4

- Added to support network diagnosis and system diagnosis functions in the device diagnosis module. [[DEVICE DIAGNOSTICS](#)]
- Added to support to configure the concurrent upgrading devices amount for concurrent upgrade tasks. [[Supported Devices and Requirements](#)]
- Added WP810 to supported devices. [[Add Task](#)]

Version 1.0.2.8

- Supported adding UCM63XX to the GDMS platform. Added PBX Device module: Remote access to UCM63XX, restart UCM63XX, upgrade UCM63XX, view UCM63XX device details, data statistics report, synchronize SIP accounts in the UCM63XX to GDMS platform, etc. [[IPPBX Device Management](#)]
- Added Value-added services module in the GDMS platform. Supported to purchase/renew/upgrade a UCM RemoteConnect Plan and IPPBX/User Cloud Storage Space Plan and view the order history.
- Supported to view statistics report of UCM63XX device. The system can send the daily report to the configured mailbox. [[IPPBX Device Diagnosis](#)]
- Supported viewing the enterprise/IPPBX cloud storage space usage. Users can receive alert messages through a configured mailbox. [[View Storage Space](#)]
- Supported to notify users when the plan will expire soon or has already expired. The alert notification can be sent to the user through a configured mailbox. [[View My Plans](#)]
- Supported creating tasks to reboot/upgrade PBX devices. [[TASK MANAGEMENT](#)]

Version 1.0.1.16

- Added device local configuration synchronization function. Users can synchronize the SIP accounts and parameters to the GDMS platform. [[Synchronize Device Local Configuration](#)]
- Added "Disable Push Configuration" function. Users can disable pushing the configuration to the device through the GDMS platform. [[Disable Push Configuration](#)]
- Added file type "Others" in the Resources Management module. There is no file type limit if the user selects the file type as "Others". [[Other Resources Management](#)]
- Added to allow users to manage devices with the GDMS mobile application. Users can use the application to scan the bar code of the device to add the device to the GDMS platform, configure SIP accounts, view alert messages, etc.
- Added GDMS account deletion function. [[Delete GDMS Account](#)]

Version 1.0.1.3

- Added Resource Management module in GDMS platform. [[RESOURCE MANAGEMENT](#)]
- Added Custom Ringtone configuration and involved settings. [[VoIP Device Management](#)]
- Added the function to support copy configuration. [[Device Parameters Configuration](#)]

Version 1.0.0.65

- New independent region: EU region (for GDPR rules)
- Support GRP26XX, DP7XX, GXP21XX, GXV3380/3370/3350, HT80X, HT81X, GVC3210, GRP2616.
- Add Sub-level organization feature.
- The user's dashboard supports statistics by sites. [[Device Statistics](#)]
- The user's dashboard adds a device distribution Map. [[Device Statistics](#)]
- Added operation logs for different users and record the operation logs for each device. [[SYSTEM LOG](#)]
- Support repeating tasks. [[Add Task](#)]
- The ACS server supports load balance.
- Supported Multi-Factor Authentication function in GDMS platform to provide higher security protection for GDMS account. [[MULTI-FACTOR AUTHENTICATION](#)]
- Supported to copy and paste the data from other organizations when users try to create a new organization. [[Add Organization](#)]
- Supported to transfer of the devices to other organizations. [[Move Device](#)]
- Supported to divide group templates into multiple series templates, which makes it easier for users to configure devices in different groups. [[By Group](#)]
- Supported to delete organizations. [[Delete Organization](#)]
- Supported to filter the devices in the specific city on Device Geo Map. [[Device List](#)]
- API Interfaces. [[API DEVELOPER](#)]

Version 1.0.0.42

- This is the initial version.

