

Grandstream Networks, Inc.

**GWN781x, GWN782x and GWN783x Managed
Switches - User Manual**



GWN781x, GWN782x and GWN783x Managed Switches - User Manual

INTRODUCTION

The Grandstream GWN781x, GWN782x, and GWN783x series include managed network switches designed for scalable, secure, and high-performance business networks. The series covered by this manual provide the following capabilities:

- **GWN781x Series:** Layer 3 managed switches, providing enhanced routing capabilities for medium-to-large enterprises.
- **GWN782x Series:** Layer 3 multi-gigabit switches, suited for medium-to-large businesses requiring high data throughput and advanced network management.
- **GWN783x Series:** Aggregation switches, designed for enterprises needing high-capacity, scalable infrastructure for large network environments.

All models covered by this manual support advanced VLAN for flexible traffic segmentation, QoS for network traffic prioritization, IGMP/MLD Snooping for performance optimization, and comprehensive security capabilities. PoE models are available to power IP phones, IP cameras, Wi-Fi access points, and other PoE endpoints.

These switch series can be managed through multiple methods, including a local web user interface, command-line interface (CLI), and integration with Grandstream's GDMS Networking and GWN Manager platforms, providing complete end-to-end network management options.

Whether deployed in small-to-medium businesses, larger enterprises, or as part of aggregation networks, the GWN781x, GWN782x, and GWN783x series deliver enterprise-grade performance and reliability for diverse network needs.

PRODUCT OVERVIEW

Technical Specifications

Select a switch series below to open its Technical Specifications guide. These guides provide model-specific interfaces, performance, PoE, power, environmental, physical, and compliance information.

Series	Models	Technical Specifications
GWN781x	GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)	GWN781x Series Technical Specifications
GWN782x	GWN7821P, GWN7822P	GWN782x Series Technical Specifications
GWN783x	GWN7830, GWN7831, GWN7832	GWN783x Series Technical Specifications

GWN781x, GWN782x, and GWN783x Technical Specifications Guides

INSTALLATION

Select the applicable switch model below to open its Quick Installation Guide. Each guide provides package contents, port and LED information, power and network connections, and mounting instructions.

Series	Models	Quick Installation Guide
--------	--------	--------------------------

GWN781x	GWN7811(P), GWN7812P, GWN7813(P)	GWN781x(P) Quick Installation Guide
	GWN7816(P)	GWN7816(P) Quick Installation Guide
GWN782x	GWN7821P, GWN7822P	GWN782xP Quick Installation Guide
GWN783x	GWN7830	GWN7830 Quick Installation Guide
	GWN7831	GWN7831 Quick Installation Guide
	GWN7832	GWN7832 Quick Installation Guide

GWN781x, GWN782x, and GWN783x Quick Installation Guides

GETTING STARTED

LED Indicators

The front panels of the GWN781x, GWN782x, and GWN783x switches have LED indicators for power and interface activities, the table below describes the LED indicators' status.

LED Indicator	Status	Description
System Indicator	Off	Power off
	Solid green	Booting
	Flashing green	Upgrade
	Solid blue	Normal use
	Flashing blue	Provisioning
	Solid red	Upgrade failed
	Flashing red	Factory reset
Port Indicator	Off	For all ports: port off For SFP/SFP+ ports: port failure
	Solid green	Port connected and there is no activity
	Flashing green	Port connected and data is transferring
	Solid yellow	Ethernet port connected, and there is no activity and PoE powered
	Flashing yellow	Ethernet port connected, data is transferring and PoE powered
	Alternately flashing yellow and green	Ethernet port failure
PWR/RPS Indicator	Off	Uninserted or failure
	Solid Green	In useInserted but not used (only for RPS)

LED Indicators

During the boot sequence, the LED indicator transitions through multiple color states

Access & Configure

If no DHCP server is available, the switch's default IP address is 192.168.0.254.

Login Using the Console Port

1. Use the console cable to connect the console port of switch and the serial port of PC.
2. Open the terminal emulation program of PC (e.g. SecureCRT), enter the default username and password to login. (The default administrator username is "admin" and the default random password can be found at the sticker on the switch).

The baud rate needs to be set to 115200.

Login Remotely Using SSH

1. Enter "**cmd**" in PC/Start.
2. Enter **ssh <switch_IP>** in the cmd window.
3. Enter the default username and password to login. (The default administrator username is "admin" and the default random password can be found at the sticker on the switch).

Supports SSH and TELNET in #Mode (EXEC mode).


GWN Switches support also Web CLI.

Configure Using GDMS Networking

Type <https://www.gdms.cloud> in the browser, and enter the account and password to login the cloud platform. If you don't have an account, please register first or ask the administrator to assign one for you.

Login Using the Web UI

The switch's embedded web server responds to HTTPS GET/POST requests. Embedded HTML pages allow users to configure the device through a Web browser such as Microsoft Edge, Mozilla Firefox, or Google Chrome.

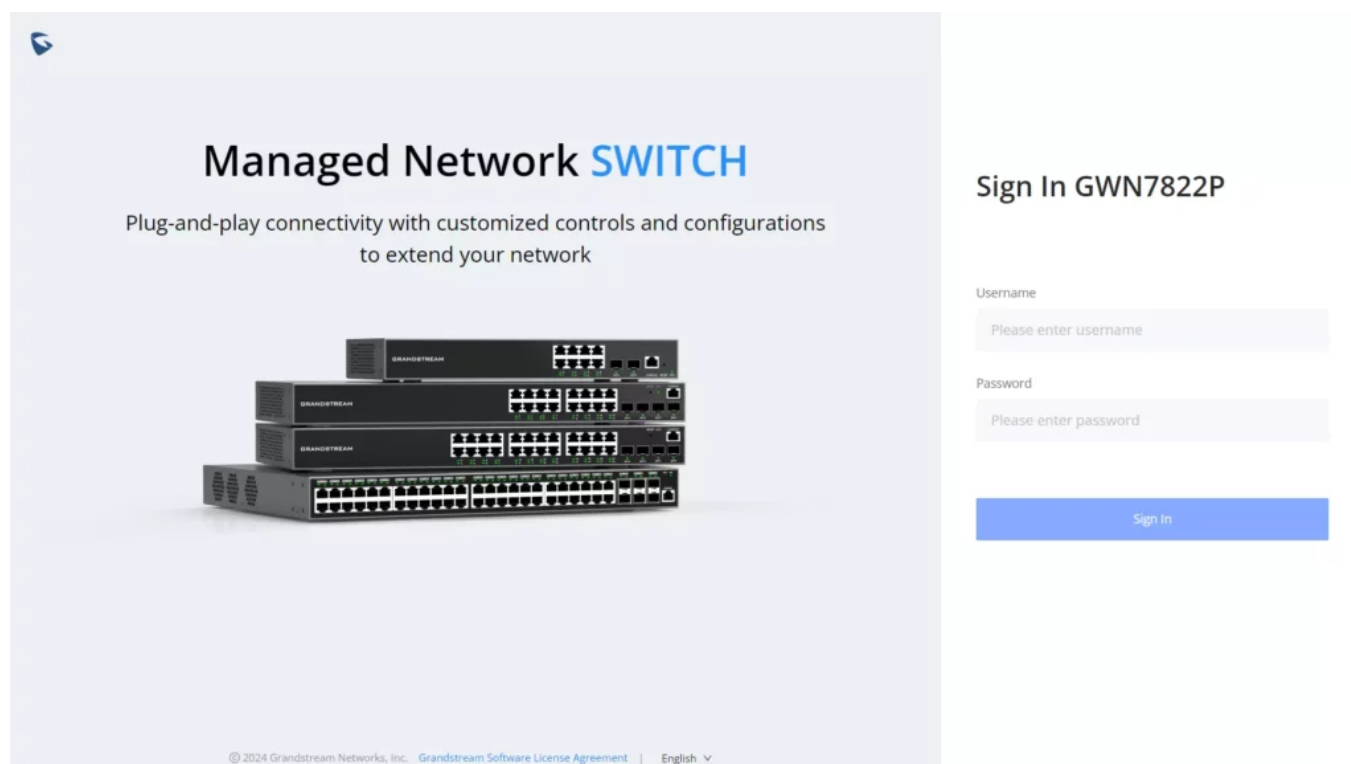

Login Using the Web UI

1. A PC uses a network cable to correctly connect any RJ45 port of the switch.
2. Set the Ethernet (or local connection) IP address of the PC to 192.168.0.x ("x" is any value between

1-253), and the subnet mask to 255.255.255.0, so that it is in the same network segment with switch IP address. If DHCP is used, this step could be skipped.

- 3. Type the switch's default management IP address **https://<switch_IP>** in the browser, and enter the username and password to log in. (The default administrator username is "admin" and the default random password can be found at the sticker on the switch).


CLI Access

In addition to the web-based configuration, the switch can also be configured using a Command Line Interface (CLI). For detailed instructions on using the CLI, please refer to the **GWN78xx CLI User Guide**.


Web GUI Languages

The switch's web UI supports many languages including **English, Simplified Chinese, Spanish, French** etc.

To change the default language, select the displayed language at the bottom of the web GUI either before or after logging in.

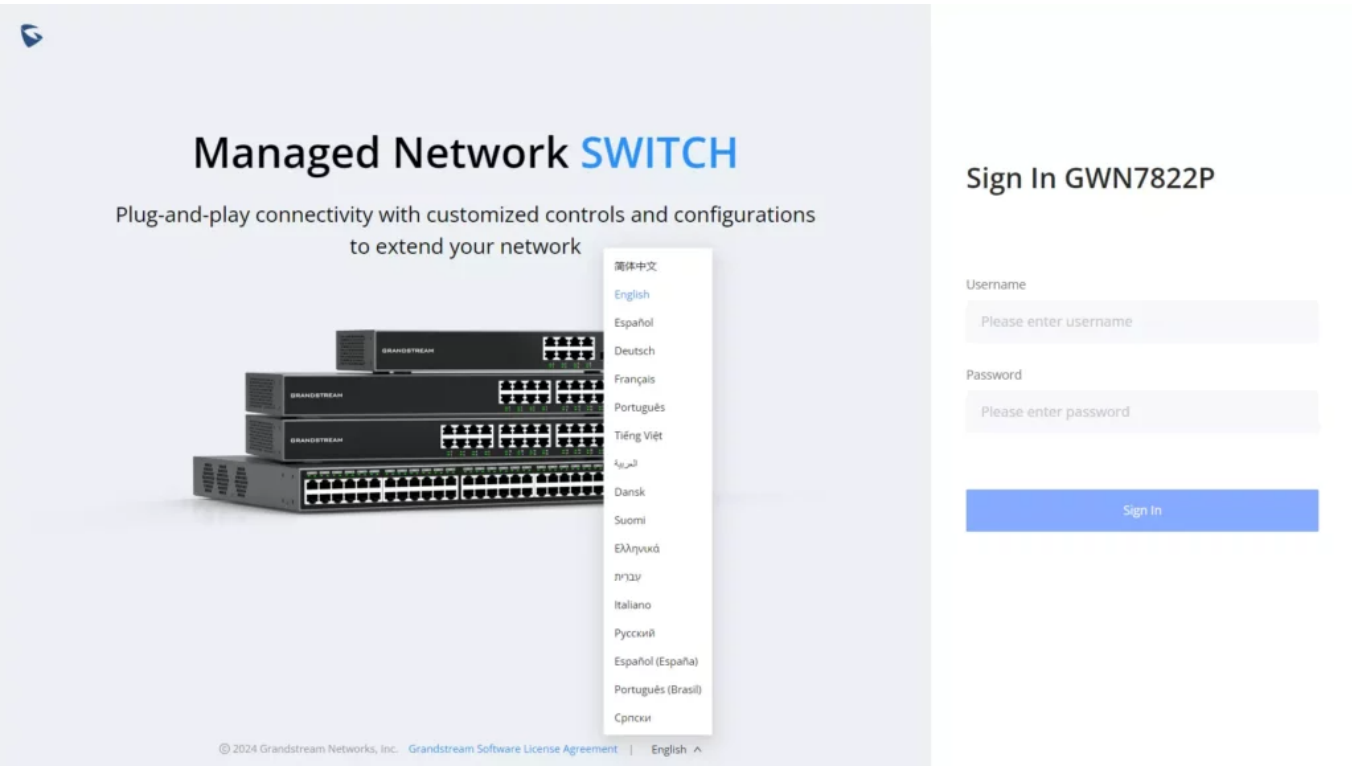

Web GUI Languages Login Page

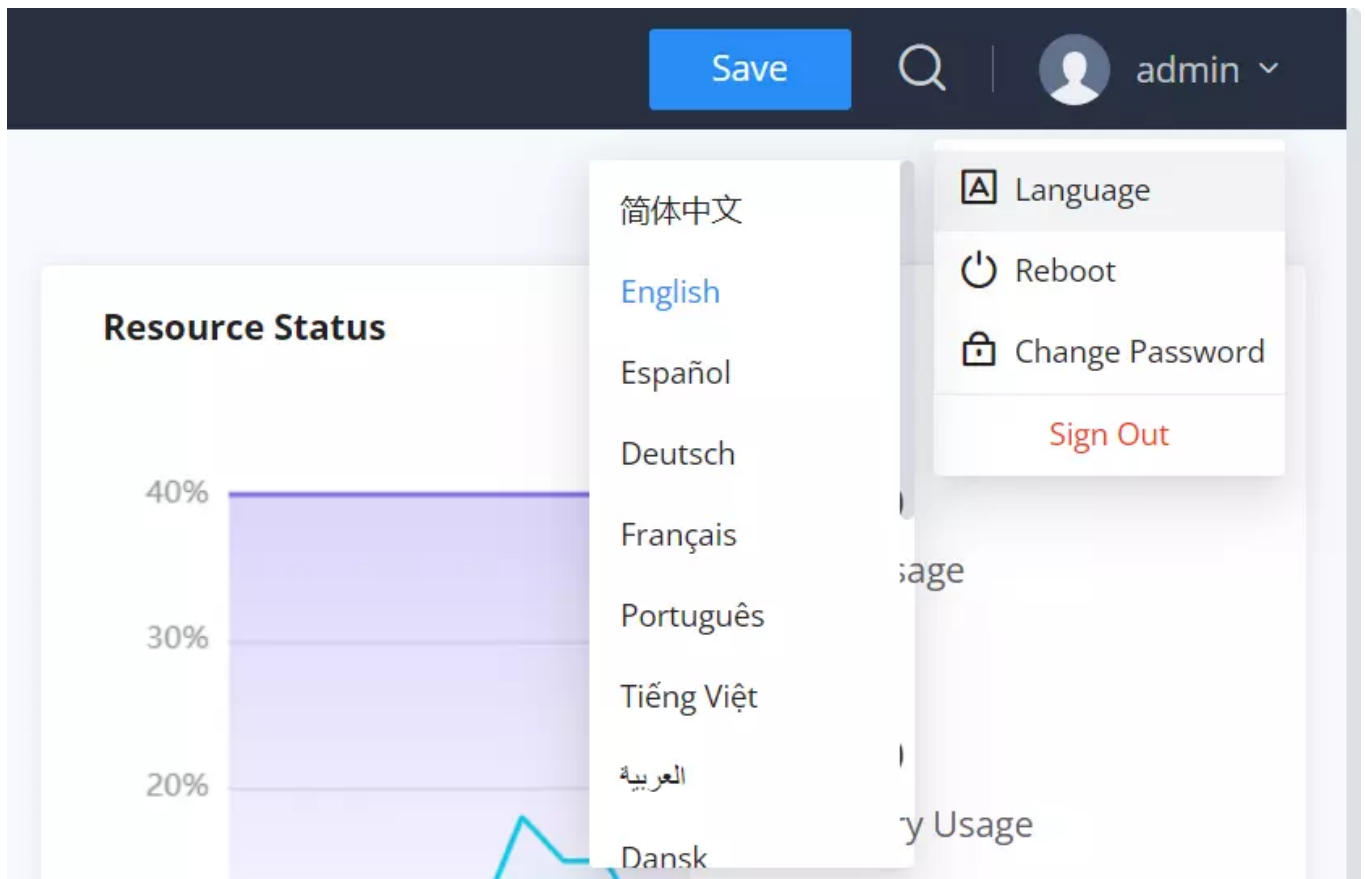


WEB GUI Start page

When the Web GUI language is manually changed from the login page or within the interface, the selected language will be saved in the device's configuration. This preference will persist across sessions, reboots, and browsers, regardless of the system's regional or browser settings.


Search

Use the search function in the switch's web UI to quickly find configuration pages, settings, and parameters. On the top of the page, there is a search icon, the user can click on it and then enter the keyword relevant to his search, then he will get all the possible locations of that keyword.

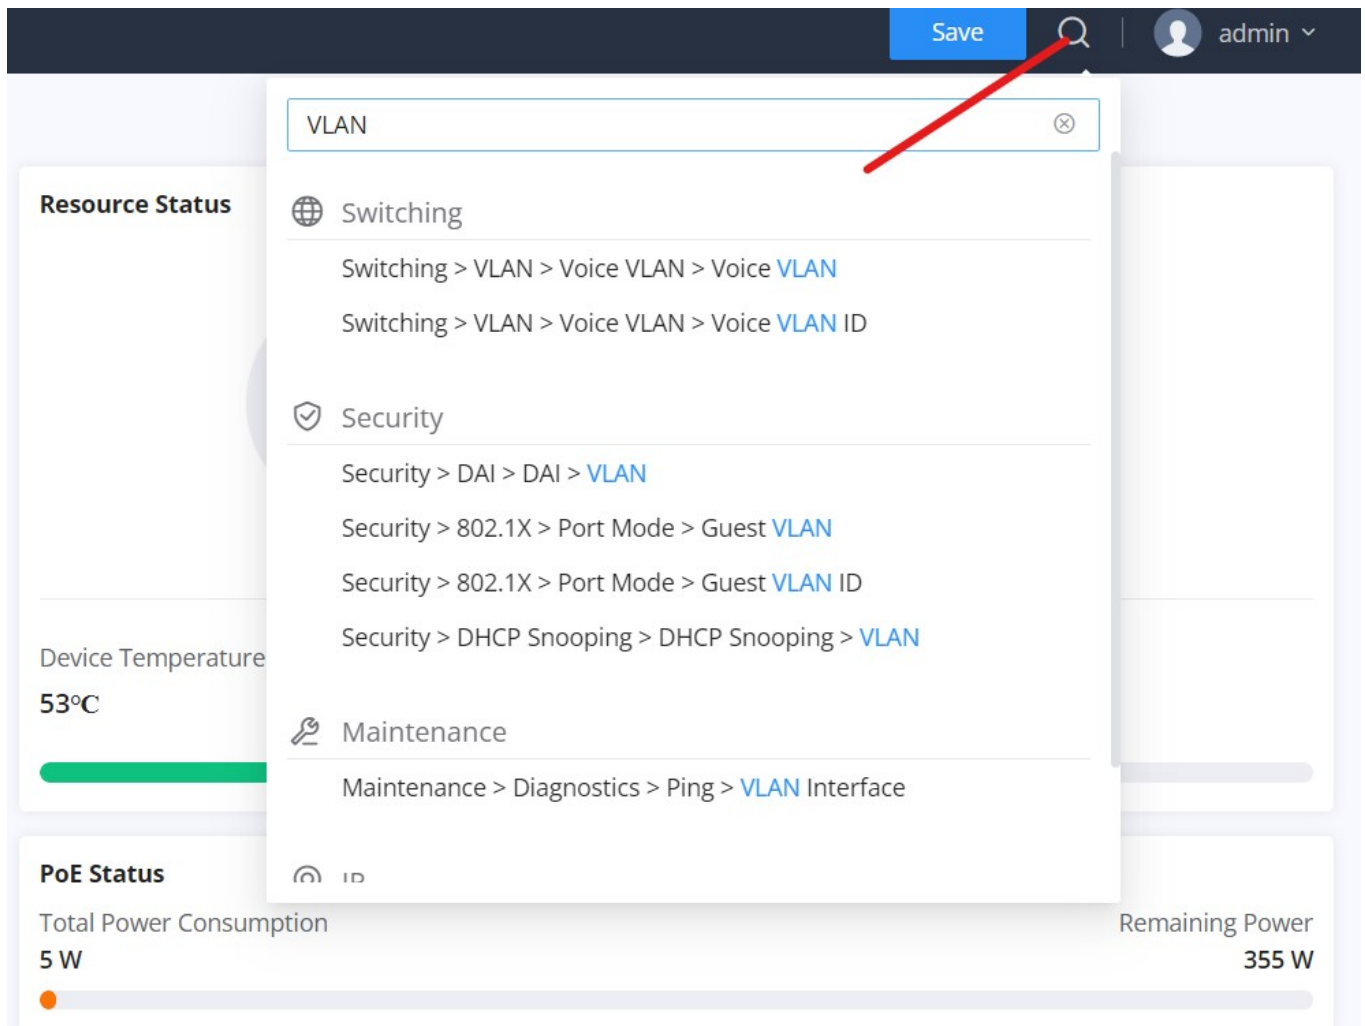

Search part 1

It's also possible to search through menus and sub-menus, and once the user clicks on the search result, they will jump directly to the specified page, please see the figure below:

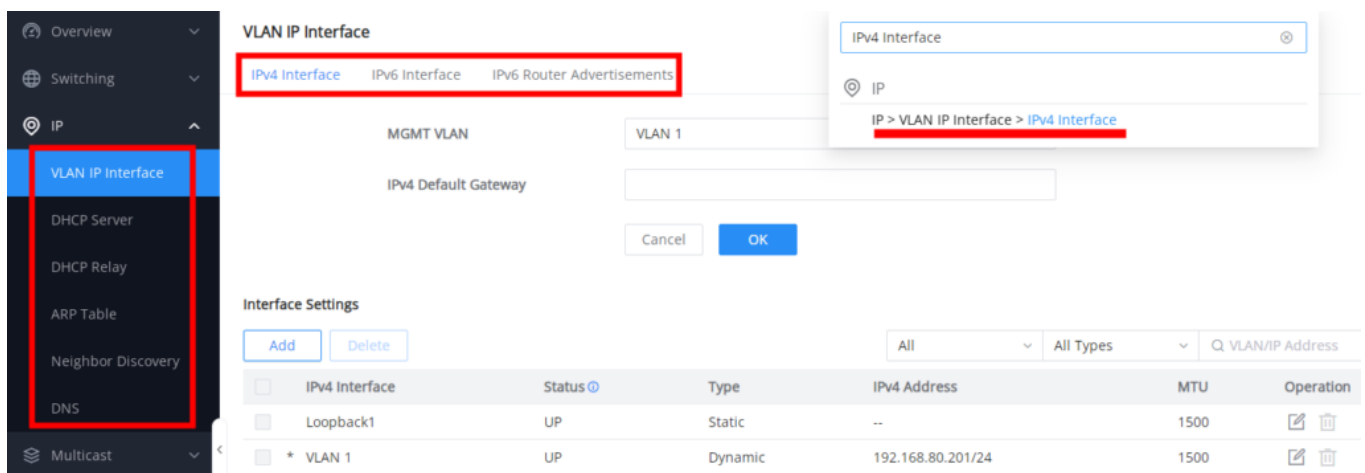


Search part 2

OVERVIEW

Overview is the first section that displays System information in the first page "**System Info**" and Port status on the second page "**Port Info**". This section provides an overall view of the switch's system and port status for easy monitoring.

System Info

System Info is the first page after a successful login to the switch's web interface. It provides a dashboard view of general switch information, resource status, PoE status, and system events.

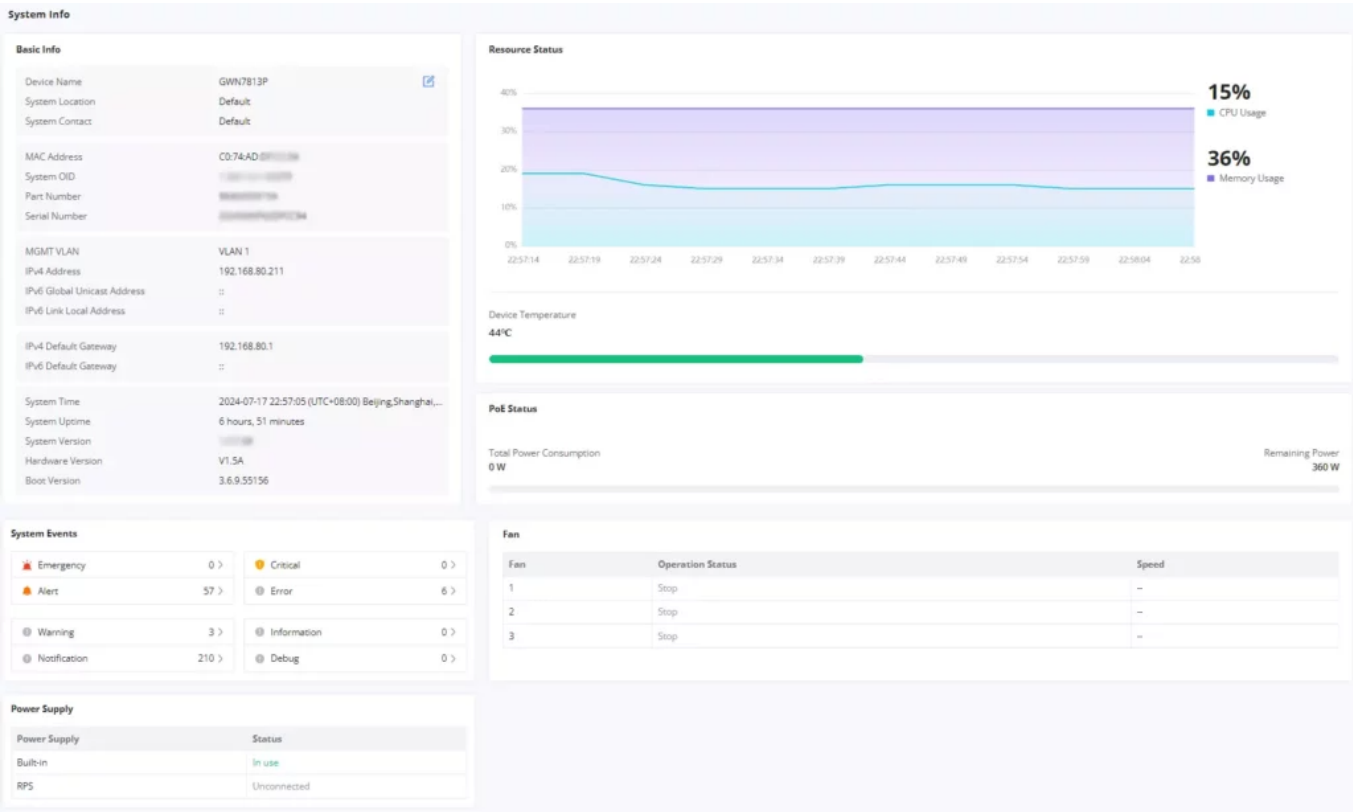

System Info page

To name the device please click on , then enter the desired name.

Basic Info	Displays Device and System general information that includes (Device name, MAC Address, Default Gateway, System Time, System Version etc.)
Resource Status	Displays in real time the usage of CPU and Memory.
PoE Status	Shows the Total Power Consumption and the remaining Power in mA.
System Events	Diplays the total number of events for each category (Emergency, Alert, Warning etc). Note: Clicking on any events category will redirect you to the Diagnostics page for further details.
Fan	Displays the fans operation status and speed.
Power Supply	Shows the status of the built-in power supply as well as the RPS (Redundant Power Supply).

System Info page

Port Info

This page on the GWN switches provides comprehensive port statistics, PoE power supply information, and detailed port and neighbor information. It helps users monitor network performance and manage connected devices efficiently.

- Port Info

The "Port Info" section visually displays the status and speed of each port, using different colors for speeds and states. Users can quickly identify active, inactive, or problematic ports and their PoE power status.

Port Info



Port Info page 1

- Basic Info and Neighbor Info

The "Basic Info" section shows specific details for a selected port, including its status and settings. The "Neighbor Info" section provides information about the device connected to the port, such as hostname and current traffic rates.

Click on the port above to view port information

Basic Info	Neighbor Info
Port Name: 1/0/24 Port Description: -- Port Status: Up Speed: Auto (1000Mbps) Duplex Mode: Auto (Full) Flow Control: Disabled (Off) Jumbo Frame: 9216	Hostname: GWN7813P Device ID: C0:74:AD:BA:24:FC IPv4 Address: 192.168.80.37 IPv6 Address: -- Manufacturer: Grandstream Networks, Inc. Current Rate: 41.17Kbps 0bps Current Pkts/Bytes: 205168407 / 124.82MB 199820233 / 3.47GB Up Time: 5 hours, 24 minutes

Port Info page 2


- Statistics

The "Statistics" section offers detailed metrics on network traffic through the switch. It includes data on octets, packets, and discards, which is crucial for monitoring performance and troubleshooting.

- PoE Power Supply / Fiber Info

If the selected port is PoE-capable, the "PoE Power Supply" section shows power supply status and usage. If the port is SFP, the "Fiber Info" section displays details like signal loss, temperature, RX, and TX power.


Statistics	
InOctets:	130986829
InUcastPkts:	65659
InNUcastPkts:	205103115
InDiscards:	0
OutOctets:	3727239001
OutUcastPkts:	47410
OutNUcastPkts:	199773098
OutDiscards:	0
InMulticastPkts:	100627720
InBroadcastPkts:	104475395
OutMulticastPkts:	84691835
OutBroadcastPkts:	115081263

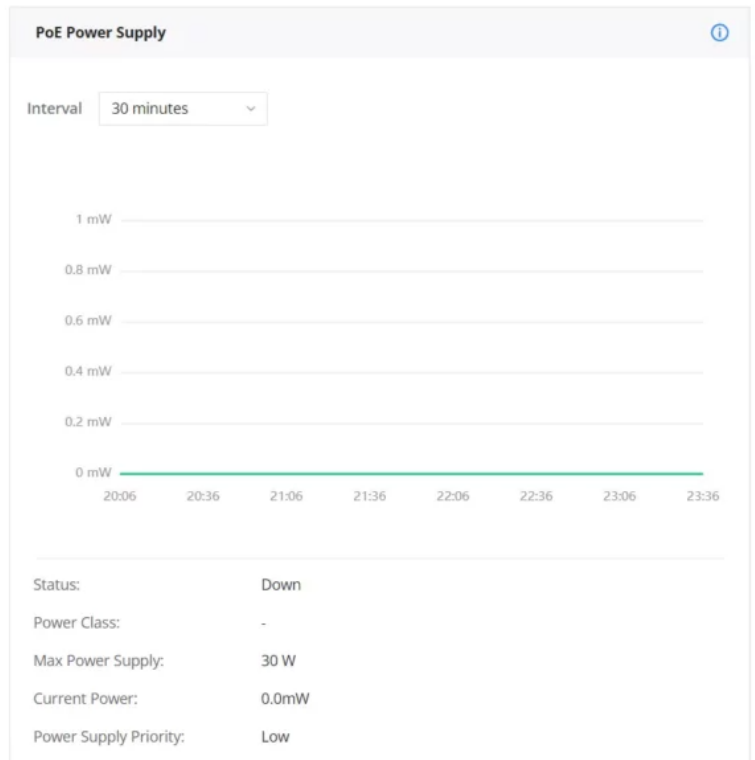

Port Info page 3

The following table explains the color mode and the symbols used:

	Grey: Linkdown
	White: shutdown
	Green: Ethernet RJ45 port with 1000 Mbps speed
	Light green: Ethernet RJ45 port with 100 Mbps/10 Mbps speed
	Red: ErrDisable
	Green: SFP/SFP+ Port set to 1000Mbps

	Purple: SFP Port set to 2.5Gbps
	Blue: SFP+ port set to 10Gbps
	Symbol: PoE Power is enabled.

Port Info

Note: a PoE symbol and color code combination is also possible. Ex: in this case, the port is using 1000 Mbps speed and also using PoE at the same time.

Icons Description:

- **Basic Info:** The edit icon forwards users to the Port Basic Settings page, where they can modify the port settings such as Description, Speed, Duplex Mode, and Flow Control, or enable/disable the port.
- **Neighbor Info:** The details icon forwards users to the LLDP/LLDP-MED Neighbor Info page. Here, users can view additional information about the connected devices, including chassis ID, port ID, device name, system description, and survival time.
- **PoE Power Supply / Fiber Info:** The details icon forwards users to the respective detailed pages. For PoE, it forwards to the PoE Interface page showing detailed information about PoE settings for each port. For Fiber, it forwards to the Fiber Module page, displaying comprehensive fiber details such as signal loss, temperature, RX, and TX power.
- **Statistics:** The clear icon clears the displayed statistics.

SWITCHING

Switching section is used to configure ports settings, link Aggregation, VLAN, Spanning Tree etc.

Port Basic Settings

On this page, you can configure basic switch-port parameters, including enabling or disabling a port, adding a description, selecting the speed and duplex mode, and configuring flow control. Use the filter to display only copper (Gigabit Ethernet) or fiber (SFP+) ports.

To configure a port, please navigate to **Web UI -> Switching -> Port Basic Settings**.

Port Basic Settings

Edit							All Ports
☒	Port	Port Type	Description	Status	Link Status	Speed	
☒	1/0/1	Copper	GWN76xx	Enabled	Down	Auto	
☒	1/0/2	Copper	Guests	Enabled	Down	Auto	
☒	1/0/3	Copper	--	Enabled	Down	Auto	Auto
☒	1/0/4	Copper	--	Enabled	Down	Auto	Auto
☒	1/0/5	Copper	--	Enabled	Down	Auto	Auto
☒	1/0/6	Copper	--	Enabled	Down	Auto	Auto
☒	1/0/7	Copper	--	Enabled	Down	Auto	Auto
☒	1/0/8	Copper	--	Enabled	Down	Auto	Auto
☒	1/0/9	Copper	--	Enabled	Down	Auto	Auto

Port Basic Settings

To configure a port, click on the "Edit" icon under the operation column.

Port Basic Settings > Edit Port

Port	1/0/28
Port Type	SFP+
Description	0-128 characters
Port Enable	☒ Enable ☐ Disabled
Scheduled enabled	None
Auto Detect	☐
Speed	10Gbps
DAC Cable	Disabled
Duplex Mode	☒ Full
*Jumbo Frame	9216 Valid range is 1518-10000
Flow Control	☒ Disabled ☐ Enabled Flow Control setting will not take effect if Duplex Mode is set to "Half".
	Cancel OK

Port Basic Settings Edit port

Users can define schedules for specific ports, this is to enable precise control over when configurations are applied. These schedules dictate the exact times during which port settings will take effect.

Port	1/0/2
Port Type	Copper
Description	0-128 characters
Port Enable	☒ Enable ☐ Disabled
Scheduled enabled	None
Speed	None Working Hours + Add
Duplex Mode	
Jumbo Frame	9216 Valid range is 1518-12288
Flow Control	☒ Disabled ☐ Enabled ☐ Auto Flow Control setting will not take effect if Duplex Mode is set to "Half".
	Cancel OK

Port Basic Settings scheduled enabled

Setting	Description
Port	The selected port to configure. It can be a Gigabit Ethernet port or an SFP port.
Port Type	Displays the port type, Copper or SFP.
Description	Configures a description for the interface, such as its purpose or connected device. The maximum length is 128 characters.
Port Enable	Enables or disables the interface. Enabled by default.
Scheduled enabled	Selects the schedule during which the physical port or LAG port is enabled.
Speed	Sets the interface rate. Ethernet port (Copper): Auto, 10 Mbps, 100 Mbps, or 1000 Mbps. The default is auto-negotiation. SFP/SFP+ port: Available speed options depend on the selected port and installed module. Notes: When set to Auto, the interface rate is negotiated automatically with the peer port. When configuring a fixed speed, set the peer port to the same value. Otherwise, the port may not function properly.
Duplex Mode	Sets the interface duplex mode. Gigabit Ethernet port options are Auto-negotiation, Full-duplex, and Half-duplex. The default is auto-negotiation. Auto-negotiation: The interface and peer port determine the duplex mode automatically. Full-duplex: The interface can send and receive packets simultaneously. Half-duplex: The interface can send or receive packets, but not simultaneously. Notes: Optical ports support full-duplex mode only. When setting the duplex mode manually, configure the same mode on the peer port. Otherwise, the port may not function properly.
Jumbo Frame	Sets the Jumbo Frame size. The valid range is 1518 to 12288 bytes. The default is 9216 bytes.
Flow Control	Sets flow control to Disabled, Enabled, or Auto. The default is Disabled. When flow control is enabled and congestion occurs, the device can notify its peer to pause packet transmission temporarily to help prevent packet loss. Note: Optical ports do not support auto-negotiation mode.

Port Group

The port group feature allows administrators to logically bundle specific ports together under one group with a corresponding group ID, this can be useful when classifying the switch ports for identifying the usage of each set of ports, for example, ports 1 to 8 can be set with ID 20, these will be the ports connecting Security devices.

Port group settings can facilitate quick batch settings for port group ports.

Overview

Switching

Port Basic Settings

Port Statistics

Loopback Detection

Port Auto Recovery

Link Aggregation

MAC Address Table

Port Group > Edit Port Group

ID

20

Description

Security Devices

0~128 characters

Click on port to select/unselect

Port

2

4

6

8

1

3

5

7

10

12

14

16

18

20

22

24

9

11

13

15

17

19

21

23

25

SFP1

26

SFP2

27

SFP3

28

SFP4

Port Group

Once the Port Group is created, it can ease up the process of selecting and tagging/untagging VLAN ports individually, Under **Switching -> VLAN**, select the port group to be used for your VLAN

VLAN > Edit

VLAN

20

Description

VLAN20

0~64 characters

Member Type

20(Security Devices)

Untagged All

Port

Click port to change the member type

Tagged

Untagged

2

4

6

8

1

3

5

7

10

12

14

16

18

20

22

24

9

11

13

15

17

19

21

23

25

SFP1

26

SFP2

27

SFP3

28

SFP4

LAG

Click port to change the member type

Tagged

Untagged

2

4

6

8

1

3

5

7

10

12

14

9

11

13

Cancel

OK

Port Group Selection

In addition, users can disable/enable specific ports based on the port group created, instead of going through each individual port selection separately:

Port Basic Settings									
Port Basic Settings Port Group Edit Port Group2 All Ports All Port Group1 Port Group2									
☐ Port	Port Type	Description	Status	Link Status	Speed	Duplex		Control	Operation
☐ 1/0/1	Copper	--	Enable	Down	Auto	Auto		Enabled	
☐ 1/0/2	Copper	--	Enable	Down	Auto	Auto		Enabled	
☐ 1/0/3	Copper	--	Enable	Down	Auto	Auto	9216	Disabled	
☐ 1/0/4	Copper	--	Enable	Down	Auto	Auto	9216	Disabled	
☐ 1/0/5	Copper	--	Enable	Down	Auto	Auto	9216	Disabled	
☐ 1/0/6	Copper	--	Enable	Down	Auto	Auto	9216	Disabled	

Delete Port Group

Port Statistics

For monitoring or even sometimes troubleshooting, the Port Statistics displays in real time the flow of data with different units like Octets, Packets, Transmission Rate, and OurErrPackets. The option to clear all the statistics or a specific port is supported as well.

Port Statistics

Statistics Interval (s) 10									
Statistics Clear All									
Port	Receive Rate (bps)	InOctets	InPackets	InErrPackets	Transmit Rate (bps)	OutOctets	OutPackets	OurErrPackets	Operation
1/0/1	--	--	--	--	--	--	--	--	
1/0/2	0	1906491982	1407667	0	0	88053531	636435	0	
1/0/3	--	--	--	--	--	--	--	--	
1/0/4	--	--	--	--	--	--	--	--	

Port Statistics part 1

To view even more details like Etherlike (SNMP), RMON, and port Private MIB information.

Port Statistics									
Statistics Interval (s) 10									
Statistics Clear All									
Port	Receive Rate (bps)	InOctets	InPackets	InErrPackets	Transmit Rate (bps)	OutOctets	OutPackets	OurErrPackets	Operation
1/0/1	4	1906491982	1407667	0	0	88053531	636435	0	
1/0/2	--	--	--	--	--	--	--	--	
1/0/3	--	--	--	--	--	--	--	--	
1/0/4	--	--	--	--	--	--	--	--	

Port Statistics part 2

Loopback Detection

By enabling the loop detection function of the interface, the interface periodically sends detection packets to check whether the packets are returned to the device, and then determines whether there is a loop in the device. If a loop is detected, the port is automatically shut down to eliminate the loop and ensure the normal

operation of the network environment.

Interface Loopback Detection is not effective. If STP is enabled, because STP protection overrides interface Loopback Detection.

Open **Switching -> Loopback Detection**. When Loopback Detection is enabled, **Protocol Type** accepts 0x0 to 0xFFFF and defaults to 0x8999. **Detect Interval (s)** accepts 1 to 1000 seconds and defaults to 30 seconds. A shorter interval detects loops sooner but increases detection traffic.

Loopback Detection

Loopback Detection

Cancel

OK

Port

Edit

Refresh

☐	Port	Loopback Detection	Detection Status	Port Status	Time Left (s)	Operation
☐	1/0/1	Disabled	Disabled	normal	0	
☐	1/0/2	Disabled	Disabled	normal	0	
☐	1/0/3	Disabled	Disabled	normal	0	
☐	1/0/4	Disabled	Disabled	normal	0	
☐	1/0/5	Disabled	Disabled	normal	0	

Loopback Detection

Port Auto Recovery

Port Auto Recovery helps recover a port after a specific delay that can be specified by the user. When the following functions of the port trigger the port down, the port automatically returns to the up state after the delay time:

Examples:

- **ARP packet detection:** If the ARP rate in DAI exceeds the set value, the current port will be shut down.
- **STP BPDU Guard:** In spanning tree, the port enables BPDU Guard. When this function is triggered, the port will be shut down.
- **Port Loop:** When the port is self-looping and spanning tree is enabled, the port will be shut down.
- **ACL:** When the ACL rule is matched and the action is shutdown, the port will be shut down.
- **Port Security:** When the number of port MAC addresses exceeds the set number, the port will be shut down.

When the recovery time is up and the port is back up, if the condition that triggers the down occurs again, the port will be shut down again.

Port Auto Recovery

Recovery Items

- ☒ All
- ☒ ARP Packet Detection
- ☒ DHCP Rate Limit
- ☒ Unicast Storm Control
- ☒ Port Loop
- ☒ Port Security
- ☒ STP BPDU Guard
- ☒ Broadcast Storm Control
- ☒ Unknown Multicast Storm Control
- ☒ ACL

Delay Time (s)

30

Valid range is 30-86400.

Cancel

OK

Port

Refresh

Port	ErrDisable Reason	Time Left (s)	Operation
1/0/1	--	0	
1/0/2	--	0	
1/0/3	--	0	

Port Auto Recovery

Link Aggregation

LAG means Link Aggregation Group which groups some physical ports together to make a single high-bandwidth data path. Thus it can implement traffic load sharing among the member ports in a group to enhance the connection reliability.

Link Aggregation Group

There are two load balance modes on these switches, either based on the MAC Address or based on the IP - MAC Address. And in terms of the type of LAG, there are either the static option or to use the LACP or Link Aggregation Control Protocol both of them are supported.

Link Aggregation

Group

LAG Settings

LACP

Load Balance Mode

MAC Address

Cancel

OK

LAG	Description	Type	Link Status	Active Member	Inactive Member	Operation
LAG1	--	Static	Down	--	--	
LAG2	--	Static	Down	--	--	
LAG3	--	Static	Down	--	--	
LAG4	--	Static	Down	--	--	
LAG5	--	Static	Down	--	--	
LAG6	--	Static	Down	--	--	

Link Aggregation Group

Load Balancing Mode	Select your Load balance mode. MAC address - Aggregated group will balance the traffic based on different MAC addresses. Therefore, the packets from different MAC addresses will be sent to different links. IP/Mac Address - Aggregated group will balance the traffic based on MAC addresses and IP addresses. Therefore, the packets from same MAC addresses but different IP addresses will be sent to different links.
Edit Group	Name: Enter the name of the LA Group. Type: Use the drop down menu to specify the type for LAG. Static- The static aggregated port sends packets over active member without detecting or negotiating with remote aggregated port. LACP- The LACP aggregated ports place member into active only after negotiated with remote aggregated port for best reliability. GE: Click on port to check / uncheck which ones will be part of this LAG.

Link Aggregation Port

LAG Port Settings

On this page, the user can Enable the Link Aggregation Group and add a Description as well as specify the speed and the flow control for LAG.

Link Aggregation

Group

LAG Settings

LACP

Edit

☒	Port	Description	Status	Link Status	Speed	Jumbo Frame	Flow Control	Operation
☒	LAG1	--	Enable	Down	1000Mbps	9216	Disabled	
☐	LAG2	--	Enable	Down	1000Mbps	9216	Disabled	
☐	LAG3	--	Enable	Down	1000Mbps	9216	Disabled	
☐	LAG4	--	Enable	Down	1000Mbps	9216	Disabled	
☐	LAG5	--	Enable	Down	1000Mbps	9216	Disabled	
☐	LAG6	--	Enable	Down	1000Mbps	9216	Disabled	

Link Aggregation Port Settings

Port	The selected LAG to be configured.
Description	It is used to configure the information description for this LAG , which can be a description of usage, etc., with a maximum of 128 characters, and the characters limited to input are numbers 0-9 , letters az / AZ and special characters.
Port Enable	Set whether to enable the interface. it is enabled by default.
Speed	Set the rate of the interface, the options are {Auto, 10Mbps, 100Mbps, 1000Mbps}. The default is auto-negotiation. Note: When set to Auto, the rate of the interface is automatically negotiated between the interface and the peer port .
Jumbo Frame	Specify the jumbo frame, valid range is 1518-12288. Default value is 9216
Flow Control	Set the flow control on the interface, the options are { Disabled, Enabled, Auto}. The default is Disabled After enabling it, if the local device is congested, it will send a message to the peer device to notify the peer device to temporarily stop sending packets, after receiving the message, the peer device will temporarily stop sending packets to the local and vice versa. Thus, the occurrence of packet loss is avoided.

Link Aggregation Settings

LACP

LACP or Link Aggregation Control Protocol is based on the priority, and the user can enable a system priority

or even specify the the priority for each port individually.

Link Aggregation

Group

LAG Settings

LACP

System Priority

32768

Valid range is 1-65535

Cancel

OK

LACP List

Edit

☐ Port	Port Priority	Timeout	Operation
☐ 1/0/1	1	Long	
☐ 1/0/2	22	Long	
☐ 1/0/3	1	Long	
☐ 1/0/4	1	Long	
☐ 1/0/5	65	Long	
☐ 1/0/6	1	Long	
☐ 1/0/7	1	Long	

Link Aggregation LACP

System Priority	Set the system priority of LACP, the value range is an integer from 1-65535, the default is 32768.
Edit LACP	Port: Select the switch LAG interface to be configuredPort Priority:Set the LACP protocol priority of the port , the value range is an integer from 1 to 65535 , the default is 1.Note: The smaller the priority value of the port , the higher the LACP priority of the port.Timeout: Set the timeout time for receiving LACP packets, the options are { Short, Long} , the default is Short. Short mode: the default timeout period for receiving LACP protocol packets is 3 seconds. Long mode: the default timeout period for receiving LACP protocol packets is 90 seconds .

Link Aggregation - LACP

MAC Address Table

The MAC address table records the correspondence between the MAC addresses of other devices learned by the switch and the interfaces, as well as information such as the VLANs to which the interfaces belong. When forwarding a packet, the device queries the MAC address table according to the destination MAC address of the packet. If the MAC address table contains an entry corresponding to the destination MAC address of the packet, it directly forwards the packet through the outbound interface in the entry. If the MAC address table does not contain an entry corresponding to the destination MAC address of the packet , the device will use broadcast mode to forward the packet on all interfaces in the VLAN to which it belongs except the receiving interface.

The entries in the MAC address table are divided into **Dynamic Address**, **Static MAC Address**, **Black hole Address** and **Port Security Address**.

Dynamic Address

the MAC address table is established based on the automatic learning of the source MAC address in the data frame received by the device. If the MAC address entry does not exist in the MAC address table, the device adds the new MAC address and the interface and VLAN corresponding to the MAC address as a new entry into the MAC address table. The switch updates the entry by resetting the aging time.

Aging Time (s):

Dynamic MAC address entries have a lifetime measured in seconds. An entry is removed if it is not refreshed before the timer expires. The verified range is **0 or 60 to 1000000 seconds**, and the default is **300 seconds**. Setting the value to 0 disables aging for dynamic entries.

- The value range is 0 or 60-1 000000, **the default is 300**. If it is set to 0, it means that dynamic MAC address entries will not be aged
- Dynamic table entries are lost after system restart.

MAC Address Table

Dynamic Addresses

Static MAC Addresses

Blackhole Addresses

Port Secure Addresses

Aging Time (s)

300

Valid range is 0 and 60-1000000

Cancel

OK

Dynamic Addresses

Refresh

Add as Static MAC Address

Q VLAN/MAC Address/Port

☐	VLAN	MAC Address	Port
☒	1	08-00-00-01-00-00	1/0/7
☒	1	08-00-00-01-00-00	1/0/7
☐	1	08-00-00-01-00-00	1/0/7
☐	1	08-00-00-01-00-00	1/0/7
☐	1	08-00-00-01-00-00	1/0/7

Dynamic MAC Address Table

Click on the **"Refresh"** button to update the table, or click on the **"Add Static MAC Address"** button to add the entry to the static MAC address.

Static MAC Address

This section allows the user to manually assign a MAC address to the MAC table. The configuration result will be displayed on the table listed on the lower side of this web page.

The static MAC address must be unicast.

MAC Address Table

Dynamic Addresses

Static MAC Addresses

Blackhole Addresses

Port Secure Addresses

Add Static Address

Static MAC address must be unicast

*MAC Address

:

:

:

:

:

*VLAN

Valid range is 1-4094

*Port

Cancel

OK

Static MAC Address

MAC Address	Enter the MAC address that will be forwarded
VLAN	This is the VLAN group to which the MAC address belongs.
Port	Select the port where received frame of matched destination MAC address will be forwarded to.

Static MAC Address

Black Hole Address

If a MAC address is not trusted or insecure, The user can block the traffic of certain MAC Addresses and discard them by adding them to the Black Hole Address Table.

Click on the **"Add"** button then enter the MAC Address and the VLAN.

MAC Address Table

Dynamic Addresses
Static MAC Addresses
Blackhole Addresses
Port Secure Addresses

Add Blackhole Address

Blackhole MAC address must be a unicast address.

*MAC Address

:

:

:

:

:

*VLAN

Valid range is 1-4094

Cancel

OK

to filter out illegal MAC addresses

Black Hole Address

Port Security Address

After enabling port security in **Security -> Port Security**, the addresses will be displayed in the **MAC Address Table -> Port Security Address** synchronously.

The list shows the interface name, VLAN, and MAC address.

To edit, delete or add security addresses, please navigate to **Security -> Port Security**.

MAC Address Table

Dynamic Addresses	Static MAC Addresses	Blackhole Addresses	Port Secure Addresses
-------------------	----------------------	---------------------	-----------------------

Refresh

VLAN	MAC Address	Type	Port
 No Data			

Port Security Address

VLAN

A virtual local area network, virtual LAN or VLAN, is a group of hosts with a common set of requirements that communicate as if they were attached to the same broadcast domain, regardless of their physical location. A VLAN has the same attributes as a physical local area network (LAN), but it allows for end stations to be grouped together even if they are not located on the same network switch. VLAN membership can be configured through software instead of physically relocating devices or connections.

A user can click on "Add" button to add a new VLAN, also it's possible to create many VLANs at the same time by specifying a range, for example (7-9) will create VLAN 7,8 and 9, or create different separated VLANs, for example (11,89) will create VLAN 11 and 89.

VLAN ID valid range is from 2 to 4094. VLAN 0,1 and 4095 are reserved for the system.

VLAN

VLAN

Port Settings

Port Members

Voice VLAN

OUI

MAC VLAN

Protocol VLAN

Add

Delete

Delete All

☐	VLAN	Description	Tagged Port	Untagged Port	Operation
☐	1	Default	--	1/0/1-1/0/6,1/0/8,1/0/18-1/0/28,LAG2-...	
☐	7	Support	1/0/24	1/0/7	
☐	9	Sales	1/0/24	1/0/9-1/0/16	
☐	11	Guests	1/0/24	1/0/17,LAG1,LAG5	

VLAN tab

Add VLAN

*VLAN IDs

Valid range is 2-4094. Example: "5-8, 11" will associate VLANs 5, 6, 7, 8 and 11.

3-9,11

Cancel

OK

Add a VLAN

If the VLAN is already created there is also the option to modify it by clicking on modify button for more options and settings like Description, Tagged and Untagged ports and LAGs.

VLAN

7

Description

VLAN7

1-64 alphanumeric characters and special characters .@_

Member Type

Port

Click port to change the member type

T Tagged

U Untagged

2

4

6

8

10

12

14

16

18

20

22

24

1

3

5

7

9

11

13

15

17

19

21

23

25 SFP1

26 SFP2

27 SFP3

28 SFP4

LAG

Click port to change the member type

T Tagged

U Untagged

Cancel

OK

Edit VLAN

VLAN	The specified VLAN ID
Description	Enter a brief comment for the VLAN ID.
Member Type	Select from the drop-down list: Remove All: remove all ports GE/LAG from this VLAN Tagged All: Tag all ports GE/LAG to this VLAN Untagged All: Untag all ports GE/LAG from this VLAN
GE	Select individually which ports are tagged, untagged or unselected.Note: Unselected ports will not be part of the VLAN Tagged ports expects tagged frames (Trunk port) like connecting a switch with another switch. Untagged ports expects non-tagged frames (Access port) like connecting a switch with end device.
LAG	Select individually which LAGs are tagged, untagged or unselected.

Edit VLAN

Please refer to the table below for more details about Tagged and Untagged Ports.

Port Type	Receiving Packets		Forwarding Packets
	Untagged Packets	Tagged Packets	Tagged Packets
Untagged	When untagged packets are received, the port will add the default VLAN tag, i.e. the PVID of the ingress port, to the packets.	If the VID of packet is allowed by the port, the packet will be received. If the VID of packet is forbidden by the port, the packet will be dropped.	The packet will be forwarded after removing its VLAN tag
Tagged			The packet will be forwarded with its current VLAN tag

VLAN Tagged and Untagged

VLAN Port Settings

The Port Settings page allows for configuring VLAN on each port and LAG by specifying the Link Type (Trunk, Access, Hybrid, or QinQ) as well as the default VLAN or PVID, the user can also enable Ingress Filtering for the selected port, also the accepted Frame Type (All, Tag Only and Untag only) and more.

Port	1/0/1	
*Link Type	Trunk ^	
*PVID	Hybrid Access Trunk QinQ 0x8100	
Accept Frame Type		
TPID	0x8100	
VLAN Translation	☐	
Cancel OK		

Valid range is 1-4094

VLAN Port Settings Link types

Port	1/0/1		
*Link Type	Trunk v		
PVID	1 v		
Accept Frame Type	☒ All ☐ Tag Only ☐ Untag Only		
TPID	0x8100 v		
VLAN Translation	☒		
Ingress	☐		

VLAN Mapping1

*Outer VLAN ⓘ
Inner VLAN ⓘ
*VLAN after Outer Mapping ⓘ
VLAN after Inner Mapping ⓘ

Add +

Cancel
OK

VLAN Port Settings VLAN Translation

Port	1/0/2		
Link Type	Hybrid		
PVID	1	Valid range is 1-4094	
Accept Frame Type	☒ All ☐ Tag Only ☐ Untag Only		
TPID	0x8100		
Ingress Filtering	☒		
VLAN Translation	☐		
MAC VLAN	☐		
Protocol VLAN	☒		
Protocol Template	Protocol Template 	VLAN	802.1p Add Remove
Cancel OK			

VLAN Port Settings Protocol Template

Port?	Shows the selected Port.
Link Type	Select the Link Type:Hybrid: Used for connection between switches, or switch and computer.Access: used to connect the switch and the user terminal.Trunk: used for interconnecting switches or connecting switches and routers, and can carry data frames of multiple different VLANs.QinQ: This is an extended VLAN tagging technique where an additional VLAN tag is added, also known as "double tagging." It allows Layer 2 tunneling and is often used by service providers to transport customer VLANs.
PVID	Enter the default VLAN ID.
Accept Frame Type	Specifies which types of Ethernet frames are accepted by the port. Options vary depending on the selected Link Type:Hybrid:All: Accept both tagged and untagged frames (default).Tag Only: Accept only tagged VLAN frames; untagged packets will be dropped.Untag Only: Accept only untagged frames; tagged frames will be dropped.Access:All: Only this option is available. Untagged traffic is mapped to the configured PVID.Trunk:All: Accept both tagged and untagged frames; untagged frames are assigned to the PVID (default behavior).Tag Only: Accept only tagged frames; untagged traffic will be dropped (disables native VLAN).QinQ:All: Only this option is available due to double tagging structure.Note: Setting Tag Only is the recommended method to disable native VLAN behavior on trunk and hybrid ports, providing better traffic control and increased security.
Ingress Filtering	Set whether to enable the inbound filtering function of the interface.Ingress Filtering is only available for Hybrid port, and it's enabled by default.Note: Ingress filtering is a method used by enterprises and internet service providers (ISPs) to prevent suspicious traffic from entering a network.
VLAN Translation	Allows translating one VLAN ID to another at the port level. It's useful for scenarios where different parts of the network use different VLAN IDs but need to communicate with each other.
MAC VLAN	Allows the switch to assign VLANs based on the MAC address of the incoming traffic. It can be used for more dynamic VLAN assignment, where devices can be automatically placed into specific VLANs based on their MAC addresses.

Protocol VLAN	Allows VLAN assignments based on the protocol type in the frame, such as IP or ARP. It enables grouping traffic from certain protocols into specific VLANs for easier network management.
---------------	---

VLAN Port Settings

VLAN Port Members

On this page, the user can define both Tagged and Untagged VLANs (members) for each port individually.

Example: Enter "5-8, 11" to associate 5 VLANs of "5, 6, 7, 8 and 11".

VLAN

VLAN

Port Settings

Port Members

Voice VLAN

OUI

MAC VLAN

Protocol VLAN

Port	Link Type	Tagged VLAN	Trunk Allowed VLANs	Untagged VLAN	PVID	Operation
1/0/1	Trunk	--	--	1	1	
1/0/2	Trunk				1	
1/0/3	Trunk				1	
1/0/4	QinQ				1	
1/0/5	Trunk				1	
1/0/6	Trunk				1	
1/0/7	Trunk				1	
1/0/8	Trunk				1	
1/0/9	Trunk				1	
1/0/10	Trunk				1	
LAG1	Trunk				1	
LAG2	Trunk				1	
LAG3	Trunk				1	
LAG4	Trunk				1	

Edit Port Member

Port

1/0/4

Link Type

QinQ

Untagged VLAN

1

PVID

QinQ port. Same as Untagged VLAN

1

Cancel

OK

VLAN Port Members QinQ

Trunk Allowed VLANs allow the configuration of VLANs that do not yet exist on the switch and are only effective for configured VLANs.

VLAN
Port Settings
Port Members
Voice VLAN
OUI
MAC VLAN
Protocol VLAN

Port	Link Type	Tagged VLAN	Trunk Allowed VLANs	Untagged VLAN	PVID	Operation
1/0/1	Trunk				1	
1/0/2	Trunk				1	
1/0/3	Trunk				1	
1/0/4	QinQ				1	
1/0/5	Trunk				1	
1/0/6	Trunk				1	
1/0/7	Trunk				1	
1/0/8	Trunk				1	
1/0/9	Trunk				1	
1/0/10	Trunk				1	
LAG1	Trunk				1	
LAG2	Trunk				1	
LAG3	Trunk				1	
LAG4	Trunk				1	
LAG5	Trunk				1	
LAG6	Trunk				1	
LAG7	Trunk	--	--	1	1	

Edit Port Member

Port
1/0/5

Link Type
Trunk

Trunk Allowed VLANs
Enter "5-8, 11" to associate 5 VLANs of "5, 6, 7, 8 and 11".

+Untagged VLAN
1

PVID
Trunk port. Same as Untagged VLAN
1

Cancel
OK

VLAN Port Members Trunk

VLAN
Port Settings
Port Members
Voice VLAN
OUI
MAC VLAN
Protocol VLAN

Port	Link Type	Tagged VLAN	Trunk Allowed VLANs	Untagged VLAN	PVID	Operation
1/0/1	Trunk	--	--	1	1	
1/0/2	Trunk	2-16	2-298	1	1	
1/0/3	Trunk	--	--	1	1	
1/0/4	QinQ	--	--	1	1	
1/0/5	Trunk	--	--	1	1	

VLAN Port Members

Voice VLAN

A voice VLAN (virtual local area network) is a dedicated VLAN specifically designed to carry voice traffic, such as IP phone calls. By isolating voice traffic from other types of network traffic, voice VLANs help ensure that voice calls are prioritized and experience minimal latency or jitter. This is critical to maintaining clear and uninterrupted voice communications.

Voice VLAN advantages:

- **Improved voice quality:** By isolating voice traffic from other types of network traffic, voice VLANs help reduce the latency and jitter that can cause choppy or distorted audio during voice calls.
- **Reduced congestion:** By prioritizing voice traffic, voice VLANs help prevent other types of network traffic from interfering with voice calls, even during periods of heavy network usage.
- **Simplified network management:** Voice VLANs can simplify network management by making it easier to troubleshoot and resolve voice-related issues.

For example, when an IP phone is connected to a switch port, the switch can prioritize traffic in the voice VLAN so voice packets are forwarded according to the configured priority.

The user can select more than one way to set up the voice VLAN:

- Auto Voice VLAN
- Tagged OUI
- Tagged OUI using VLAN Tag
- Untagged OUI

For more details, please visit this guide: GWN78xx(P) - Voice VLAN Guide.

To configure Voice VLAN, please navigate to **Web UI -> Switching -> VLAN page -> Voice VLAN tab.**

Field or action	Description
Mode	Select Disabled, Auto Voice VLAN, Tagged OUI, or Untagged OUI.
Voice VLAN ID	Specifies the VLAN used for recognized voice traffic when Auto Voice VLAN is selected. VLAN 1 cannot be used as the Voice VLAN.
CoS/802.1p Priority	Sets the Layer 2 priority from 0 to 7. The default is 6.
DSCP	Sets the IP-layer voice priority from 0 to 63. The default is 46.
CoS Remarking	Available when Tagged OUI or Untagged OUI is selected. Enable it to apply the configured CoS value to recognized voice traffic.
Aging Time	Available when Tagged OUI or Untagged OUI is selected. Sets how long a learned voice-device entry remains valid. The range is 30 to 65536 minutes, and the default is 1440 minutes.
Port Settings	Configure Voice VLAN Status and Mode for the selected port. Status is disabled by default, and the default mode is Manual. In Manual mode, add the port to the Voice VLAN manually.

Voice VLAN settings

VLAN

VLANPort SettingsPort MembersVoice VLAN (selected)OUIMAC VLANProtocol VLAN

Voice VLAN

★Voice VLAN ID

★CoS/802.1p Priority

CoS Remarking

★Aging Time (Min)

Tagged OUI (selected)

Disabled

Auto Voice VLAN

Tagged OUI

Untagged OUI

Valid range is 0-7

1440

Valid range is 30-65536

Cancel

OK

OUI Port Settings

Edit


Port	Status	Mode	Operation
☐ 1/0/1	Disabled	Manual	
☐ 1/0/2	Disabled	Manual	
☐ 1/0/3	Disabled	Manual	

Voice VLAN

OUI

An OUI address is a unique identifier assigned by IEEE (Institute of Electrical and Electronics Engineers) to a device vendor. It comprises the first 24 bits of a MAC address. You can recognize which vendor a device belongs to according to the OUI address. The following table shows the OUI addresses of several

manufacturers. There is also the option to add a custom one based on user needs.

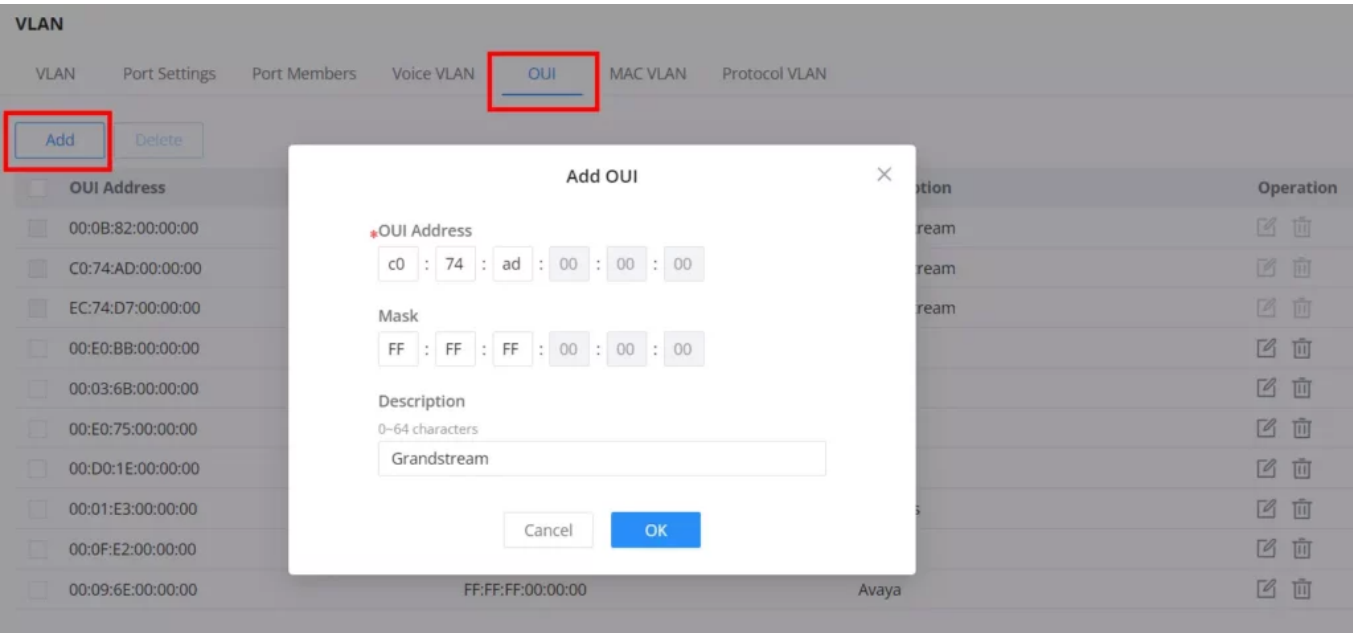

VLAN OUI

MAC VLAN

MAC VLAN is a networking technique where each VLAN is based on the source MAC address of incoming frames. Devices with the same MAC address share a VLAN. This segmentation enables isolated communication between devices within the same VLAN based on MAC addresses.

VLANs are divided according to the source MAC address of the data frame. Through the configured MAC address and VLAN mapping table, when the switch receives an untagged frame, it adds the specified VLAN Tag to the data frame based on the mapping table.

To add a MAC address to VLAN mapping, click on "Add" button then specify the MAC Address, Mask Length, VLAN and the priority (802.1p).

Only effective for Hybrid port.

VLAN

VLAN

Port Settings

Port Members

Voice VLAN

OUI

MAC VLAN

Protocol VLAN

Add

Delete

Delete All

☐

MAC Address

802.1p

Operation

Add MAC VLAN

×

① The MAC address must be a unicast address.

*MAC Address

:

:

:

:

:

*Mask Length

Valid range is 9-48

48

*VLAN

Please select

▼

*802.1p

Valid range is 0-7

0

Cancel

OK

VLAN MAC VLAN

Protocol VLAN

VLANs are divided according to the protocol (family) type and encapsulation format to which the data frame belongs. Through the configured protocol domain and VLAN mapping table in the Ethernet frame, when the switch receives an untagged frame, it adds the specified VLAN Tag based on the mapping table.

Only effective for Hybrid port.

VLAN

VLAN

Port Settings

Port Members

Voice VLAN

OUI

MAC VLAN

Protocol VLAN

Add

Delete

☐

Protocol Index

Frame Type

Protocol Type Value

Operation

Add Protocol VLAN

×

Protocol Index

0

Frame Type

Ethernet II

▼

*Protocol Type Value

Valid range: 0x600-0xFFFE

Cancel

OK

VLAN Protocol VLAN

PVLAN


Private VLAN (PVLAN) is supported on the switches covered by this guide, offering enhanced traffic isolation within the same VLAN domain. This allows more granular segmentation and security, especially useful in shared environments like data centers, hotels, or enterprise access layers.

The PVLAN feature is supported on the following models: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

VLAN Settings

This tab allows assigning a PVLAN type to each VLAN.

1. Go to **Switching > PVLAN > VLAN Settings**.
2. Select a VLAN and click **Edit**.
3. Choose the VLAN type from:
 - **Primary**: Communicates with all other PVLAN types.
 - **Isolated**: Can only talk to Primary VLAN.
 - **Community**: Can talk to Primary and other VLANs in the same Community.
4. Click **OK** then **Save**.

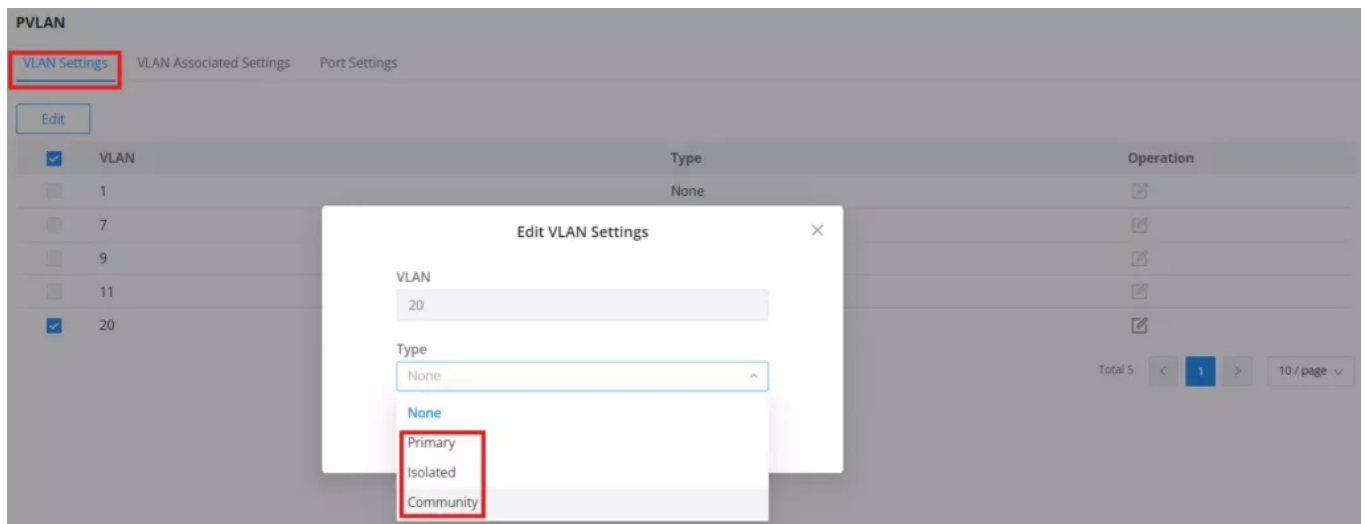

PVLAN VLAN Settings

PVLAN type assignment is required before using VLANs in association or port bindings.

VLAN Associated Settings

This section allows linking VLANs together in a PVLAN structure.

1. Go to **Switching > PVLAN > VLAN Associated Settings**.
2. Click **Add**, then set:
 - **Primary VLAN**: The main VLAN in this association.
 - **Isolated VLAN**: VLAN(s) that only communicate with the Primary.
 - **Community VLAN**: VLAN(s) that communicate with Primary and each other.

3. Use comma-separated lists (e.g., 11,12) or ranges (20-24) as needed.
4. Click **OK** to apply.

The screenshot shows the 'PVLAN' configuration page with three tabs: 'VLAN Settings', 'VLAN Associated Settings' (highlighted with a red box), and 'Port Settings'. Below the tabs are 'Add' and 'Delete' buttons. A table lists VLANs with checkboxes for 'Primary VLAN' and '7'. An 'Operation' column contains edit and delete icons. A modal window titled 'Add VLAN Associated Settings' is open, featuring three input fields: 'Primary VLAN' (containing '7'), 'Isolated VLAN' (containing '8'), and 'Community VLAN' (containing '9'). The 'Community VLAN' field has a note: 'Valid range is 2-4094. Example: "5-8, 11" will associate VLANs 5, 6, 7, 8 and 11.' At the bottom of the modal are 'Cancel' and 'OK' buttons.

PVLAN VLAN Associated Settings

You must assign the correct PVLAN type to each VLAN in the previous tab, or association will fail (e.g., "Vlan-private type error").

Port Settings (PVLAN)

Here you bind switch ports to PVLAN roles.

1. Go to **Switching > PVLAN > Port Settings**.
2. Select a port and click **Edit**.
3. Choose the **Mode**:
 - **Promiscuous**: Communicates with all other PVLAN port types.
 - **Host**: Communicates only with Promiscuous ports.
 - **Community**: Communicates with Promiscuous and other Community ports in the same VLAN.
 - **Trunk Variants**: Used to forward tagged PVLAN traffic.
4. Click **OK** and then **Save**.

Port Settings > **Edit**

The screenshot shows the 'Port Settings' configuration page with a breadcrumb 'Port Settings > Edit'. A table lists ports with columns for 'Port' and 'Mode'. The 'Port' column shows '1/0/1' and the 'Mode' column shows 'Normal'. A modal window is open for editing the port settings, showing the 'Port' field with '1/0/1' and the 'Mode' dropdown menu. The dropdown menu is open, showing the following options: 'Normal' (selected), 'Host', 'Promiscuous', 'Promiscuous Trunk', and 'Host Trunk'.

Do not configure Port Security, MAC Authentication, or 802.1X Authentication on the same port when PVLAN is enabled.

Spanning Tree

STP (Spanning Tree Protocol), Devices running STP discover loops in the network and block ports by exchanging information, in that way, a ring network can be disbranched to form a tree-topological ring-free network to prevent packets from being duplicated and forwarded endlessly in the network.

BPDUs (Bridge Protocol Data Units) are the protocol data that STP, RSTP and MSTP use. Enough information is carried in BPDU to ensure the spanning tree generation. STP is to determine the topology of the network via transferring BPDUs between devices.

This page allows a user to configure and display Spanning Tree Protocol (STP) property configuration including the STP Mode (STP, RSTP or MSTP), Path Cost, Bridge Priority, Max Hops, Hello and Max Aging time and Forward Delay Time.

Spanning Tree

[Global Settings](#) [Port Settings](#) [MST Instance](#) [MST Port Settings](#)

Spanning Tree ☒

Mode

RSTP

Ignore VLAN in BPDU ☒

Path Cost

☒ Short ☐ Long ☐ legacy

Bridge Priority

32768

Enter a value between 0-61440 that is a multiple of 4096

Max Hops

20

Valid range is 1-40

Hello Time (s)

2

Valid range is 1-10

Max Aging Time (s)

20

Valid range is 6-40

Forward Delay Time (s)

15

Valid range is 4-30

Cancel

OK

Status

Bridge ID

32768-C0:74:AD:E3:EA:28

Root Bridge ID

0-00:00:00:00:00:00

Root Port

--

Root Path Cost

0

Spanning Tree Global Settings

Spanning Tree	Set whether to enable Spanning Tree.
---------------	--------------------------------------

Mode	Set the operating mode of Spanning Tree (STP).STP: Standard Spanning Tree Protocol. Provides basic loop prevention but has slow convergence. Use only for compatibility with older or legacy network devices. RSTP: Rapid Spanning Tree Protocol. Faster convergence than STP, suitable for most modern networks. Recommended as the default for typical deployments.MSTP: Multiple Spanning Tree Protocol. Allows grouping of multiple VLANs into a single STP instance. Best suited for large networks with many VLANs that require efficient resource use.PVST+: Per-VLAN Spanning Tree Plus. Runs one STP instance per VLAN, offering detailed control of loop prevention per VLAN. Good for networks with high segmentation.RPVST(+): Rapid Per-VLAN Spanning Tree Plus. Combines the benefits of RSTP and PVST(+), offering fast convergence for each VLAN. Ideal for high-availability environments with VLAN-based traffic control.
Ignore VLAN in BPDU	This feature allows the switch to ignore VLAN-specific information in Bridge Protocol Data Units (BPDUs). This prevents VLAN configurations from influencing Spanning Tree Protocol (STP) decisions across multiple VLANs.
Path Cost	Specify the path cost method (Short, Long, or Legacy). Default is Short.
Bridge Priority	Select the Bridge Priority, In an STP network, the device with the smallest bridge ID is elected as the root bridge.Default is 32768.Note: The valid range is 0~61440, which must be a multiple of 4096
Max Hops	Select the Max Hops (the range is 1 - 40). Default is 20
Hello Time (s)	Specify the Hello Time in seconds (the range is 1 -10). Default is 2.Note: The time interval at which the device running the STP protocol sends the configuration message BPDU , which is used by the device to detect whether the link is faulty.
Max Aging Time (s)	Select The aging time of BPDU packets of the port (the range is 6 - 40). Default is 20.
Forward Delay Time (s)	Specify the Forward Delay Time in seconds (the range is 4 -30). Default is 15.

STP Global Settings

STP Port Settings

To configure STP on each port and LAG then navigate to **WEB UI -> Spanning Tree -> Port Settings**, then click on **"Edit"** button.

Spanning Tree

Global SettingsPort SettingsMST InstanceMST Port Settings

Edit

Port	Port Enable	Priority	Path Cost	Edge Port	BPDU Guard	BPDU Filter	Point-to-Point	Port Status	Operation
☒ 1/0/1	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/2	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/3	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/4	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/5	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/6	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/7	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/8	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/9	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/10	Enabled	128	4	Auto	Disabled	Disabled	Auto	Disabled	
☐ 1/0/11	Enabled	128	4	Auto	Disabled	Disabled	Auto	Forwarding	

Spanning Tree Port Settings

For each port or LAG, the user can enable STP and specify the priority, Path Cost, Edge port, BPDU Guard and Filter and Point-To-Point.

Port Settings > **Edit Port**

Port	1/0/1	
Enable Spanning Tree	☒	
Priority	128	Enter a value between 0-240 that is a multiple of 16
Path Cost	0	Valid range is 0-65535
Edge Port	☒ Auto ☐ Enabled ☐ Disabled	
Root Protection	☐	
Loop Protection	☒	
BPDU Guard	☐	
BPDU Filter	☐	
Point-to-Point	☒ Auto ☐ Enabled ☐ Disabled	
Cancel OK		

Spanning Tree Edit Port Settings

Port	Displays the selected GE/LAG Port.
Enable STP	Set whether to enable STP on this port.
Priority	Priority is an important basis for determining whether the port will be selected as the root port. The port with higher priority under the same conditions will be selected as the root port . The smaller the value , the higher the priority . An integer in the range of 0-240, with a step size of 16, and a default of 128 .Note: The valid range is 0~240, which must be a multiple of 16
Path Cost	Set the path cost of the port on the specified spanning tree. The default value is 0, which means that path cost calculation is performed automatically.Note:The valid range of path cost depends on the path cost settings in Global Settings.If set to "Short" in Global Settings, the valid range is 0-65535; if set to "Long", the valid range is 0-200000000; if set to "legacy", the valid range is 0-200000.
Edge Port	Set whether to enable Edge Port or disable it, by default it's on auto.Notes: A port is considered as an edge port when it is directly connected to the user terminal or server, instead of any other switches or shared network segments. The edge port will not cause a loop upon network topology changes. In the edge mode, the interface would be put into the Forwarding state immediately upon link up. While in auto mode it will detect if the port is an edge or not.
Root Protection	Safeguards the root bridge by preventing designated ports from becoming the root port, thus protecting the current root bridge from being displaced by lower-priority BPDUs.
Loop Protection	Prevents Layer 2 loops by ensuring a blocking state on ports that stop receiving BPDUs, avoiding the formation of network loops.
BPDU Guard	Set whether to enable BPDU Guard.Note: BPDU Guard further protects your switch by turning this port into error state and shutdown if any BPDU received from this port.
BPDU Filter	Set whether to enable BPDU Filter.Note: Drop all BPDU packets and no BPDU will be sent.
Point-to-Point	Select Point-to-Point option (Auto, Enabled or Disabled). Default is Auto.Note: determines the STP of link type for this port automatically if set to Auto.

STP Port Settings

Multiple Spanning Tree Instances

MST, or Multiple Spanning Tree, maps VLAN traffic to separate spanning-tree instances. The **MSTI** value supports instances **0 to 31**. A region is identified by its **Region Name** and **Revision Level**, and switches must use matching region parameters to participate in the same MST region.

Spanning Tree

Global Settings

Port Settings

MST Instance

MST Port Settings

Region Name

C0:74:AD:

1-32 alphanumeric characters and special characters :-_

Revision Level

0

Valid range is 0-65535

Cancel

OK

MSTI	VLAN	Priority	Bridge Identifier	Designated Root Bridge	Root Port	Root Path Cost	Remaining Hop	Operation
0	1-4094	61440	61440-C0:74:AD:DF:CC:94	32767-C0:74:AD:C9:72:E9	1/0/24	4	20	
1	--	32768	61440-C0:74:AD:DF:CC:94	61440-C0:74:AD:DF:CC:94	1/0/24	0	20	
2	--	32768	61440-C0:74:AD:DF:CC:94	61440-C0:74:AD:DF:CC:94	1/0/24	0	20	
3	--	32768	61440-C0:74:AD:DF:CC:94	61440-C0:74:AD:DF:CC:94	1/0/24	0	20	
4	--	32768	61440-C0:74:AD:DF:CC:94	61440-C0:74:AD:DF:CC:94	1/0/24	0	20	

Multiple Spanning Tree Instances

MST Instance > Edit MST Instance

MSTI

0

VLAN

1-4094

Enter "5-8, 11" to associate 5 VLANs of "5, 6, 7, 8 and 11".

Priority

61440

Enter a value between 0-61440 that is a multiple of 4096

Cancel

OK

Bridge Identifier

61440-C0:74:AD:

Designated Root Bridge

32767-C0:74:AD:

Root Port

1/0/24

Root Path Cost

4

Remaining Hop

20

MST Edit Port

MST Port Settings is used to configure the GE port / LAG group settings for each MST instance. The table displays the MST parameters for each port.

Spanning Tree

Global Settings Port Settings MST Instance MST Port Settings

MSTI

0

Port Settings

Edit

Refresh

☒	Port	Path Cost	Priority	Role	Status	Mode	Type	Designated Bridge ID	Operation
☒	1/0/1	4	128	Disabled Port	Disabled	STP	Boundary	0-00:00:00:00:00:00	
☒	1/0/2	4	128	Disabled Port	Forwarding	STP	Boundary	61440-C0:74:AD: [redacted]	
☐	1/0/3	4	128	Disabled Port	Disabled	STP	Boundary	0-00:00:00:00:00:00	
☐	1/0/4	4	128	Disabled Port	Disabled	STP	Boundary	0-00:00:00:00:00:00	
☐	1/0/5	4	128	Disabled Port	Disabled	STP	Boundary	0-00:00:00:00:00:00	
☐	1/0/6	4	128	Disabled Port	Disabled	STP	Boundary	0-00:00:00:00:00:00	
☐	1/0/7	4	128	Disabled Port	Disabled	STP	Boundary	0-00:00:00:00:00:00	

MST Port Settings

Click on "Edit" button to edit the MST Port Settings for each Port/LAG individually and also the user can even specify the Path Cost and Priority per Port/LAG as well.

MST Port Settings > **Edit MST Port Settings**

MSTI

0

Port

1/0/2

*Path Cost ⓘ

0

Valid range is 0-65535

*Priority

128

Enter a value between 0-240 that is a multiple of 16

Cancel

OK

Port Role Disabled Port

Port Status Forwarding

Mode STP

Type Boundary

Designated Bridge ID 61440-C0:74:AD: [redacted]

Designated Port ID 128-2

Designated Path Cost 4

Remaining Hop 20

MST Port Settings Edit port

PVST VLAN Settings

When Per VLAN Spanning tree protocol is selected as the STP protocol to be used, then the VLAN settings can be defined.

Spanning Tree						
Global Settings Port Settings VLAN Settings PVST Port Settings						
VLAN	Enable PVST	Bridge Priority	Hello Time (s)	Max Aging Time (s)	Forward Delay Time (s)	Operation
1	Enabled	32768	2	20	15	
7	Disabled	32768	2	20	15	
Total 2 < 1 > 10 / page						

The below parameters are to be configured:

VLAN	Displays the VLAN on which the PVST rule will PVST protocol will be applied
Enable PVST	Enables/disables PVST per VLAN
Bridge Priority	Defines the bridge priority for the VLAN, valid range is 0-61440, default value is 32768. Note: All values should be a multiple of 4096
Hello Time (s)	Specify the Hello Time in seconds (the range is 1 -10). Default is 2. Note: The time interval at which the device running the STP protocol sends the configuration message BPDU , which is used by the device to detect whether the link is faulty.
Max Aging Time (s)	Select The aging time of BPDU packets of the port (the range is 6 - 40). Default is 20.
Forward Delay Time (s)	Specify the Forward Delay Time in seconds (the range is 4 -30). Default is 15.

PVST Port Settings

The PVST Port settings defines the priority and path cost for each port of the switch , per each vlan, It also displays, for each port, its role, designated Bridge ID, designated Port ID, and designated Path Cost.

Spanning Tree									
Global Settings Port Settings VLAN Settings PVST Port Settings									
VLAN 1									
Port Settings									
Edit Refresh									
☐	Port	Path Cost	Priority	Role	Status	Designated Bridge ID	Designated Port ID	Designated Path Cost	Operation
☐	1/0/1	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/2	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/3	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/4	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/5	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/6	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/7	18	128	Designated Port	Forwarding	32769-EC:74:D7:3D:90:A4	128-7	18	
☐	1/0/8	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/9	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/10	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/11	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/12	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/13	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	
☐	1/0/14	65535	128	Disabled Port	Disabled	0-00:00:00:00:00:00	0-0	65535	

The parameters to be defined are

Port	Displays the port, or ports that the settings will be applied on.
Priority	Displays the single port priority. valid range is 0-240 and the default value is 18. Note: The value must be a multiple of 16

Path Cost	Configures the port path cost for the port on the specified spanning tree. The value must be an integer between 0-65535. The default value is 0, which means the path cost calculation will be performed automatically.
-----------	---

IP

VLAN IP Interface

Hosts in different VLANs cannot communicate directly and need to be forwarded through routers or layer 3 switching protocols.

A VLAN interface is a virtual interface in Layer 3 mode and is mainly used to implement Layer 3 communication between VLANs, it does not exist on the device as a physical entity. Each VLAN corresponds to an interface by configuring an IP address for it, it can be used as the gateway address of each port in the VLAN so that packets between different VLANs can be forwarded to each other on Layer 3 routing through the VLAN interfaces. GWN switches support IPv4 interfaces as well as IPv6.

IPv4/IPv6 Interface

To add an IP Interface, please click on the **"Add"** button, refer to the figure below:

VLAN IP Interface					
IPv4 Interface IPv6 Interface IPv6 Router Advertisements MGMT VLAN					
Add	Delete	All All Types Q. VLAN/IP Address			
IPv4 Interface	Status	Type	IPv4 Address	MTU	Operation
Loopback1	UP	Static	--	1500	Edit Delete Refresh
* VLAN 1	UP	Dynamic	192.168.50.168/24	1500	Edit Delete Refresh

Total 2 < 1 > 10 / page

VLAN IP Interface MGMT VLAN

Use the **"refresh icon"** to request a new IP address from the DHCP server. This action will prompt a confirmation dialog; clicking "OK" will obtain a new IP address, which may change upon successful retrieval.

Confirm to get IP address again?

Once successfully obtained, the IP address may be changed

Cancel

OK

Refresh IP address

Address Type:

Field or action	Description
IPv4 Address Type	Select Static IP to enter an address and mask, or DHCP to obtain the IPv4 settings automatically.

Gateway Priority	Displayed when DHCP is selected. Accepts 2 to 255; a lower value has higher priority.
MTU	Accepts 1280 to 9216 bytes.
Static mask length	When Mask Length is selected, the accepted range is 8 to 30.

IPv4 interface address settings

- **If DHCP is selected:** hosts will obtain IP addresses automatically from whatever DHCP pool configured from example like a router.

Edit IPv4 Interface

VLAN

VLAN 1

IPv4 Address Type

☐ Static IP

☒ DHCP

*Gateway Priority

Valid range is 2-255

2

*MTU

Valid range is 1280-9216

1500

Cancel

OK

Add VLAN IP Interface DHCP IPv4

IPv6 Interface > Edit IPv6 Interface

VLAN

VLAN 1

IPv6 Enable

☒

Link-Local Address

☒ Auto Generate

☐ Manually Configure

Global Unicast Address

SLAAC

*Gateway Priority

2

Valid range is 2-255

*MTU

1500

Valid range is 1280-9216

Cancel

OK

Gateway Priority: valid range from 2 [very important] to 255 [least important],

MTU (Maximum Transmission Unit): valid range is 1280-9216.

- **If Static IP is selected:** the user can specify the IPv4 or IPv6 manually.

Add IPv4 Interface

***VLAN**

Valid range is 1-4094.

IPv4 Address Type



Static IP



DHCP

***IPv4 Address**

Mask



***Prefix Length**

Valid range is 8-30.

***MTU**

Valid range is 128-9216.

Add VLAN IP Interface

Gateway Usage Priority:

- Statically configured gateway (manually set) has the highest priority.
- Gateway with a specified priority (smaller priority value means higher priority).
- If priorities are the same, the gateway with the smaller VLAN ID will be used.

IPv6 Router Advertisements

IPv6 Router Advertisements (RAs) are messages sent by routers to provide information to devices on the network, such as the default gateway, DNS servers, and network prefixes. These advertisements help devices configure their IP addresses and routing automatically without the need for manual configuration. In the VLAN IP Interface section, you can configure RAs for each VLAN to manage IPv6 network settings.

VLAN IP Interface

IPv4 InterfaceIPv6 InterfaceIPv6 Router Advertisements

IPv6 Interface	Interface Enable	Route Information	Timeout (s)	Lifetime (s)	Flag	Number	Operation
* VLAN 1	Disabled	Disabled	600	1800	--	0	
VLAN 7	Disabled	Disabled	600	1800	--	0	
VLAN 9	Disabled	Disabled	600	1800	--	0	

IPv6 Router Advertisement

In the Edit IPv6 Router Advertisements screen, you can customize settings for a specific VLAN. This includes enabling or disabling the interface, setting route information, and configuring timeouts and lifetimes for the advertisements. You can also define IPv6 addresses and prefixes, adjust flags for additional configurations, and set the priority of the default route. This allows for fine-tuning the behavior of the advertisements to suit your network requirements.

IPv6 Router Advertisements > Edit IPv6 Router Advertisements

VLAN

VLAN 1

Interface Enable

☐

Route Information

☐

*Timeout (s)

600

Valid range is 1-1800

*Lifetime (s)

1800

Valid range is 0-9000

Flag

☐ M Flag ☐ O Flag

Default Route Priority

中

IPv6 Address/Prefix1

*IPv6 Address/Prefix

/

64

Prefix range 1-128

*Valid Lifetime (s)

2592000

Valid range is 0-4294967295

*Preferred Lifetime (s)

604800

Valid range is 0-4294967295

Flag ⓘ

☒ A Flag ☐ L Flag ☐ R Flag

Add +

Cancel

OK

Edit IPv6 Router Advertisement

MGMT VLAN

When you assign an IP address to the management VLAN interface, the system synchronizes this IP

configuration with the corresponding VLAN interface in the device's Layer 3 IP interface configuration. This ensures that the IP address used for managing the device is consistent with the VLAN's routing and switching setup.

For example, if you configure the management VLAN with an IP address 192.168.2.100 on VLAN 2, this IP will also be reflected in the IP interface configuration for VLAN 2, ensuring both management and routing functions are aligned.

VLAN IP Interface

IPv4 Interface

IPv6 Interface

IPv6 Router Advertisements

MGMT VLAN

MGMT VLAN

VLAN 2

IPv4 Address Settings

Address Type

Static IP

DHCP

IP Address

192.168.2.100

IPv4 format

Mask

Subnet Mask

Mask Length

Mask Length

24

Valid range is 8-30

Static Gateway

IPv4 format

IPv6 Address Settings

Enable

Cancel

OK

Management Address

MGMT VLAN	VLAN 2
Status	DOWN
IPv4	
Address Type	Static
IP Address	192.168.2.100
Mask Length	24

MGMT VLAN

DHCP Server

When creating a VLAN IP Interface with a static IP, the user can link it with a DHCP Server for hosts to obtain IP addresses.

Please navigate to the **Web UI -> IP -> DHCP Server** page.

Step 1: Enable DHCP Server.

DHCP Server

DHCP Server

Address Table

DHCP Service



Cancel

OK

Address Pool Settings

Add

Delete

All

Q Name

☐	Address Pool Name	Type	VLAN IPv4 Interface	Address Pool	Used	Remained	Operation
☐	Guest network	Interface	VLAN 9	90.0.0.2-90.0.0.254	0	253	
☐	7	Interface	VLAN 7	70.0.0.7-70.0.0.77	1	70	

DHCP Global Settings

Step 2: on **Address Pool Settings** section, click on "Add" button to add a new address pool.

- Global address pool is only used for IP address allocation to DHCP relay.
- When a VLAN is configured to use DHCP to automatically get an IP address, the system can now prioritize which **gateway** (the device routing traffic to other networks) to use.

Add a pool range for the DHCP Server, then select the interface (VLAN).

DHCP Server > Add Address Pool

*Address Pool Name

Network_7_pool

1~64 characters

Type

Interface

*Interface

VLAN 7

*IPv4 Pool

70.0.0.2

-

70.0.0.254

*Duration (min)

120

Valid range is 1-11520

DNS Server

1.1.1.1

WINS Server

Netbios Node Type

DHCP Option1

DHCP Option

The range is 2-254 (excluding 50-54, 56, 58, 59, 61 and 82)

Type

Hex

Option Content

0-256 characters, and must be even

Add

Cancel

OK

DHCP Add Pool

In this section, the user can configure DHCP Options like the type, Service (for option 43), and option content. It's also possible to add more DHCP Options by clicking on the "Add" icon as shown below:

Duration (min)

120

Valid range is 1-2880

DNS Server

Add

WINS Server

Add

Netbios Node Type

DHCP Option1

DHCP Option

43

The range is 2-254 (excluding 50-54, 56, 58, 59, 61 and 82)

Type

ASCII

Service

Custom

Option Content

0-255 characters

Add

Cancel

OK

DHCP Server Add Pool DHCP Options

The address table will displays the hosts (devices) MAC Addresses and the IP addresses when using the DHCP Server. Also it's possible make a entry a static one by clicking on "Add as Static Binding IP" button.

Field or action	Description
Address pool	Set Address Pool Name, enable state, and Type. Global pools use IP Pool Subnet and Mask Length; Interface pools use an interface and an IPv4 Pool range.
Lease and client settings	Configure Gateway, Duration (min) from 1 to 11520, DNS Server, WINS Server, and Netbios Node Type.
DHCP Option / Type / Option Content	Enter the option code, choose the content type, and enter Option Content. Hex content accepts 0 to 256 characters and must contain an even number of characters.
Address Table search	Use IPv4 Address/Client Name/Client MAC Address to filter leases. The table identifies the client MAC address, IPv4 address, lease type, remaining lease, and available operation.

DHCP Server controls

DHCP Server

DHCP Server

Address Table

Add

Refresh

Add as Static Binding IP

Delete

Q IPv4 Address/Client Name/C...

☒	Client Name (MAC Address)	IPv4 Address	Type	Remaining Lease (s)	Operation
☒	C0:74:AD:93:0C:F8	70.0.0.32	Dynamic	6926	

Total 1

<

1

>

10 / page

DHCP Relay

DHCP relay allows the switch to pass DHCP messages between clients and servers on different networks. Use it when one DHCP server must serve clients on multiple subnets or VLANs. A DHCP relay agent is a network device that can route between the client's subnet and the server's subnet. The relay agent gets the broadcast request from the client and sends it to the server, putting its own interface address as the gateway address (giaddr) field in the packet. This way, the server can tell which subnet the client is on and assign a suitable IP address. The server then sends the reply back to the relay agent, which passes it to the client.

DHCP Relay

DHCP Relay

Polling

*TTL

4

Valid range is 1-16.

Cancel

OK

DHCP Server

Add

Delete

Interface	DHCP Server	Operation
☐ VLAN 7	192.168.7.1	

Total 1

<

1

>

10 / page

DHCP Relay

DHCP Relay	Set whether to enable the global DHCP relay functionthe default is off.
Polling	Set whether to enable the polling function of the DHCP relay disabled by default.
TTL	Set the TTL value of the DHCP request message after being forwarded by the DHCP relay layer 3.the value is an integer from 1 to 16 , and the default is 4 .
DHCP Server	
Interface	Select from the existing VLAN interfaces.
DHCP Server	Set the address of the DHCP server.Note: The DHCP server address cannot be the interface IP address of the DHCP relay gateway , otherwise the DHCP client cannot obtain an IP address.

DHCP Relay

ARP Table

Address Resolution Protocol ARP is a protocol used to resolve IP addresses to MAC addresses. In a local area network, when a host or three-layer network device has data to send to another host or three-layer network device, it needs to know the other party's network layer address (IP address) because IP addresses must be encapsulated into frames to be sent over the physical network, the sender also needs to know the receiver's actual physical address (MAC address), which requires a mapping from IP to MAC address. ARP implements the resolution of IP addresses into MAC addresses. A host or Layer 3 network device maintains an ARP table to store the relationship between IP addresses and MAC addresses. ARP entries include dynamic ARP entries and static ARP entries.

Dynamic ARP entry: It is automatically generated and maintained by the ARP protocol through ARP packets, can be aged out, can be updated by new ARP packets, and can be overwritten by static ARP entries. When the aging time is reached and the interface is down, the device immediately deletes the dynamic ARP entry in response.

Static ARP entry: A fixed mapping relationship between IP addresses and MAC addresses manually established by the network administrator, which will not be aged out and will not be overwritten by dynamic ARP entries, which can ensure the security of network communication. Static ARP entries can restrict the local device to use only the specified MAC address when communicating with the peer device with the specified IP address, in this case, the attack packet cannot modify the mapping relationship between the IP address and the MAC address in the ARP table of the local device thus the normal communication between the local device and the peer device is protected.

To configure the ARP Table, please navigate to **Web UI -> IP -> ARP Table**.

Field or action	Description
Aging Time (s)	Sets dynamic-entry aging from 60 to 21600 seconds.
Table actions	Use Add, Refresh, Add as Static ARP, or Delete. Select a learned entry before converting it to a static entry.
Filter and search	Filter by All Types or use VLAN/IP Address/MAC Address search.
Add Static ARP	Select the VLAN, enter the IP Address, and enter a unicast MAC Address.

ARP Table controls

ARP Table

*Aging Time (s)

1200

Valid range is 15-21600.

Cancel

OK

ARP Table

Add

Refresh

Add as Static ARP

Delete

All

Q IP Address/MAC Address

☐	VLAN	IP Address	MAC Address	Interface	Type	Expiration Time (s)	Operation
☐	VLAN 1	192.168.80.1	c0:74:ad:23:aa:64	1/0/8	Dynamic	1113	
☒	VLAN 1	192.168.80.88	e8:f4:08:3b:62:ff	--	Static	--	
☒	VLAN 1	192.168.80.77	e8:f4:08:3b:62:fd	1/0/8	Dynamic	1176	

ARP Table

Aging time (seconds): Set the aging time of dynamic ARP entries. After the aging time expires, dynamic ARP entries are automatically deleted. The value range is an integer from 15 to 21600, and the default is 1200 seconds.

ARP Table

Add

Refresh

Add as Static ARP

Delete

All

Q IP Address/MAC Address

☐	VLAN	IP Address	MAC Address	Interface	Type	Expiration Time (s)	Operation
☐	VLAN 1	192.168.80.1	c0:74:ad:23:aa:64	1/0/8	Dynamic	1073	
☐	VLAN 1	192.168.80.88	e8:f4:08:3b:62:ff	--	Static	--	
☐	VLAN 1	192.168.80.77	e8:f4:08:3b:62:fd	1/0/8	Dynamic	1127	

ARP Table Operation

- Click on "**Link**" icon to make the dynamic entry as a static entry.
- Click on "**Delete**" icon to delete the static entry.
- Click on the "**Modify**" icon to modify the static entry

It's also possible to add a static ARP entry manually by clicking on the "**Add**" button, then specify the VLAN, IP Address, and MAC Address combination.

X

ⓘ The MAC address must be an unicast one.

***VLAN**

▼

***IP Address**

IPv4 format

***MAC Address**

:::::

Cancel

OK

Add Static ARP

Neighbor Discovery

Neighbor Discovery Protocol (NDP) is an important basic protocol in the IPv6 protocol system it replaces the ARP and ICMP router discovery of IPv4. It defines the use of ICMPv6 packets to achieve address resolution, neighbor unreachability detection, duplicate address detection, router discovery, redirection, ND proxy, and other functions.

IPv6 address auto-configuration and router discovery rely on two kinds of ICMPv6 messages: RS (Router Solicitation) and RA (Router Advertisement). Hosts send RS messages to ask routers on the same link to send RA messages right away. Routers send RA messages to let hosts know they are there and give them information like IPv6 prefixes, hop limit, MTU, and configuration flags.

To configure ND please navigate to **Web UI -> IP -> Neighbor Discovery**.

Neighbor Discovery

*Aging Time (s)

1200

Valid range is 15-21600.

Cancel

OK

Neighbor Table

Add

Refresh

All Types

All (Router)

Q VLAN/IP Address/MAC Addr...

☐ VLAN	IPv6 Address	MAC Address	Interface	Type	Expiration Time (s)	Router	Status	Operation
-------------------------------	--------------	-------------	-----------	------	---------------------	--------	--------	-----------



Neighbor Discovery

Aging time (seconds): Set the aging time of dynamic neighbor entries. After the aging time expires, the dynamic neighbor entry is automatically deleted. The value range is an integer from 15 to 21600, and the default is 1200 seconds.

Aging time applies only to dynamic entries.

Click on "**Refresh**" button to refresh the list for dynamic entries or click on "**Add**" button to add a static entry, refer to the figure below:

Add Static Neighbor



The MAC address must be an unicast one.

*VLAN

7

*IPv6 Address

e90d:f398:767d:b89f:a88e:0e6e:319d:af15

*MAC Address

c0

:

74

:

ad

:

11

:

22

:

33

Cancel

OK

Add Static Neighbor

Select the VLAN from the drop-down list then enter the unicast IPv6 address and MAC address then click on

"OK" button.

DNS

Domain Name System DNS provides translation services between domain names and IP addresses. Each switch acts as a DNS client. When users perform certain applications on the device (such as Telnet to a device or host), they can directly use a memorable and meaningful domain name, and resolve the domain name to the correct address through the domain name system.

DNS domain name resolution is divided into static domain name resolution and dynamic domain name resolution which can be used together when parsing domain names. If the static domain name resolution is unsuccessful, then dynamic domain name resolution will be used, since dynamic domain name resolution may take a certain amount of time and requires the cooperation of the domain name server, some commonly used domain names can be put into the static domain name resolution table, which can greatly improve the effect of domain name resolution.

Global Settings

On this page, the user can designate the switch as a DNS client to resolve DNS names to IP addresses through one or more configured DNS servers. It's enabled by default.

To configure DNS on the switch, navigate to **Web UI -> IP -> DNS**, then click on the **Global Settings** tab.

DNS

Global Settings Domain Mapping Table

① DNS servers are sorted by the adding time from earliest to latest. The DNS server added the earliest has the highest priority.

DNS ☒

Domain Suffix 1-64 alphanumeric characters and special characters Add +

DNS Server - Add +

- Add +

DNS Global Settings

Up to 8 Domain Suffixes and 8 DNS Servers can be added. To add a Domain Suffix or DNS Server click on "+" icon and to delete click on "-" icon.

DNS servers are sorted from far to near according to the adding time, and the earliest added servers have the highest priority.

Domain Mapping Table

To add a static DNS or to view the Dynamic ones, click on the **Domain Mapping Table** tab.

DNS

Global Settings

Domain Mapping Table

Add

Refresh

Add as Static Domain

Delete

☐	Hostname	IP Address	Type	Expiration (s)	Operation
☐	grandstream.com	173.254.235.74	Static	--	 
☐	pool.ntp.org	196.200.131.160	Dynamic	16	

Total 2

<

1

>

10 / page

DNS Domain Mapping Table

Click on "Add" button to add a new static DNS entry.

Add Static Domain



*Hostname

1-191 alphanumeric characters and special characters . _ -

grandstream.com

*IP Address

173.254.235.74

Cancel

OK

Add Static Domain

Up to 32 static domain names can be added.

The user can also select the dynamic domains and then click on "Add as a static domain" button or icon to make them as static ones.

MULTICAST

IP multicast is a technique for one-to-many communication over an IP infrastructure in a network. To avoid the incoming data broadcasting to all GE/LAG ports, multicast is useful to transfer the data/message to specified GE/LAG ports for IGMP snooping or MLD Snooping. When the Switch receives a message "subscribed" by the client, it must decide to transfer the data to specified GE/LAG ports according to the location of the client (subscribed member).

IGMP Snooping

As an IPv4 Layer 2 multicast protocol, IGMP snooping is the process of listening to Internet Group Management Protocol (IGMP) network traffic. The feature allows a network switch to listen in on the IGMP

conversation between hosts and routers. By listening to these conversations the switch maintains a map of which links need which IP multicast streams. Multicasts may be filtered from the links which do not need them and thus controls which ports receive specific multicast traffic.

IGMP Snooping Global Settings

Under **IGMP Snooping -> Global VLAN Settings**, **Add**, **Edit**, and **Delete** are separate table actions for managing VLAN-specific snooping settings.

This page allows the user to enable/disable IGMP Snooping function, select snooping version, and enable/disable snooping report suppression also select the Multicast Forward Mode and what to do with Unknown Multicast Packet.

Unknown Multicast Packet: This option is associated with the same one MLD Snooping. Whatever option selected here will be the same as MLD Snooping and vice versa.

IGMP Snooping

Global Settings

Router Port

Multicast Address

Multicast Policy

Multicast Port

Unknown Multicast Packet

Flood

This option is associated with the same setting under MLD Snooping

IGMP Snooping

Multicast Forward Mode

MAC-Based

IGMP Version

IGMPv2

Report Suppression

Cancel

OK

VLAN Settings

Edit

All

Q VLAN

☒	VLAN	Status	Querier	Querier Version	Router Port Auto-Learning	Port Fast Leave	Query Robustness	Query Interval	Operation
☒	1	Disabled	Disabled	IGMPv2	Enabled	Disabled	2	125	
☒	7	Disabled	Disabled	IGMPv2	Enabled	Disabled	2	125	

IGMP Snooping Global Settings

Unknown Multicast Packet	Select an action for switch to handle with unknown multicast packet. Drop: Drop the unknown multicast data. Flood: Flood the unknown multicast data. Forward to Router port: Forward the unknown multicast data to router port.
IGMP Snooping	Enable or disable Global IGMP Snooping
Multicast Forward Mode	Set the Multicast Forward Mode. MAC-Based: Forward using MAC address. IP-Based: Forward using IP address
IGMP Version	Select the IGMP Version.
Report Suppression	Enable or disable the switch to handle IGMP reports between router and host, suppressing bandwidth used by IGMP.

IGMP Snooping Global Settings

The user can also Enable/Disable IGMP Snooping and IGMP Snooping Querier per VLAN and much more.

VLAN	1	
IGMP Snooping	☒	
IGMP Snooping Querier	☐	
Router Port Auto-Learning	☒	
Port Fast Leave	☐	
*Query Robustness	2	Valid range is 1-7.
*Query Interval (s)	125	Valid range is 30-18000.
*Query Max Response Interval (s)	10	Valid range is 5-20.
*Last Member Query Count	2	Valid range is 1-7.
*Last Member Query Interval (s)	1	Valid range is 1-25.
Cancel <input checked="" type="button" value="OK"/>		

IGMP Snooping Edit VLAN

VLAN	Displays the selected VLAN
MLD Snooping	Click on the toggle button to enable MLD Snooping for the selected VLAN.
MLD Snooping Querier	Click the toggle button to enable the MLD Snooping Querier.
MLD Snooping Querier Version	Select from the drop-down list the MLD Snooping Querier Version.
Router Port Auto-Learning	Click on the toggle button to learn router port by MLD query.
Port Fast Leave	Select Enable/Disable Fast Leave feature for the desired port.Note: If Fast Leave is enabled for a port, the switch will immediately remove this port from the multicast group upon receiving MLD leave messages.
Query Robustness	Set a number which allows tuning for the expected packet loss on a subnet.The valid range is 1-7
Query Interval (s)	Set the interval of querier send general query.
Query Max Response Interval (s)	It specifies the maximum allowed time before sending a responding report.Note: The valid range is 5-20 in seconds.
Last Member Query Count	After querying for specified times and still not receiving any response from the subscribed member, GWN7806(P) series switches will stop transmitting data to the related GE port(s).Note: The valid range is 1-7
Last Member Query Interval (s)	Set The maximum time interval between counting each member query message with no responses from any subscribed member.Note: The valid range is 1-25 in seconds

IGMP Snooping Edit VLAN

IGMP Snooping Router Port

This page shows the IGMP querier router known to this switch. Click on "Add" to add another one or Click on "Edit" icon to modify already created one.

IGMP Snooping

Global Settings Querier Router Port Multicast Address Multicast Policy Multicast Port

AddRefreshDelete

☐ VLAN	Static Router Port	Forbidden Port	Dynamic Port	Aging Time (s)	Operation
☐ 1	1/0/24	--	--	--	

Total 1<1>10 / page

IGMP Snooping Router Port

Router Port > Edit

*VLAN8

Static Router Port

Click on port to select/unselect

GE

2468

135712

LAG

2468

1357

Forbidden Port

Click on port to select/unselect

GE

2468

135712

Cancel

OK

IGMP Snooping Router Port add or edit

IGMP Snooping Multicast Address

Dynamic multicast addresses will be listed here and the user can also add static multicast address entries based on VLAN by clicking on "Add" button or click "Edit" icon to edit.

IGMP Snooping

Global SettingsQuerierRouter PortMulticast AddressMulticast PolicyMulticast Port

AddRefreshDelete

Q VLAN/Multicast Address/Member Port

☐ VLAN	Multicast Address	Source IP Address	Member Port	Address Type	Aging Time (s)	Operation
-------------------------------	-------------------	-------------------	-------------	--------------	----------------	-----------

IGMP Snooping Multicast Address page

Multicast Address > Edit

VLAN

Multicast Address

224.7.1.0

IPv4 format

Click on port to select/unselect

Port

24681012141618202224

135791113151719212325SFP+26SFP+27SFP+28SFP+

LAG

2468101214

135791113


Cancel

OK

Add IGMP Snooping Multicast Address

IGMP Snooping Multicast Policy


In this page, the user can add a Multicast Policy up to 128 Policy ID to Allow or Reject a range of Multicast Addresses.

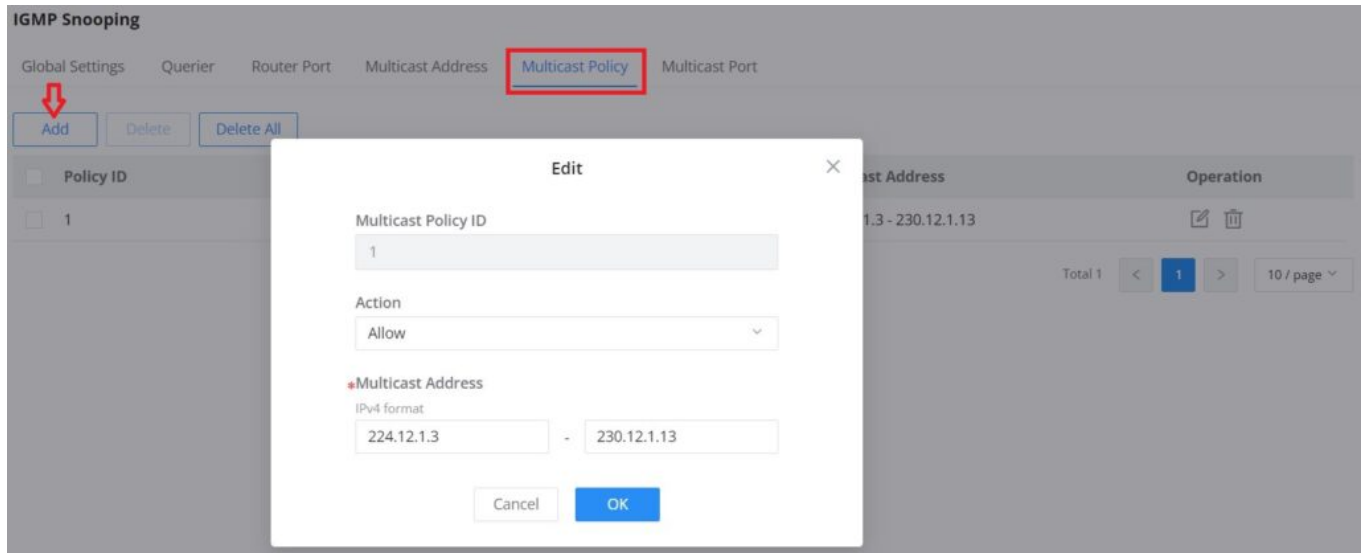

IGMP Snooping Multicast Policy

IGMP Snooping Multicast Port

Once the Multicast Policy is created, the user is able to apply this policy on a port.

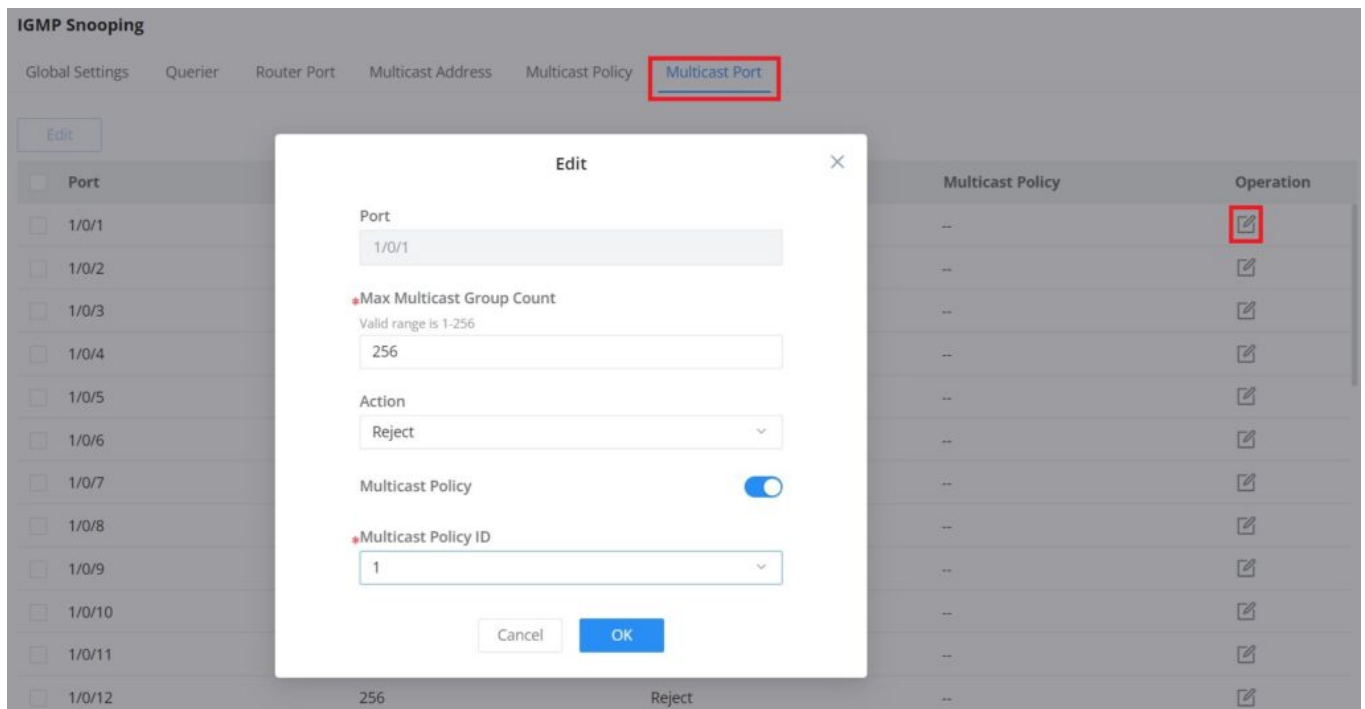

IGMP Snooping Multicast Port

MLD Snooping

Field or action	Description
Global VLAN Settings	Use the separate Add, Edit, and Delete actions to manage VLAN-specific settings.
Multicast Address actions	Use Add, Refresh, and Delete.
Search	Use VLAN/Multicast Address/Member Port to filter the list.
Columns	The list shows VLAN, multicast address, source IP address, member port, address type, aging time, and operation.

MLD Snooping list controls

MLD Snooping Global Settings

As an IPv6 Layer 2 multicast protocol, MLD Snooping maintains the outgoing port information of multicast packets by listening to the multicast protocol packets sent between Layer 3 multicast devices and user hosts, so as to manage and control multicast data . Forwarding of packets at the data link layer. When an MLD protocol packet transmitted between a host and an upstream Layer 3 device passes through a Layer 2 device, MLD Snooping analyzes the information carried in the packet, establishes and maintains a Layer 2 multicast forwarding table based on the information, and guides multicast data in the data stream.

Global Settings page give the user the ability to enable MLD Snooping as well as selecting Multicast Forward Mode etc.

Save

Q

admin

MLD Snooping

Global SettingsRouter PortMulticast AddressMulticast PolicyMulticast Port

Unknown Multicast Packet

Flood

This option is associated with the same one IGMP Snooping.

MLD Snooping

Multicast Forward Mode

MAC-Based

MLD Version

MLDv1

Report Suppression

Cancel

Save

VLAN Settings

Edit

All

Q VLAN

☐	VLAN	Status	Querier	Querier Version	Router Port Auto-Learning	Port Fast Leave	Query Robustness	Operation
☐	1	• Disabled	• Disabled	MLDv2	• Enabled	• Disabled	2	

MLD Snooping Global Settings

Unknown Multicast Packet	Select an action for switch to handle with unknown multicast packet. Drop: Drop the unknown multicast data. Flood: Flood the unknown multicast data. Forward to Router port: Forward the unknown multicast data to router port. Note: This option is associated with the same one IGMP Snooping.
MLD Snooping	Enable or disable Global MLD Snooping
Multicast Forward Mode	Set the Multicast Forward Mode. MAC-Based: Forward using MAC address. IP-Based: Forward using IP address
MLD Version	Select the MLD Version.
Report Suppression	Enable or disable the switch to handle MLD reports between router and host, suppressing bandwidth used by MLD.

MLD Snooping Global Settings

Once Global MLD Snooping is enabled, then the user can enable more settings per VLAN.

VLAN	1	
MLD Snooping	☒	
MLD Snooping Querier	☒	
MLD Snooping Querier Version	MLDv2	
Router Port Auto-Learning	☒	
Port Fast Leave	☒	
*Query Robustness	2	☒ The range is 1-7.
*Query Interval (s)	125	☒ The range is 30-18000.
*Query Max Response Interval (s)	10	☒ The range is 5-20.
*Last Member Query Count	2	☒ The range is 1-7.
*Last Member Query Interval (s)	1	☒ The range is 1-25.
Cancel Save		

MLD Snooping Edit VLAN

VLAN	Displays the selected VLAN
MLD Snooping	Click on the toggle button to enable MLD Snooping for the selected VLAN.
MLD Snooping Querier	Click the toggle button to enable the MLD Snooping Querier.
MLD Snooping Querier Version	Select from the drop-down list the MLD Snooping Querier Version.
Router Port Auto-Learning	Click on the toggle button to learn router port by MLD query.
Port Fast Leave	Select Enable/Disable Fast Leave feature for the desired port. Note: If Fast Leave is enabled for a port, the switch will immediately remove this port from the multicast group upon receiving MLD leave messages.
Query Robustness	Set a number which allows tuning for the expected packet loss on a subnet. The valid range is 1-7
Query Interval (s)	Set the interval of querier send general query.
Query Max Response Interval (s)	It specifies the maximum allowed time before sending a responding report. Note: The valid range is 5-20 in seconds.
Last Member Query Count	After querying for specified times and still not receiving any response from the subscribed member, the switch will stop transmitting data to the related GE port(s). Note: The valid range is 1-7
Last Member Query Interval (s)	Set The maximum time interval between counting each member query message with no responses from any subscribed member. Note: The valid range is 1-25 in seconds

MLD Snooping - Edit VLAN

MLD Snooping Router Port

If the router port is statically configured, the Layer 2 device will also forward the MLD report and leave

message to the static router port. If a static member port is configured, the interface will be added as the outgoing interface in the forwarding table. After a Layer 2 multicast forwarding table entry is established on a Layer 2 device, when the Layer 2 device receives a multicast data packet, it searches for the forwarding table according to the VLAN to which the packet belongs and the destination address of the packet (that is, the IPv6 multicast group address). Whether the item has the corresponding "outbound interface information". If it exists, the packet is sent to all multicast group member ports; if it does not exist, the packet is discarded or broadcast in the VLAN.

MLD Snooping

Global SettingsQuerierRouter PortMulticast AddressMulticast PolicyMulticast Port

AddRefreshDelete

☐ VLAN	Static Router Port	Forbidden Port	Dynamic Port	Aging Time (s)	Operation
☐ 1	1/0/1	--	--	--	

Total 1

<1>

10 / page

MLD Snooping Router Port page

Router Port > Edit

VLAN

1

Static Router Port

Click on port to select/unselect

Port

24

1018202224

13

911131517192123

25262728

SFP+SFP+SFP+SFP+

468

121416

357

111315

192123

SFP+SFP+SFP+SFP+

24

10121416

13

9111315

17192123

25262728

SFP+SFP+SFP+SFP+

24

10121416

357

111315

17192123

25262728

SFP+SFP+SFP+SFP+

LAG

24

101214

13

91113

468

121416

357

111315

Forbidden Port

Click on port to select/unselect

Port

24

1018202224

13

911131517192123

25262728

SFP+SFP+SFP+SFP+

468

121416

357

111315

17192123

SFP+SFP+SFP+SFP+

24

10121416

13

9111315

17192123

25262728

SFP+SFP+SFP+SFP+

24

10121416

13

9111315

17192123

25262728

SFP+SFP+SFP+SFP+

Cancel

OK

Add MLD Snooping Router Port

MLD Snooping Multicast Address

The switches also support adding static multicast addresses by specifying the VLAN and member port.

MLD Snooping

[Global Settings](#) [Querier](#) [Router Port](#) [Multicast Address](#) [Multicast Policy](#) [Multicast Port](#)

↓

Add

Refresh

Delete

Q

VLAN/Multicast Address/Member Port

☐	VLAN ↕	Multicast Address	Source IP Address	Member Port	Address Type	Aging Time (s)	Operation
							

MLD Snooping Multicast Address page

Multicast Address > Edit

*VLAN

*Multicast Address

FF02:0:0:0:1:FFF:FFFF

IPv6 format

Click on port to select/unselect

Port

1 SFP+

2 SFP+

3 SFP+

4 SFP+

5 SFP+

6 SFP+

7 SFP+

8 SFP+

9 SFP+

10 SFP+

11 SFP+

12 SFP+

LAG

1

2

3

4

5

6


Cancel

OK

Add MLD Snooping Multicast Address

MLD Snooping Multicast Policy


Multicast Policy can be created in this page to allow or reject a range of IPv6 Multicast Addresses. Up to 128 Policy can be created.

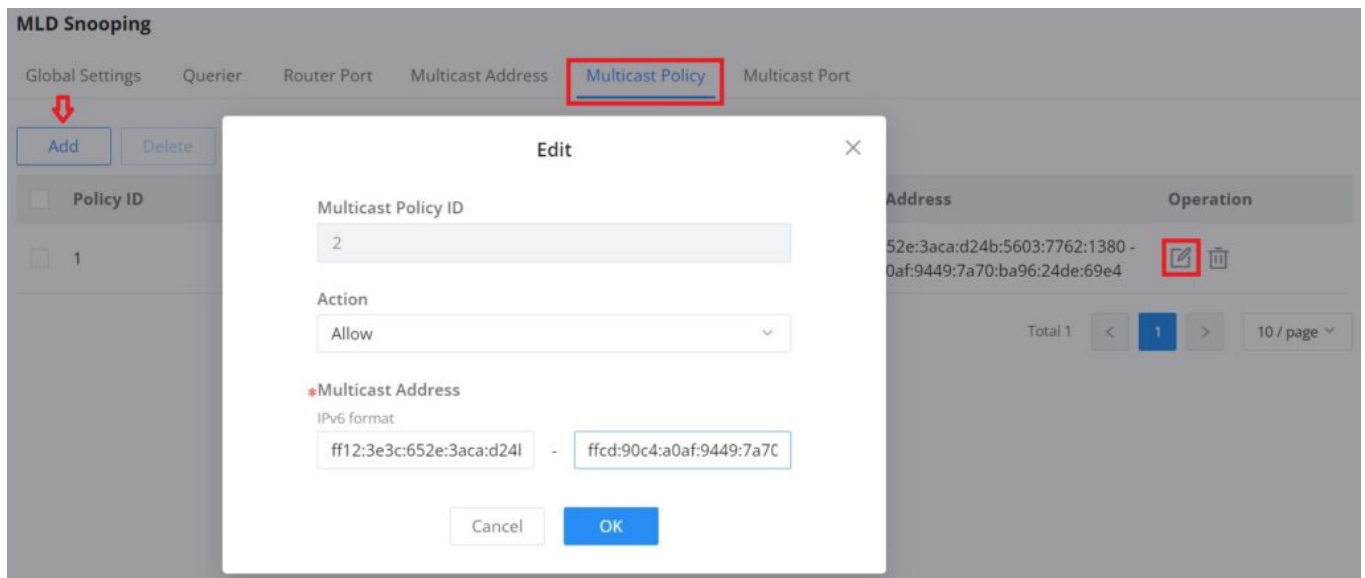

MLD Snooping Multicast Policy

MLD Snooping Multicast Port

The multicast policy can be applied to the Gigabit Ethernet/LAG port, the user can also set the maximum number of multicast groups that the port is allowed to join and set the action when the port multicast exceeds the limit, the default is rejected.

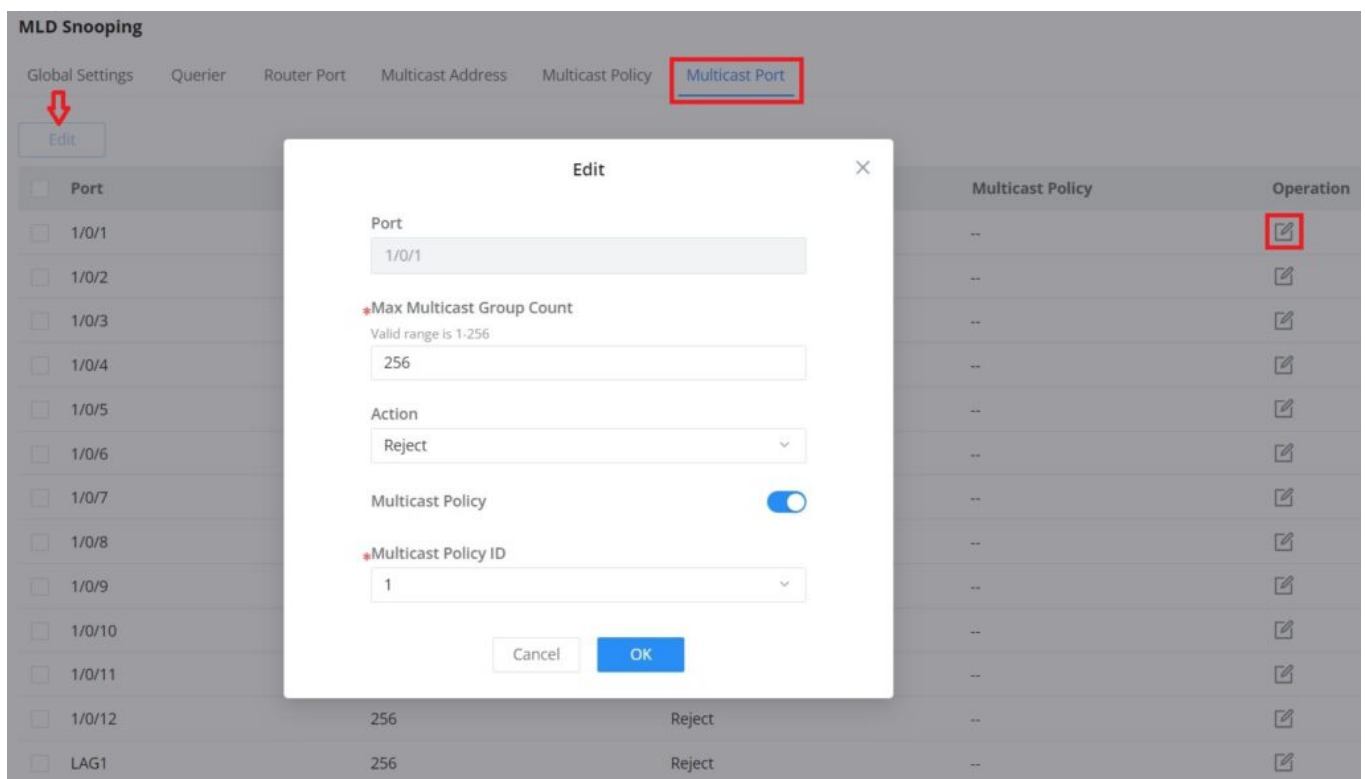

MLD Snooping Multicast Port

ROUTING

Routing is a process in which the router selects the optimal path according to the destination address of the received data packet and forwards it to the next network node leading to the target network, and the last routing node under this path forwards the data to the target host. (Router refers to both a router in the traditional sense and an Ethernet switch running a routing protocol).

The switches support IPv4 and IPv6 static routing.


Dynamic routing protocols, such as RIP, RIPng, OSPF, OSPFv3, BGP, and Route Policy, are supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

Routing Table

A routing table is like a map of the network that shows the best routes to each destination. It achieves this by storing information on how to reach different destinations on a network and with this table the router can decide where to forward packets that it receives from other devices.

To get to the Routing Table, please navigate to **Web UI -> Routing -> Routing Table**.

You can enable/disable Routing Forwarding option, which allows the switch to act as a Layer 3 device, enabling it to forward packets between different networks or VLANs based on the routing table entries.

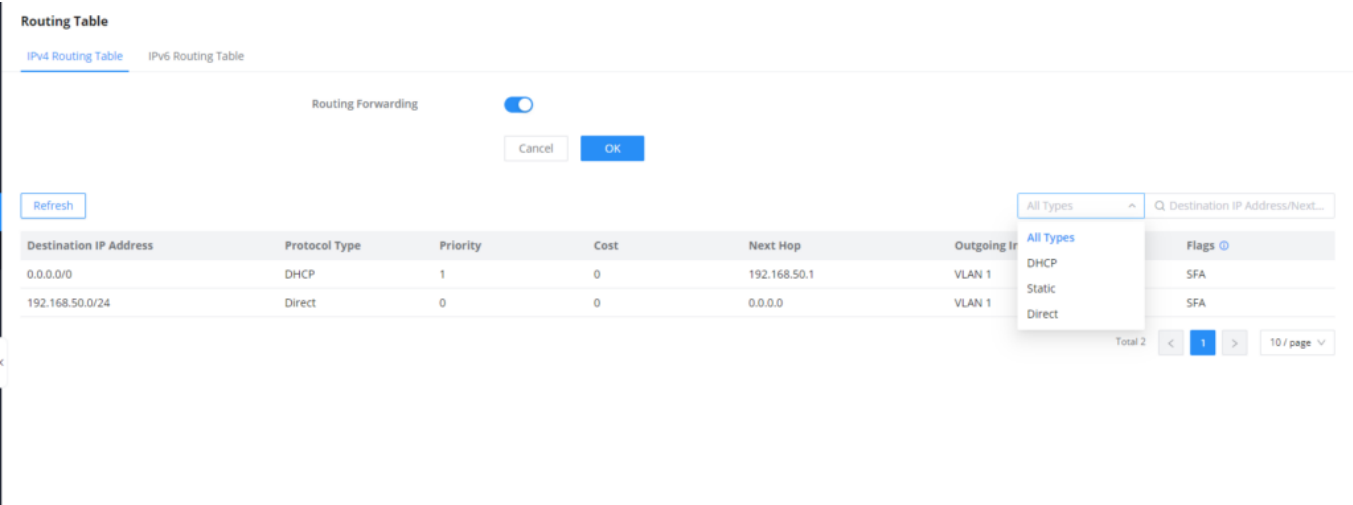

Routing Table

A routing table contains the following information for each entry: Destination IP address, Mask Length, Protocol Type, Priority, Next Hop, outgoing Interface and Flags.

A routing table gets populated over time with dynamic routing protocols like OSPF and RIP or static entries (manually configured by an administrator) or directly connected networks.

Static Routes

The static route is a special route that requires manual configuration by an administrator. Static routes have different purposes in different network environments:

- When the network structure is relatively simple, the network can work normally only by configuring static routes.
- In complex network environments, configuring static routes can improve network performance and ensure bandwidth for important applications, however, when the network fails or the topology changes, the static routes are not automatically updated and must be reconfigured manually.

To add a static route, please navigate to the **Web UI -> Routing -> Static Routes** page.

Static Routes

IPv4 Static Routes

IPv6 Static Routes

	Destination IP Address	Mask Length	Priority	Next Hop	Outgoing Interface	Operation
☒	192.168.7.0	24	2	--	VLAN 1	 
☐	192.168.7.0	24	1	192.168.8.0	--	 
☐	192.168.80.0	24	1	192.168.7.0	--	 

Static Routes

Click on "Add" button to add a new static route. then fill in the Destination IP Address with the mask length then select the next hop or the outgoing interface (VLAN) with specifying the priority.

Please refer to the figure below:

Add IPv4 Static Route

*Destination IP Address

*Mask Length

Valid range is 0-32.

Gateway

☐ Next Hop ☒ Outgoing Interface

*Outgoing Interface

*Priority

The valid range is 1-255. The smaller the value, the higher the priority.

Cancel

OK

Add static route

Routing Information Protocol (RIP)

The **Routing Information Protocol (RIP)** is a distance-vector routing protocol used for routing data in small to medium-sized networks. This guide will walk you through configuring RIP on the switch.

RIP is supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

RIP - Global Settings

To configure global RIP settings, navigate to **Routing -> RIP -> Global**.

1. **Enable RIP:** Toggle the switch to enable RIP.
2. **RIP Version:** Choose between **RIPv1** or **RIPv2**. RIPv2 is recommended for most modern networks.
3. **RIP Distance:** Set the administrative distance for RIP. The default is **120**.
4. **Timers:**
 - **Update Timer (s):** Sets the interval at which RIP updates are sent. The default is **30 seconds**.
 - **Aging Timer (s):** Determines how long a route remains valid before it is considered stale. The default is **180 seconds**.
 - **Garbage Collection Timer (s):** Defines the time to wait before deleting a stale route from the routing table. The default is **120 seconds**.
5. **External Route Import:** You can import routes from **Direct**, **Static**, and **OSPF** routes:
 - **Metric of Direct Route:** Assign a metric for direct routes.
 - **Metric of Static Route:** Assign a metric for static routes.
 - **Metric of OSPF Route:** Assign a metric for OSPF routes.

RIP

Global

Interface Settings

Route Advertisement

Neighbor Info

RIP Distance

120

Timer

*Update Timer (s)

30

Valid range is 5-65535

*Aging Timer (s)

180

Valid range is 5-65535

*Garbage Collection Timer (s)

120

Valid range is 5-65535

External Route Import

Route Type

☒ Direct ☒ Static ☒ OSPF

*Metric of Direct Route

1

Valid range is 1-16

*Metric of Static Route

1

Valid range is 1-16

*Metric of OSPF Route

1

Valid range is 1-16

Cancel

OK

Status

Routing Protocol is "rip"

Sending updates every 30 seconds with +/-50%, next due in 17 seconds

Timeout after 180 seconds, garbage collect after 120 seconds

redistribute statistics add 3 del 0

Outgoing update filter list for all interface is not set

Incoming update filter list for all interface is not set

Once you've made your configurations, click **OK** to apply the settings.

RIP - Interface Settings

To configure RIP on specific interfaces or VLANs, navigate to **Routing -> RIP -> Interface Settings**.

1. **Select the Interface:** You will see a list of VLANs or interfaces. Each interface shows its current status, IP address, RIP version, and other settings.

- To edit an interface, click on the **Edit** icon under the **Operation** column.

RIP

Global Interface Settings Route Advertisement Neighbor Info

[Edit](#)

☐	Interface	Status	Interface Address	RIP Tx Version	RIP Rx Version	RIPv2 Broadcast	Interface Suppression	Loop Protection	Authentication Type	Operation
☒	VLAN 1	Enabled	192.168.122.33/24	Default	Default	Disabled	Disabled	Split Horizon	Disabled	Edit
☐	VLAN 7	Enabled	192.168.7.1/24	Default	Default	Enabled	Enabled	Split Horizon	Disabled	Edit

Total 2 < 1 > 10 / page

RIP Interface Settings

2. **Edit Interface:** After clicking **Edit**, a new window will appear where you can configure the following settings:

- **RIP:** Toggle RIP on or off for this interface.
- **RIP Tx Version:** Select the version of RIP for outgoing messages (**RIPv1** or **RIPv2**).
- **RIP Rx Version:** Select the version of RIP for incoming messages.
- **RIPv2 Broadcast:** Enable or disable broadcast for RIPv2.
- **Interface Suppression:** Enable or disable suppression of specific interfaces.
- **Loop Protection:** Choose between **Split Horizon** (to prevent loops by not sending updates back on the interface where they were received) or **Poison Reverse** (to mark a route as unreachable).
- **Authentication Type:** Set authentication for RIP packets to either **Disabled**, **Simple** (password-based), or **MD5** (more secure).

Interface	VLAN 1
Interface Address	192.168.122.33/24
RIP	☒
RIP Tx Version	Default
RIP Rx Version	Default
RIPv2 Broadcast	☐
Interface Suppression	☐
Loop Protection	☒ Split Horizon ☐ Poison Reverse
Authentication Type	☒ Disabled ☐ Simple ☐ MD5
Cancel OK	

RIP Edit interface

After making changes, click **OK** to save the settings.

RIP - Route Advertisement

To configure route advertisements, go to **Routing -> RIP -> Route Advertisement**.

RIP

Global Interface Settings Route Advertisement Neighbor Info

Add

Delete

☒	Destination Address	Mask Length	Operation
☒	192.168.7.0	24	

Total 1

<

1

>

10 / page

RIP Route Advertisement

- Add a Route:** Click **Add** to enter a new route.
 - Destination Address:** Specify the destination network address that will be advertised.
 - Mask Length:** Set the subnet mask length for the destination network.
- Delete a Route:** To remove an advertised route, check the box next to the route and click **Delete**.

*Destination Address/Mask Length

192.168.7.0	/	24	—	Mask length range 1-32
192.168.3.0	/	24	—	

Add +

Cancel OK

RIP Add Route Advertisement

Click **OK** to apply the changes.

RIP - Neighbor Info

Navigate to **Routing -> RIP -> Neighbor Info** to view detailed information about neighboring devices that are participating in the RIP protocol. This section displays:

- **Interface:** The interface or VLAN participating in RIP.
- **Version:** The RIP version (RIPv1 or RIPv2).
- **Default Distance:** The default administrative distance for routes learned from neighbors.
- **Update Time:** The time of the last update from the neighbor.
- **Neighbor Address:** The IP address of the neighboring device.

RIP

Global

Interface Settings

Route Advertisement

Neighbor Info

Refresh

Interface	Version	Default Distance	Update Time	Neighbor Address
 No Data				

RIP Neighbor Info

If there are no RIP neighbors configured or detected, this section will display "No Data."

Routing Information Protocol Next Generation (RIPng)

Just like **RIP**, **RIPng (RIP Next Generation)** is a distance-vector routing protocol, but it's specifically designed for IPv6 networks. This section will guide you through configuring **RIPng** on the switch.

RIPng is supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

RIPng - Global Settings

To configure the global settings for RIPng, navigate to **Routing -> RIPng -> Global**.

1. **Enable RIPng:** Toggle the switch to enable RIPng.
2. **RIPng Distance:** Set the administrative distance for RIPng routes. The default is **120**.
3. **Timers:**

- **Update Timer (s)**: Sets the interval at which RIPng updates are sent. The default is **30 seconds**.
- **Aging Timer (s)**: Determines how long a route remains valid before it is considered stale. The default is **180 seconds**.
- **Garbage Collection Timer (s)**: The interval before deleting a stale route from the routing table. The default is **120 seconds**.

4. **External Route Import**: You can import routes from **Direct**, **Static**, and **OSPFv3** routes:

- **Metric of Direct Route**: Assign a metric for direct routes.
- **Metric of Static Route**: Assign a metric for static routes.
- **Metric of OSPFv3 Route**: Assign a metric for OSPFv3 routes.

RIPng

Global
Interface Settings
Route Advertisement
Neighbor Info

RIPng

RIPng Distance
120

Timer

Update Timer (s)
30
Valid range is 5-65535

Aging Timer (s)
180
Valid range is 5-65535

Garbage Collection Timer (s)
120
Valid range is 5-65535

External Route Import

Route Type

☒ Direct
☒ Static
☒ OSPFv3

Metric of Direct Route
1
Valid range is 1-16

Metric of Static Route
1
Valid range is 1-16

Metric of OSPFv3 Route
1
Valid range is 1-16

Cancel

OK

Status

Routing Protocol is "RIPng"
Sending updates every 30 seconds with +/-50%, next due in 10 seconds
Timeout after 180 seconds, garbage collect after 120 seconds

RIPng Global settings

After making these configurations, click **OK** to apply the settings.

RIPng - Interface Settings

To configure **RIPng** on specific interfaces or VLANs, navigate to **Routing -> RIPng -> Interface Settings**.

1. **Select the Interface**: You will see a list of VLANs or interfaces. Each interface shows its current status, interface address, and settings.

- To edit an interface, click the **Edit** icon under the **Operation** column.

RIPng

Global

Interface Settings

Route Advertisement

Neighbor Info

Edit

☒	Interface	Status	Interface Address	Interface Suppression	Loop Protection	Operation
☒	VLAN 1	Enabled	2408:8640:8fe:f3:ee74:d7ff:fe3d:90a4/64 fe80::ee74:d7ff:fe3d:90a4	Enabled	Split Horizon	
☐	VLAN 7	Disabled	--	Disabled	Split Horizon	

Total 2

<

1

>

10 / page

RIPng Interface Settings

1. **Edit Interface:** After clicking **Edit**, a new window will appear, allowing you to configure:

- **RIPng:** Toggle to enable RIPng on this interface.
- **Interface Suppression:** Enable or disable suppression of RIPng advertisements on the interface.
- **Loop Protection:** Select **Split Horizon** or **Poison Reverse**:
 - **Split Horizon:** Prevents a router from sending routing information back on the interface from which it was received. This is useful to prevent routing loops.
 - **Poison Reverse:** Marks a route as unreachable when it's learned from a neighbor, which helps eliminate loops.

Explanation: **Split Horizon** is a simple technique to prevent loops by not advertising a route back to the neighbor that originally sent it. **Poison Reverse** takes this further by actively marking routes from the same source as unreachable, providing more robust loop prevention.

Interface Settings > Edit Interface

Interface	VLAN 1
Interface Address	2408:8640:8fe:f3:ee74:d7ff:fe3d:90a4/64 fe80::ee74:d7ff:fe3d:90a4
RIPng	☒
Interface Suppression	☒
Loop Protection	☒ Split Horizon ☐ Poison Reverse
	Cancel OK

RIPng Edit interface

After making changes, click **OK** to save the settings.

RIPng - Route Advertisement

To configure route advertisements, go to **Routing -> RIPng -> Route Advertisement**.

RIPng

Global

Interface Settings

Route Advertisement

Neighbor Info

Add

Delete

☒	Destination IPv6 Address	Prefix Length	Operation
☒	2001:db8:abcd:12::	64	

Total 1

<

1

>

10 / page

RIPng Route Advertisement

1. **Add a Route:** Click **Add** to create a new route.
- **Destination IPv6 Address:** Specify the destination IPv6 network.
 - **Prefix Length:** Set the prefix length for the IPv6 network (e.g., /64).
2. **Delete a Route:** To remove an advertised route, check the box next to the route and click **Delete**.

Route Advertisement > **Add Route Advertisement**

*Destination IPv6 Address/Prefix

2001:db8:abcd:12::

/

64

Prefix range 1-128

Add

+

Cancel

OK

RIPng Add Route Advertisement

Click **OK** to apply the changes.

RIPng - Neighbor Info

Navigate to **Routing -> RIPng -> Neighbor Info** to view detailed information about neighboring devices participating in RIPng routing. This section displays:

- **Interface:** The interface or VLAN participating in RIPng.
- **Version:** The RIPng version.
- **Default Distance:** The administrative distance for routes learned from neighbors.
- **Update Time:** The time of the last update from the neighbor.
- **Neighbor Address:** The IPv6 address of the neighboring device.

If no RIPng neighbors are detected, this section will display "No Data."

RIPng

Global Interface Settings Route Advertisement Neighbor Info

Refresh

Interface	Version	Default Distance	Update Time	Neighbor Address
-----------	---------	------------------	-------------	------------------



No Data

RIPng Neighbor Info


OSPF (Open Shortest Path First)

OSPF stands for Open Shortest Path First, it's a routing protocol and uses a link state routing algorithm, in other words it collects information about the state of each link in the network to build an overall map about the whole network topology. OSPF is an interior gateway protocol (IGP) same as RIP (Routing Information Protocol), it's a protocol based on distance vector algorithms. OSPF has many advantages over other routing protocols, such as RIP.

Some Advantages of OSPF protocol:

- OSPF can perform route summarization, which reduces the size of the routing table and improves scalability.
- OSPF supports IPv4 and IPv6.
- OSPF can split the network into areas, which are logical groups of routers that share the same link state information. This reduces the amount of routing information that needs to be exchanged and processed by each router.
- OSPF can use authentication to secure the exchange of routing information between routers.
- OSPF can deal with variable length subnet masks (VLSM), which allows for more efficient use of IP addresses and network design.

In this example, we will be using two switches directly connected (neighbors) and a router serving as a DHCP server. Please refer to the figure below:

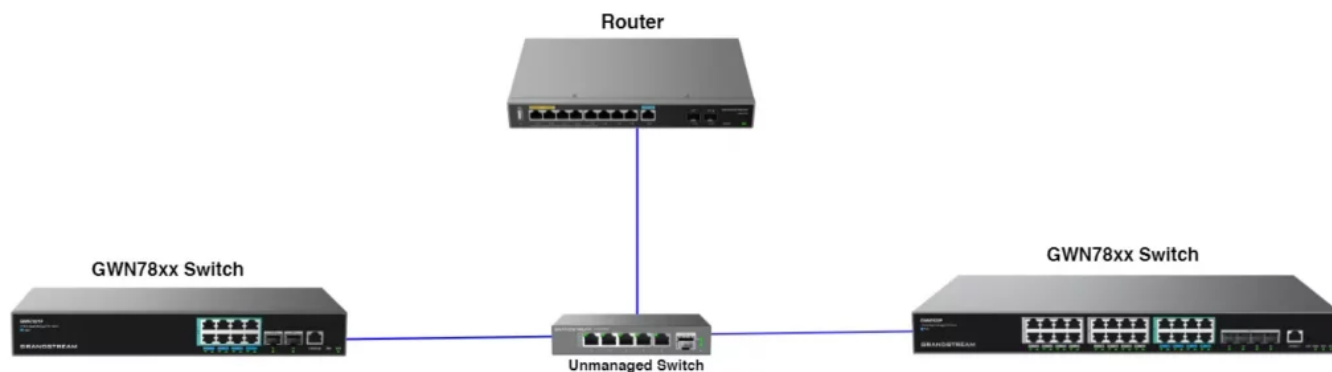

Example two switches

OSPF is supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

OSPF Global

To start using OSPF, please navigate to **Web UI -> Routing -> OSPF page -> Global tab:**

Toggle ON OSPF and enter the Router ID (it can be any IPv4 address) then scroll down to the bottom of the page and click the **"OK"** button, please refer to the figure below:

If adjacency relationship has been established, OSPF process needs to be rebooted for the router ID to take effect. Caution: this action will invalidate OSPF routing and result in recalculation. Please use with caution.

OSPF

Global

Area Settings

Interface Settings

NBMA Neighbor

Neighbor Info

Database Info

OSPF

*Router ID ⓘ

192.168.80.211

IPv4 format

Support RFC1583

Opaque LSA

Advertise Maximum Metric

Always Advertise Default Route

Route Metric ⓘ

SPF Timer

*Waiting Interval (ms)

0

Valid range is 0-600000

*Minimum Interval (ms)

50

Valid range is 0-600000

*Maximum Interval (ms)

5000

Valid range is 0-600000

LSA Parameters

*Transmission Delay (ms)

5000

Valid range is 0-5000

OSPF Global

OSPF Area Settings

The Area Settings tab allows you to configure different OSPF areas. An OSPF area is a logical grouping of routers that exchange OSPF information.

OSPF

Global	Area Settings	Interface Settings	NBMA Neighbor	Neighbor Info	Database Info
Area ID	Area Type	No Summary	Conversion Type	Operation	
0.0.0.0	None	Disabled	--		
2.2.2.2	Stub	Disabled	--		

OSPF Area Settings

To edit an Area Settings, click on the **"Edit"** button.

- **Area ID:** The unique identifier for the OSPF area. Area 0.0.0.0 is the backbone area and must be configured in every OSPF network.
- **Area Type:** Defines the type of the area. OSPF supports different area types, including:
 - **None:** A normal OSPF area that supports all OSPF features.
 - **Stub Area:** This does not allow external routes to be advertised into the area, reducing the size of the routing table.
 - **Not-So-Stubby Area (NSSA):** Allows limited external routes, typically from an ASBR (Autonomous System Boundary Router) within the area.
- **No Summary:** (only for Stub and NSSA) disables the summarization of routes, forcing the router to advertise specific routes rather than aggregated routes. This may be useful in certain network designs where precise routing information is required.

Area Settings > Edit Area

Area ID

2.2.2.2

Area Type



None



Stub



NSSA

Cancel

OK

OSPF Edit Area Settings

OSPF Interface Settings

On the Interface Settings tab, click on the **"Edit"** icon to enable the [VLAN IP Interface](#).

OSPF

Global Area Settings Interface Settings NBMA Neighbor Neighbor Info Database Info

Interface	Status	Interface Address	Area ID	Network Type	Interface Suppression	Ignore MTU Validation	LS In	Operation
VLAN 1	Enabled	192.168.80.211/24	0.0.0.0	Broadcast	Disabled	Disabled	5	 
VLAN 7	Enabled	70.0.0.1/24	0.0.0.0	Broadcast	Disabled	Disabled	5	 
VLAN 10	Enabled	10.0.0.1/8	0.0.0.0	Broadcast	Disabled	Disabled	5	 
VLAN 20	Enabled	20.0.0.1/24	0.0.0.0	Broadcast	Disabled	Disabled	5	 
VLAN 90	Enabled	90.0.0.1/24	0.0.0.0	Broadcast	Disabled	Disabled	5	 

OSPF Interface Settings

Toggle ON the OSPF on the selected interface then scroll down and click on the **"OK"** button.

Interface	VLAN 10
Interface Address	10.0.0.1/24
OSPF	☒
*Area ID	0.0.0.0 Must be in IPv4 format or within range 0 4294967295
Network Type	Broadcast
Interface Suppression	☐
Ignore MTU Validation	☐
*LSA Retransmission Interval (s)	5 Valid range is 3-65535
*LSA Transmission Delay (s)	1 Valid range is 1-500
Fast Hello	☐
*Hello Interval (s)	10 Valid range is 1-65535
*Neighbor Expiration Interval (s)	40 Valid range is 1-65535

OSPF Interface Settings Edit Interface

OSPF NBMA Neighbor

In Non-Broadcast Multi-Access (NBMA) networks, OSPF cannot automatically discover neighbors as it does in broadcast networks. Therefore, you must manually configure the neighbors.

- **Neighbor:** The IP address of the neighbor OSPF router that you want to manually add.
- **Hello Interval (s):** The time interval between sending hello packets to this neighbor.
- **Priority:** The priority assigned to the neighbor. This value influences the selection of the Designated Router (DR) and Backup Designated Router (BDR).
- **Interface Address:** The local IP address of the interface that will communicate with the neighbor.

Click on the **"Add"** button to add a neighbor.

OSPF

Global Area Settings Interface Settings **NBMA Neighbor** Neighbor Info Database Info

Add				
☐ Neighbor	Hello Interval (s)	Priority	Interface Address	Operation

OSPF Neighbor Info

Then specify the Neighbor IP address (IPv4 format).

*Neighbor	192.168.80.33	IPv4 format
*Hello Interval (s)	60	Valid range is 1-65535
*Priority	0	Valid range is 0-255
Cancel OK		

OSPF Neighbor Info Add neighbor

OSPF Neighbor Info

Please do the same steps on the second switch, then on the **Neighbor Info tab**, click on the "refresh" button for the adjacent (directly connected) switches to appear.

OSPF

Global Area Settings Interface Settings NBMA Neighbor Neighbor Info Database Info

Neighbor ID	Priority	Status	Dead Time	Neighbor Address	Interface Address	Up Time	Operation
192.168.80.116	1	Full/DR	39.660s	192.168.80.116	vlan1:192.168.80.211	0000:00:35:12	

OSPF Neighbor Info

Navigate to the Routing table **Web UI -> Routing -> Routing table** to confirm that the routing table contains routes to the previously created VLAN IP Interfaces on the other switch. Please refer to the figure below:

Routing Table

IPv4 Routing Table IPv6 Routing Table

All Types

Destination IP Address	Mask Length	Protocol Type	Priority	Next Hop	Outgoing Interface	Flags
0.0.0.0	0	DHCP	1	192.168.80.1	VLAN 1	SFA
192.168.80.0	24	Direct	0	0.0.0.0	VLAN 1	SFA
192.168.7.0	24	Static	1	0.0.0.0	VLAN 1	SFA
90.0.0.0	24	OSPF	110	192.168.80.211	VLAN 1	SFA
80.0.0.0	16	Static	1	0.0.0.0	VLAN 1	SFA
70.0.0.0	24	OSPF	110	192.168.80.211	VLAN 1	SFA
50.0.0.0	24	OSPF	110	192.168.80.211	VLAN 1	SFA
20.0.0.0	24	OSPF	110	192.168.80.211	VLAN 1	SFA
10.0.0.0	8	OSPF	110	192.168.80.211	VLAN 1	SFA

IPv4 Routing Table

OSPF Database Info

To check the **LSDB** (Link State DataBase), click on the **Database Info tab**, select the type (database) then click on the "Query" Button to see the Database info which is a list of all **LSA** (Link State Advertisements) that the OSPF routers use to get information about other routers running OSPF protocol and that is what

helps to populate the routing table for the best route to each destination.

OSPF

GlobalArea SettingsInterface SettingsNBMA NeighborNeighbor InfoDatabase Info

Type

Self-Originate

Database Info

OSPF Router with ID (192.168.80.211)

Router Link States (Area 0.0.0.0)

Link ID	ADV Router	Age	Seq#	CkSum	Link count
192.168.80.116	192.168.80.116	359	0x8000000b	0xf730	1
192.168.80.211	192.168.80.211	201	0x80000015	0x6275	5

Net Link States (Area 0.0.0.0)

Link ID	ADV Router	Age	Seq#	CkSum
192.168.80.211	192.168.80.211	360	0x80000003	0xa0e0

Summary Link States (Area 0.0.0.0)

Link ID	ADV Router	Age	Seq#	CkSum	Route
50.0.0.0	192.168.80.211	201	0x80000001	0x0e85	50.0.0.0/24
192.168.13.0	192.168.80.211	3	0x80000001	0x59f5	192.168.13.0/24

OSPF Database Info


OSPFv3

Building upon [OSPFv2](#), OSPFv3 (Open Shortest Path First Version 3) is specifically designed for IPv6 networks. While it shares many principles with OSPFv2, OSPFv3 introduces enhancements to accommodate IPv6 addressing and security features.

Key differences and advantages of OSPFv3 over OSPFv2:

- **IPv6 Support:** OSPFv3 is designed to support IPv6 natively, allowing for seamless integration into modern IPv6 networks.
- **Authentication:** OSPFv3 uses IPsec for authentication, providing enhanced security over OSPFv2, which uses built-in authentication methods like MD5.
- **Address Family Separation:** OSPFv3 separates the routing logic from the addressing, allowing for easier extension and support for multiple address families.
- **Link-State Advertisements (LSAs):** Introduces new LSAs to support IPv6 prefixes efficiently.

In this example, we will use two switches directly connected (neighbors) and a router serving as a DHCP server. Please refer to the figure below:

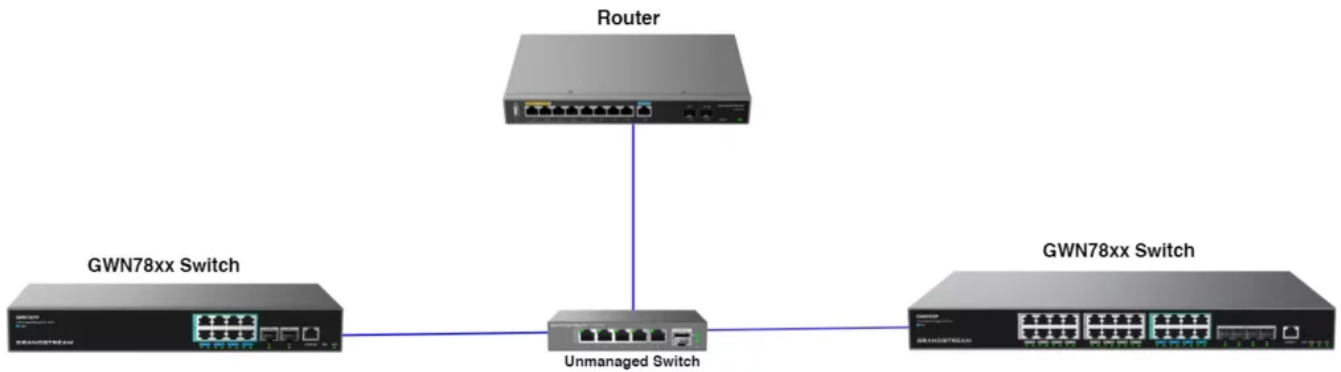

Example two switches

OSPFv3 is supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

To start using OSPFv3, please navigate to **Web UI -> Routing -> OSPFv3**:

OSPFv3 Global

Toggle ON OSPFv3 and enter the Router ID (it can be any IPv4 address). Configure the SPF calculation intervals and LSA parameters as needed. Click the "**OK**" button to save the settings. Refer to the figure below:

If an adjacency relationship has been established, the OSPFv3 process needs to be rebooted for the Router ID to take effect. Caution: this action will invalidate OSPFv3 routing and result in recalculation. Please use with caution.

OSPFv3

☒

*Router ID ⓘ

1.1.1.1

IPv4 format

Route Administrative Distance ⓘ

☐

SPF Calculation

*Waiting Interval (ms)

0

Valid range is 0-600000

*Minimum Interval (ms)

50

Valid range is 0-600000

*Maximum Interval (ms)

5000

Valid range is 0-600000

LSA Parameters

*Receive Time (ms)

1000

Valid range is 0-600000

External Route Import

Route Type

☒ Direct
 ☒ Static
 ☒ RIPng

Cancel

OK

Reboot OSPFv3

Status

OSPFv3 Routing Process (0) with Router-ID 1.1.1.1

Running 01:30:26

LSA minimum interval 1000 msec

OSPFv3 Global Configuration

OSPFv3 Area Settings

On the Area Settings tab, click the "Edit" icon to add and configure areas by specifying the Area ID and Area Type.

Area ID	Area Type	No Summary	Operation
0.0.0.0	None	Disabled	
1.1.1.1	None	Disabled	

Total 2

<

1

>

10 / page ▾

OSPFv3 Area Settings

OSPFv3 Interface Settings

In the Interface Settings tab, click the "Edit" icon to enable the [VLAN IP Interface](#).

Interface	Status	Interface Address	Area ID	Network Type	Interface Suppression	MTU	Ignore MTU Validity	Operation
VLAN 1	Enabled	fe80::c274:adff:fedf:cc94	1.1.1.1	Broadcast	Disabled	1500	Disabled	
VLAN 7	Enabled	fe80::c274:adff:fedf:cc94	0.0.0.0	Broadcast	Disabled	1500	Disabled	

Total 2 < 1 > 10 / page

OSPFv3 Interface Settings Edit Interface

Toggle ON OSPFv3 on the selected interface, then scroll down and click on the "OK" button.

Do the same steps on the second switch, then on the **Neighbor Info** tab, click on the "Refresh" button for the adjacent (directly connected) switches to appear.

Refresh

Neighbor ID	Priority	Status	Dead Time	Neighbor Address	Interface Address	Up Time	Operation

No Data

OSPFv3 Neighbor Info

OSPFv3 Database Info

To check the **LSDB** (Link State DataBase), click on the **Database Info** tab, select the type (database), then click on the "Query" Button to see the Database info, which is a list of all **LSAs** (Link State Advertisements) that the OSPFv3 routers use to get information about other routers running OSPFv3 protocol. This helps to populate the routing table for the best route to each destination.

Type

Self-Originate

database

database

router

network

inter-prefix

inter-router

as-external

group-membership

type-7

Database Info				
Area Scoped Link State Database (Area 1.1.1.1)				
Type	LSId	AdvRouter	Age	SeqNum
I/F Scoped Link State Database (I/F vlan7 in Area 0.0.0.0)				
Type	LSId	AdvRouter	Age	SeqNum
I/F Scoped Link State Database (I/F vlan1 in Area 1.1.1.1)				
Type	LSId	AdvRouter	Age	SeqNum
Lnk	0.0.0.3	1.1.1.1	1214	80000003
				fe80::c274:adff:fedf:cc94
AS Scoped Link State Database				
Type	LSId	AdvRouter	Age	SeqNum

BGP

Border Gateway Protocol (BGP) is a path-vector routing protocol used to exchange routing information between different networks, or **Autonomous Systems (AS)**, across the internet. BGP is known as the protocol that powers the internet because it manages how packets are routed across large-scale, complex networks. It allows organizations to route traffic efficiently and ensures that data reaches its destination by selecting the most appropriate path.

Key Features of BGP:

- **Scalability:** BGP is capable of managing vast networks by sharing routing information across different autonomous systems.
- **Policy-based Routing:** BGP allows administrators to define policies and rules to control how routing decisions are made.
- **Redundancy:** BGP can provide multiple routes to the same destination, ensuring high availability.

BGP operates between routers within an **Autonomous System (Internal BGP or IBGP)** and between routers across different Autonomous Systems (**External BGP or EBGP**). BGP routers exchange routing information, which is used to build the routing tables that direct traffic between networks.

BGP is supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

BGP - Global Settings

The **Global Settings** tab in BGP allows you to configure key parameters that control how the BGP process operates on the router. These settings include defining your **Autonomous System (AS) Number, Router ID**, and preferences for route selection and stability.

In the **Global Settings**, you can:

- Set your **AS Number (AS ID)**, which identifies your network in BGP routing.
- Specify the **Router ID**, a unique identifier for the BGP router.
- Configure **Local Preference** to control route selection within your Autonomous System.
- Enable **Route Dampening** to stabilize the routing table by reducing the impact of route flapping.

For further details on how to configure each of these fields, please refer to the figure and table below.

BGP

Global Settings

Peer Settings

Address Family Settings

Neighbor Info

BGP Route Info

Database Info

BGP

☒

*AS ID

65001

Valid range is 1-4294967295

*Router ID

10.0.0.1

IPv4 format

*Local Preference ⓘ

100

Valid range is 0-65535

Compare Router IDs

☒

Route Dampening

☒

*Half-life (Min)

15

Valid range is 1-45

*Reuse Threshold

750

Valid range is 1-20000

*Suppress Threshold

2000

Valid range is 1-20000

*Suppress Time (Min)

60

Valid range is 1-255

AS_Path Attributes

Ignore AS Path Attribute

☒

Check First AS

☒

Cancel

OK

BGP Global Settings

Field	Description	Example or Recommended Setting
BGP	Enables or disables BGP on the router.	Enabled
AS ID	Autonomous System (AS) number identifying your network.	Example: 65001
Router ID	Unique identifier for the router (typically an IP address).	Example: 10.0.0.1
Local Preference	Used to prefer one path over another within your AS. Higher values are preferred. If a BGP device obtains multiple routes with the same destination address but different next hops through different IBGP peers, the route with the higher local preference attribute value is preferred. Note: The local preference attribute is only valid between IBGP peers and is not advertised to other ASs.	Recommended: 100
Compare Router IDs	Compares router IDs when making routing decisions.	Enabled
Route Dampening	Stabilizes the network by reducing route flapping.	Enabled
Half-life (Min)	The time after which the penalty for route flapping is halved.	15 (default)
Reuse Threshold	The threshold at which a suppressed route can be reused.	750 (default)
Suppress Threshold	The penalty threshold at which a route is suppressed.	2000 (default)

Suppress Time (Min)	The time a route remains suppressed due to flapping.	60 (default)
AS_Path Attributes		
Ignore AS Path Attribute	Ignores the AS Path attribute when making routing decisions.	Enabled
Check First AS	Ensures BGP checks the first AS in the path for validation.	Enabled

BGP - Global Settings

BGP - Peer Settings

The **Peer Settings** tab allows you to configure peers for exchanging routing information with other BGP devices. These peers are critical for establishing communication between routers and sharing routing tables. Navigate to **Routing -> BGP -> Peer Settings**, select **IPv4 Peer** or **IPv6 Peer** depending on your network configuration, and click **Add** to configure a new peer. In this tab, you can add, edit, or remove peers. For detailed explanations of each field, refer to the figure and table below.

IPv4 Peer > Add IPv4 Peer

*IPv4 Address

192.168.1.2

IPv4 format

*AS ID

65002

Valid range is 1-4294967295

Interface

VLAN 1

Description

Peer with ISP Router 1

0-64 characters, including numbers, letters and special characters except "\/?:_

TTL Related

EBGP Maximum Hop

GTSM Hops

EBGP Maximum Hop

1

Valid range is 1-255

Message Suppression

Shutdown Session

Update Packet Timer (s)

Valid range is 0-600. 0 indicates disabled.

MD5

*Secret

1-64 characters, including numbers, letters and special characters except "\/?:_

Timer Settings

*Keepalive Interval (s)

60

Valid range is 1-21845

*Hold Interval (s)

180

Valid range is 3-65535

*Connect Retry Interval (s)

120

Valid range is 1-65535

Cancel

OK

BGP Add peer

Field	Description
IPv4 Address	Enter the IPv4 address of the BGP peer you are establishing a connection with. (Example: 192.168.1.2)
AS ID	Enter the Autonomous System (AS) number of the peer. This is a unique identifier for a group of networks under a single administration. (Example: 65002)

Interface	Select the interface (VLAN or Loopback) through which the BGP session will be established. (Example: VLAN 1)
Description	Optional field to describe the peer for identification purposes. (Example: Peer with ISP Router 1)
TTL Related	Select EBGP Maximum Hop for general EBGP connections or GTSM Hops for scenarios requiring security against certain types of attacks. (Default: EBGP Maximum Hop)
EBGP Maximum Hop	Set the maximum number of hops allowed for EBGP neighbors. (Valid range: 1-255) (Example: 1)
Message Suppression	When enabled, prevents BGP updates from being sent to the peer. Useful for maintenance scenarios. (Default: Disabled)
Shutdown Session	Enables or disables the BGP session. When enabled, no updates are exchanged with the peer. (Default: Disabled)
Update Packet Timer (s)	Configures the interval for sending BGP update packets in seconds. (Valid range: 0-600) (Default: Disabled)
MD5	Enable MD5 authentication for the peer. It is recommended for securing the BGP session.
Secret	The MD5 key used for authentication with the peer. (Example: a password or shared secret, 1-64 characters long)
Keepalive Interval (s)	Time interval in seconds for sending keepalive messages to ensure the peer is active. Note: If the keepalive interval is higher than the hold interval, the session will fail. (Valid range: 1-21845) (Default: 60)
Hold Interval (s)	Time interval in seconds before the BGP session is terminated if no keepalive or update message is received from the peer. (Valid range: 3-65535) (Default: 180)
Connect Retry Interval (s)	Time interval in seconds to wait before retrying a connection if the BGP session fails. (Valid range: 1-65535) (Default: 120)

BGP - Add peer

BGP - Address Family Settings

The **Address Family Settings** tab allows you to configure routing for different address families (IPv4 and IPv6). You can aggregate routes or import routes using various routing protocols (RIP, OSPF, etc.). These configurations determine how the switch handles route advertisements and ensures efficient network communication.

Navigate to **Routing -> BGP -> Address Family Settings**. In this tab, users can select between **IPv4 Unicast Routing** and **IPv6 Unicast Routing**. You can also configure **Route Aggregation** and **Import Route** options to optimize routing policies.

BGP

[Global Settings](#)
[Peer Settings](#)
[Address Family Settings](#)
[Neighbor Info](#)
[BGP Route Info](#)
[Database Info](#)

IPv4 Unicast Routing


IPv6 Unicast Routing

Route Aggregation

Import Route


Peer Address	Enable	Advertise All Paths	Advertise Best Path Per AS	Receive the Same AS Path as itself	Advertise Default Path	Set Nexthop as Local Address	Delete AS	Operation
No Data								

BGP Address Family Settings

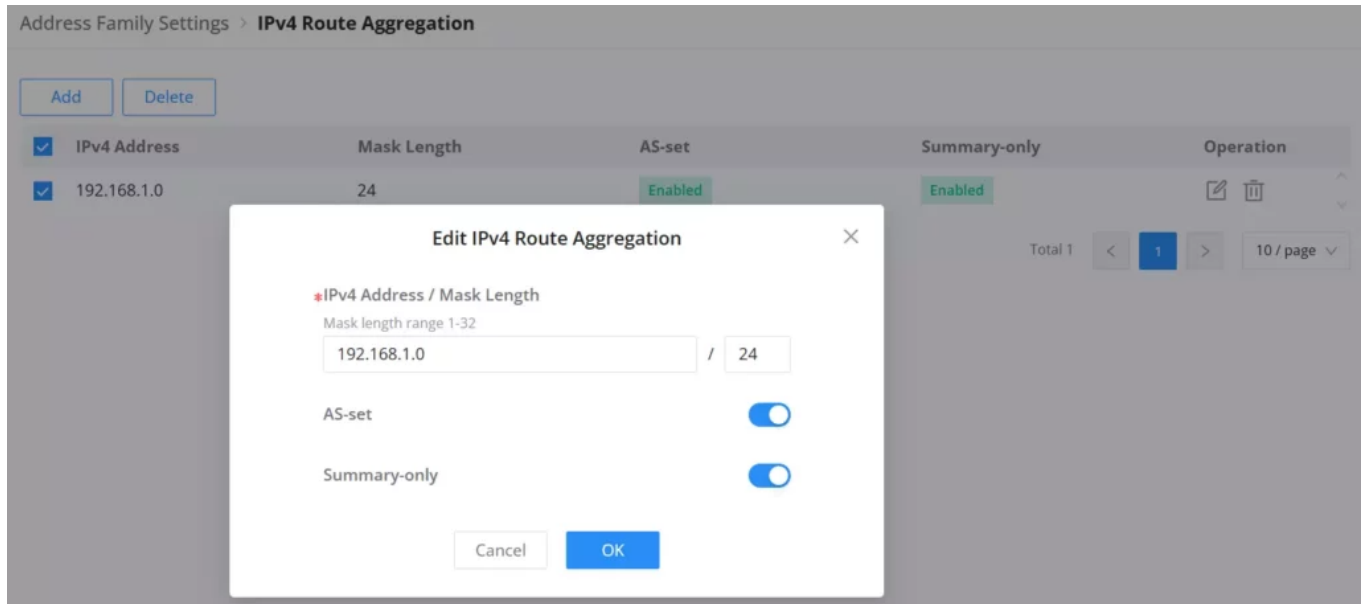

BGP Address Family Settings route aggregation

1. Click on **Route Aggregation**, then click **Add**.
2. Enter the following fields:
 - **IPv4 Address / Mask Length**: Specify the IPv4 address and subnet mask length for the route to be aggregated. For example, 192.168.1.0/24 where 24 represents the subnet mask.
 - **Explanation**: Route aggregation allows the BGP router to represent multiple smaller networks as a single larger network to other BGP peers. This reduces the size of routing tables.
 - **AS-set**: Toggle this option if you want to aggregate the AS numbers from the original routes.
 - **Explanation**: The **AS-set** option preserves the Autonomous Systems (AS) numbers from all the aggregated routes. This is helpful when you want to show all the AS paths through which the aggregated routes have passed.
 - **Summary-only**: Toggle this option to advertise only the summary route (without advertising the more specific routes).
 - **Explanation**: The **Summary-only** option ensures that only the aggregate route is advertised to the BGP peers, and the more specific routes are hidden. This helps simplify the routing information shared with other peers.
3. Click **OK** to confirm and add the route aggregation.

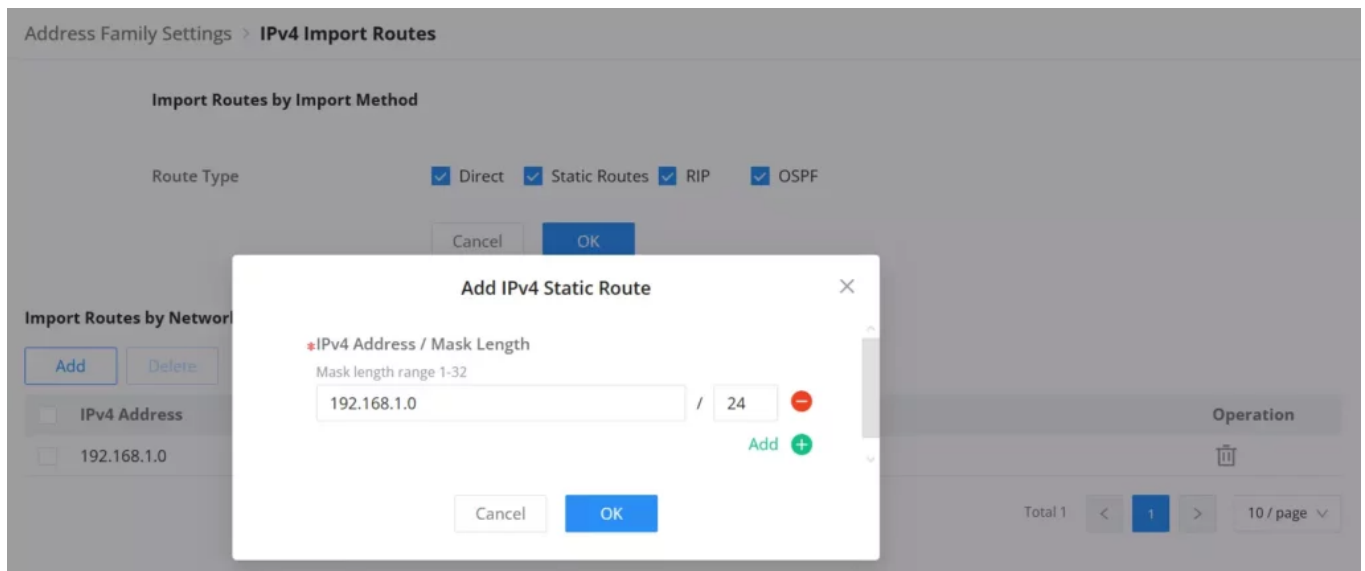

BGP Address Family Setting import routes

The **IPv4 Import Routes** section in the **Address Family Settings** allows you to import static routes, RIP, and OSPF routes into BGP. This is useful when you want to redistribute routes learned from other routing protocols or static routes into the BGP routing process.

To configure:

1. **Navigate to** Routing -> BGP -> Address Family Settings -> Import Route.
2. **Select** the route types you want to import (Direct, Static Routes, RIP, OSPF).
3. **Click on Add** to specify a new route to be imported.
4. **Enter the IPv4 Address / Mask Length** for the static route. Example: 192.168.1.0/24.
5. **Click OK** to confirm and import the route into BGP.

This ensures that the specified routes from other protocols are redistributed within the BGP routing domain.

BGP - Neighbor Info

The **Neighbor Info** tab in BGP provides details about established BGP peers and their status. You can view information such as the neighbor's IP address, BGP version, AS ID, received and sent messages, and the current state of communication between your device and its BGP peers.

To view BGP Neighbor Information:

1. **Navigate to** Routing -> BGP -> Neighbour Info.
2. **Select** either IPv4 or IPv6 Neighbor Info depending on the type of peer you have configured.
3. **Click Refresh** to update the list of BGP neighbors and view their details.

This section helps you monitor and troubleshoot BGP connections by showing real-time updates on message exchanges with BGP peers.

BGP

[Global Settings](#) [Peer Settings](#) [Address Family Settings](#) [Neighbor Info](#) [BGP Route Info](#) [Database Info](#)

IPv4 Neighbor Info

IPv6 Neighbor Info

Refresh

Neighbor IP	BGP Version	AS ID	Received Messages	Sent Messages	Messages to be sent	Received	Operation
 No Data							

BGP Neighbor info

BGP - Route Info

The **BGP Route Info** tab displays detailed information about the routes that the BGP process has learned and is using. This information includes the network addresses, next hop addresses, and various metrics used to determine the best path for routing traffic.

To view BGP route information:

1. **Navigate to** Routing -> BGP -> BGP Route Info.
2. **Select** either IPv4 or IPv6 BGP Route Info depending on your routing configuration.
3. **Click Refresh** to update and display the current routing table.

The table provides important details like:

- **Network:** The destination network address.
- **Next Hop:** The next-hop IP address for the route.
- **Metric:** A value that BGP uses to compare different paths.
- **Weight and Path:** These values help in determining the best available path for routing.

This tab is crucial for network administrators to monitor how routes are advertised, selected, and updated within the BGP environment.

BGP

[Global Settings](#)[Peer Settings](#)[Address Family Settings](#)[Neighbor Info](#)[BGP Route Info](#)[Database Info](#)[IPv4 BGP Route Info](#)[IPv6 BGP Route Info](#)[Refresh](#)

```
BGP table version is 3, local router ID is 10.0.0.1
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, r RIB-failure, S Stale, R Removed
Origin codes: i - IGP, e - EGP, ? - incomplete
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*>	0.0.0.0/0	192.168.122.1	0		32768	?
*>	192.168.1.0/24	0.0.0.0	0		32768	i
*>	192.168.122.0/24	0.0.0.0	0		32768	?

Displayed 3 routes and 3 total paths

BGP Route Info

BGP - Database Info

The **BGP Database Info** tab provides detailed statistics and information about BGP neighbors, routes, and various metrics associated with BGP's operation.

To view BGP Database Information:

1. **Navigate to** Routing -> BGP -> Database Info.
2. **Select a Type** from the drop-down menu. The options include:
 - **dampening-parameters:** View information about dampening parameters used in BGP.
 - **dampening-paths:** View the paths that are dampened.
 - **dampening-flap-statistics:** View flap statistics to monitor route stability.
 - **nexthop-detail:** Get details about the next hop.
 - **advertised-routes:** View the routes advertised to other neighbors.
 - **prefix-counts:** See a count of prefixes.
 - **flap-statistics:** Additional route stability statistics.
 - **detail:** General details about the selected IP address.
3. **Enter the IP Address** of the neighbor for which you want to see the database information.
4. **Click OK** to view the detailed information related to the selected type.

This tab is useful for in-depth BGP troubleshooting and monitoring, providing granular data on BGP operations and neighbors.

BGP

Global Settings Peer Settings Address Family Settings Neighbor Info BGP Route Info Database Info

Type

*IP Address

Database Info

% No such neighbor

detail

^

dampening-parameters

dampening-paths

dampening-flap-statistics

nexthop-detail

advertised-routes

prefix-counts

flap-statistics

detail

BGP Database Info

Route Policy

The **Route Policy** section is used to manage and apply filtering rules based on IPv4 and IPv6 Access Lists or Prefix Lists. BGP uses these rules to filter which routes are advertised or received from peers. This is essential for controlling routing behavior and ensuring only specific routes are allowed or denied according to network policies.

Route Policy is supported only on Layer 3 models, specifically the GWN781x, GWN782x, and GWN783x series.

Based on IPv4 Access List

The **IPv4 Access List** option allows users to create rules that filter routes by permitting specific routes based on the IPv4 address and mask length. These rules help to control which routes are advertised or received from BGP peers.

Example Configuration:

- **Name:** Allow-Routes-OfficeNetwork
- **Match Pattern:** **Allow** (permits the specified routes).
- **IPv4 Address/Mask Length:** 192.168.1.0/24

Route Policy

Based on IPv4 Access List Based on IPv6 Access List Based on IPv4 Prefix List Based on IPv6 Prefix List

Add IPv4 Access List ×

***Name**
1-64 characters, including letters and special characters except "*/;:_

Match Pattern

☒ Allow

***IPv4 Address / Mask Length**
Mask length range 0-32

/

Cancel

OK

BGP Based on IPv4 Access List

This configuration allows routes from the 192.168.1.0/24 network to be advertised or received by the BGP peer.

To configure:

1. Navigate to **Routing -> Route Policy -> Based on IPv4 Access List**.
2. Click **Add**.
3. Specify the rule name (e.g., **Allow-Routes-OfficeNetwork**).
4. Choose the **Allow** match pattern.
5. Enter the **IPv4 Address/Mask Length**.
6. Click **OK** to save.

Based on IPv6 Access List

The **Based on IPv6 Access List** section is used to create filtering rules that allow specific IPv6 routes to be advertised or received by BGP peers. This feature is useful for controlling the flow of IPv6 routing information in a network.

To configure an IPv6 Access List:

1. Navigate to **Routing -> Route Policy -> Based on IPv6 Access List**.
2. Click **Add**.
3. Enter a **Name** for the rule (e.g., **Allow-Routes-IPv6OfficeNetwork**).
4. Select the **Allow** match pattern (only available option).
5. Enter the **IPv6 Address/Prefix Length** for the routes you want to match.
6. Click **OK** to save the rule.

Route Policy

Based on IPv4 Access List
Based on IPv6 Access List
Based on IPv4 Prefix List
Based on IPv6 Prefix List

Add IPv6 Access List

*Name
1-64 characters, including letters and special characters except "\?/;:_

Allow-Routes-IPv6OfficeNetwork

Match Pattern

☒ Allow

*IPv6 Address/Prefix Length
Valid range of prefix length is 0-128

2001:db8::

/

64

Cancel

OK

BGP Based on IPv6 Access List

Example Configuration:

- **Name:** Allow-Routes-IPv6OfficeNetwork
- **Match Pattern:** Allow (this will permit routes that match the IPv6 address and prefix length).
- **IPv6 Address/Prefix Length:** 2001:db8::/64

This configuration allows routes from the **2001:db8::/64** network to be advertised or received by the BGP peer.

For more complex configurations, additional rules can be created similarly.

Based on IPv4 Prefix List

The **Based on IPv4 Prefix List** section allows you to create filtering rules for specific IPv4 prefixes that are either allowed or denied from being advertised or received by BGP peers. This gives you control over which prefixes are part of your BGP routing policies.

To configure an IPv4 Prefix List:

1. Navigate to **Routing -> Based on IPv4 Prefix List**.
2. Click **Add**.
3. Enter a **Name** for the rule (e.g., **Allow-Prefixes-OfficeNetwork**).
4. Assign a **Rule ID** (the smaller the ID, the higher its priority in matching).
5. Select the **Allow** match pattern.
6. Specify the **IPv4 Address Prefix** and the corresponding prefix length (e.g., **192.168.1.0/24**).
7. Click **OK** to save the rule.

Route Policy

Based on IPv4 Access List
Based on IPv6 Access List
Based on IPv4 Prefix List
Based on IPv6 Prefix List

Add IPv4 Prefix List

Name
1-64 characters, including letters and special characters except "\?/;,_

Allow-Prefixes-OfficeNetwork

Rule Settings

Rule ID
Valid range is 1-4294967295. The smaller ID is matched first.

1

Match Pattern

☒ Allow

IPv4 Address Prefix
Mask length range 0-32

192.168.1.0

/

24

Cancel

OK

received

BGP Based on IPv4 Prefix List

Example Configuration:

- **Name:** Allow-Prefixes-OfficeNetwork
- **Rule ID:** 1
- **Match Pattern:** Allow
- **IPv4 Address Prefix:** 192.168.1.0/24

This configuration allows prefixes from the **192.168.1.0/24** network to be advertised or received by the BGP peer.

Based on IPv6 Prefix List

The **Based on IPv6 Prefix List** section allows you to create filtering rules for specific IPv6 prefixes that are either allowed or denied from being advertised or received by BGP peers. This ensures that only certain IPv6 prefixes are part of your BGP routing policies.

To configure an IPv6 Prefix List:

1. Navigate to **Routing -> Route Policy -> Based on IPv6 Prefix List**.
2. Click **Add**.
3. Enter a **Name** for the rule (e.g., **Allow-Prefixes-IPv6Network**).
4. Assign a **Rule ID** (the smaller the ID, the higher its priority in matching).
5. Select the **Allow** match pattern.
6. Specify the **IPv6 Address Prefix** and the corresponding prefix length (e.g., **2001:db8::/64**).
7. Click **OK** to save the rule.

Route Policy

Based on IPv4 Access List
Based on IPv6 Access List
Based on IPv4 Prefix List
Based on IPv6 Prefix List

Add IPv6 Prefix List

*Name
1-64 characters, including letters and special characters except "\?/;:_
Allow-Prefixes-IPv6Network

Rule Settings

*Rule ID
Valid range is 1-4294967295. The smaller ID is matched first.
1

Match Pattern
☒ Allow

*IPv6 Address Prefix
Valid range of prefix length is 0-128
2001:db8:: / 64

Cancel OK

BGP Based on IPv6 Prefix List

Example Configuration:

- **Name:** Allow-Prefixes-IPv6Network
- **Rule ID:** 1
- **Match Pattern:** Allow
- **IPv6 Address Prefix:** 2001:db8::/64

This configuration allows prefixes from the **2001:db8::/64** network to be advertised or received by the BGP peer.

POE

Power Over Ethernet (PoE) refers to supplying power over an Ethernet network, also known as a local area network-based power supply system PoL or Active Ethernet.

Usually, the terminal devices of the access point need to use a DC power supply, but due to insufficient wiring, these devices need unified power management. At this time, the switch interface provides the power supply function, which can solve the above problems and realize the precise control of the port PoE power supply.

The PoE-capable models covered by this guide support PoE Mode A.

Global

This page Displays the Power Supply Info like the number of PoE, Total and Remaining PoE Power, etc, and even the Supply Voltage.

Global

Power Supply Info

Settings

Reboot

Power Supply

Built-in

In use

RPS

Unconnected

Global

Number of PoE Interfaces

24

Total PoE Power

360W

PoE Reserved Power

20W

Configured Power

0W

PoE Power Consumption

0.0mW

PoE Power Supply Support Type

802.3 af/at/bt(type3)

Field or action	Description
PoE Reserved Power (W)	Reserves part of the PoE budget so it is not allocated to powered devices. The accepted range is 0 to 359 W; the observed value was 20 W.

PoE global setting

PoE Global

Click on button to soft restart the PoE module function.

PoE Remaining power

PoE Remaining power(W): specify the total reserved power of the PoE power supply, the default is 20 W.

Global

Power Supply Info

Settings

*PoE Remaining Power (W)

20

Cancel

OK

PoE Global Settings

Application scenarios:

The device will dynamically allocate power to each interface according to the power consumed by each interface. During the running process of each PD device, its power consumption will continue to change, and the system will periodically calculate the total power required by all currently connected PDs. Whether the upper limit of the available PoE power is exceeded, if it exceeds, the system will automatically power off the PD device on the interface with lower priority to ensure the normal operation of other devices. However, sometimes there will be a sudden surge in power consumption, the remaining available power of the system cannot support this surge in demand, and the system has not yet had time to calculate the total power consumption exceeding the limit, to disconnect the power supply of the interface with lower priority. When the PoE power supply is overloaded, the overload protection will be powered off, and all PD devices will be powered off. Use the PoE power-reserved command to reasonably set the reserved power of the system. In the event of a sudden surge in power demand, the reserved power of the system can support the sudden demand and ensure that the system has time to power off the devices on the interfaces with low priority. method to ensure the stable operation of other equipment.

Interface PoE configuration

Select the switch interface that supports the PoE power supply to be configured. Multiple choices are possible.

Click on the "Edit" button or icon to change the configuration per port including Power Supply Standard, Power Mode, Power Limit Mode, and Power Supply Priority.

Interface

Edit

☐	Interface	Power Supply Standard	Power Mode	Power Supply Priority	Max Power Supply(W)	Power-Off Schedule	Current (mA)	Curre	Operation
☐	1/0/1	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/2	802.3bt	Auto	Low	30	None	90.0	4990.0	
☐	1/0/3	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/4	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/5	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/6	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/7	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/8	802.3bt	Auto	Low	60	None	0.0	0.0	
☐	1/0/9	802.3at	Auto	Low	30	None	0.0	0.0	
☐	1/0/10	802.3at	Auto	Low	30	None	0.0	0.0	

Interface	1/0/1
Power Supply Standard	802.3bt
Power Mode	Auto
Power Limit Mode	Class
Power Supply Priority	Low
Power-Off Schedule	None
Cancel OK	

PoE Interface edit port

QoS

The popularity of the network and the diversification of services have led to a surge in Internet traffic, resulting in network congestion, increased forwarding delay, and even packet loss in severe cases, resulting in reduced service quality or even unavailability. Therefore, to carry out these real-time services on the network, it is necessary to solve the problem of network congestion. The best way is to increase the bandwidth of the network, but considering the cost of operation and maintenance, this is not realistic. The most effective solution is to apply a "Guaranteed" policies govern network traffic. QoS technology is developed under this background. QoS is quality of service, and its purpose is to provide end-to-end service quality assurance for various business needs. QoS is a tool for effectively utilizing network resources. It allows different traffic flows to compete for network resources unequally. Voice, video, and important data applications can be prioritized in network equipment.

Port Priority

On this page, the user can enable/disable port priority for each interface (port/LAG), supported modes are (CoS, DSCP, CoS-DSCP, or IP-Precedence).

Please navigate to **Web UI -> QoS -> Port Priority** page.

Port Priority

Edit

☐	Port	Trust Mode	CoS	Remarking CoS	Remarking DSCP	Remarking IP Precedence	Operation
☐	1/0/1	802.1p	6	Enabled	Disabled	Disabled	
☒	1/0/2	None	0	Disabled	Disabled	Disabled	
☒	1/0/3	None	0	Disabled	Disabled	Disabled	
☒	1/0/4	None	0	Disabled	Disabled	Disabled	
☐	1/0/5	None	0	Disabled	Disabled	Disabled	

QoS Port Priority

Then the user can click on the **"Edit"** button for further configuration per Port/LAG.

Edit Port Priority

Port

1/0/1

Trust Mode

802.1p

*CoS

Valid range is 0-7.

6

Remarking CoS



Remarking DSCP



Remarking IP Precedence



Only either Rewrite DSCP or Rewrite IP Precedence can be selected.
Both cannot be selected at the same time.

Cancel

OK

Edit Port Priority

Port	Displays the selected port GE/LAG.
Trust Mode	Select the QoS operation mode: None: no packet priority is trusted, and the interface default priority is used. CoS: Traffic is mapped to queues based on the CoS Queue Mapping, it can configured in QoS -> Priority Mapping -> CoS Mapping page. DSCP: All IP traffic is mapped to queues based on the DSCP field in the IP header. If the traffic is not IP traffic, it is mapped to the lowest priority queue. CoS-DSCP: All IP traffic is mapped to queues based on the DSCP field in the IP header. If the traffic is not IP traffic but has VLAN tag, mapped to queues based on the CoS value in the VLAN tag. it can configured in QoS -> Priority Mapping -> DSCP Mapping page. IP-Precedence: The IP precedence is a 3-bit field in TOS that threats high priority packets as more important than other packets. it can configured in QoS -> Priority Mapping -> IP Mapping page.
CoS	Set the CoS value of the interface, the value range is an integer from 0 to 7 (7 is the highest priority), the default is 0.
Remarking CoS	Set whether to enable Remarking CoS function of outgoing packets, which is disabled by default.
Remarking DSCP	Set whether to enable Remarking DSCP function of outgoing packets, and it is disabled by default.
Re-marking IP Precedence	Set whether to enable Remarking IP Precedence function of outgoing packets, and it is disabled by default.Note : Only one of DSCP and IP Precedence re-marking can be enabled.

Priority Mapping

Priority mapping is used to realize the conversion between the QoS priority carried in the packet and the internal priority of the device (also known as the local priority, which is the priority used by the device to differentiate the service level of the packet) so that the device provides the Differentiated QoS service quality. Users can use different QoS priority fields in different networks according to network planning.

- CoS Mapping

Shows the mapping relationship between queues and CoS remarking priorities.

Priority Mapping

CoS Mapping

DSCP Mapping

IP Mapping

802.1p (CoS) - Queue Mapping

Reset

CoS	Queue
0	0
1	1
2	2
3	3
4	4
5	5
6	6

Queue-CoS Remarking Mapping

Reset

Queue	CoS
0	0
1	1
2	2
3	3
4	4
5	5
6	6

Cancel

OK

CoS Mapping

- DSCP Mapping

Shows the mapping relationship between DSCP values and queue priorities.

Priority Mapping

CoS Mapping [DSCP Mapping](#) IP Mapping

DSCP-Queue Mapping

[Reset](#)

DSCP	Queue	DSCP	Queue	DSCP	Queue	DSCP	Queue	DSCP	Queue	DSCP	Queue	DSCP	Queue	DSCP	Queue
0[CS0]	0	8[CS1]	1	16[CS2]	2	24[CS3]	3	32[CS4]	4	40[CS5]	5	48[CS6]	6	56[CS7]	7
1	0	9	1	17	2	25	3	33	4	41	5	49	6	57	7
2	0	10[AF11]	1	18[AF21]	2	26[AF31]	3	34[AF41]	4	42	5	50	6	58	7
3	0	11	1	19	2	27	3	35	4	43	5	51	6	59	7
4	0	12[AF12]	1	20[AF22]	2	28[AF32]	3	36[AF42]	4	44	5	52	6	60	7
5	0	13	1	21	2	29	3	37	4	45	5	53	6	61	7
6	0	14[AF13]	1	22[AF23]	2	30[AF33]	3	38[AF43]	4	46[EF]	5	54	6	62	7

[Cancel](#)

[OK](#)

DSCP Mapping

- IP Mapping

Shows the mapping relationship between IP priority and queue.

Priority Mapping

CoS Mapping [DSCP Mapping](#) [IP Mapping](#)

IP-Queue Mapping

[Reset](#)

IP	Queue
0	0
1	1
2	2
3	3
4	4
5	5
6	6

Queue-IP Remarking Mapping

[Reset](#)

Queue	IP
0	0
1	1
2	2
3	3
4	4
5	5
6	6

[Cancel](#)

[OK](#)

IP Mapping

Queue Scheduling

When congestion occurs in the network, the device will determine the processing order of forwarding packets according to the specified scheduling policy, so that high-priority packets are preferentially scheduled.

Queue scheduling algorithm: queue scheduling according to the switch interface.

- **Strict priority (SP, Strict Priority) scheduling:** The flow with the highest priority is served first, and the flow with the second highest priority is served until there is no flow at that priority. Each interface of the

switch supports 8 queues (queues 0-7), queue 7 is the highest priority queue, and queue 0 is the lowest priority queue. **Disadvantage:** When congestion occurs, if there are packets in the high-priority queue for a long time, the packets in the low-priority queue cannot be scheduled, and data cannot be transmitted.

- **Weighted Round Robin (WRR, Weighted Round Robin) scheduling:** each priority queue is allocated a certain bandwidth, and provides services for each priority queue according to the priority from high to low. When the high-priority queue has used up all the allocated bandwidth, it is automatically switched to the next priority queue to serve it.
- **Weighted Fair Queuing (WFQ):** Based on ensuring fairness (bandwidth, delay) as much as possible, priority considerations are added, so that high-priority packets have more opportunities for priority scheduling than low-priority packets. WFQ can automatically classify flows by their "session" information (protocol type, source and destination IP addresses, source, and destination TCP or UDP ports, priority bits in the ToS field, etc.) Place each flow evenly into different queues, thus balancing the latency of the individual flows as a whole. When dequeuing, WFQ allocates the bandwidth that each flow should occupy at the egress according to the flow priority (Precedence) . The smaller the priority value is, the less bandwidth is obtained; otherwise, the more bandwidth is obtained.
- **SP-WRR:** the switch schedules packets in the SP scheduling group preferentially, and when the SP scheduling group is empty, schedules the packets in the WRR scheduling group. Queues in the SP scheduling group are scheduled with the SP queue scheduling algorithm. Queues in the WRR scheduling group are scheduled with WRR.
- **SP-WFQ:** the switch schedules packets of queues in the WFQ group based on their minimum guaranteed bandwidth settings, then uses SP queuing to schedule the queues in the SP scheduling group, then uses WFQ to schedule the queues in the WFQ scheduling group in a round robin fashion according to their weights.

Queue Scheduling

Edit

☐	Port	Queuing Algorithm	Weight								Operation
			0	1	2	3	4	5	6	7	
☒	1/0/1	Weighted Fair Queuing(WFQ)	90	95	100	105	110	115	120	127	
☐	1/0/2	Weighted Round Robin (WRR)	1	20	30	50	70	90	100	127	
☐	1/0/3	SP-WFQ	0	30	40	55	77	99	111	127	
☐	1/0/4	SP-WRR	0	30	44	50	77	99	111	127	
☐	1/0/5	Strict Priority (SP)	--	--	--	--	--	--	--	--	

Queue Scheduling

Port

1/0/1

Queuing Algorithm

Weighted Fair Queuing(WFQ) ▼

ⓘ

Scheduled according to WFQ. The weight of each queue is set by bytes

Queue ID	Weight
0	90
1	95
2	100
3	105
4	110
5	115
6	120
7	127

Cancel

OK

Queue Scheduling Edit port

Queue Shaping

When the packet sending rate is higher than the receiving rate, or the interface rate of the downstream device is lower than the interface rate of the upstream device, network congestion may occur. If the size of the service traffic sent by users is not limited, the continuous burst of service data from a large number of users will make the network more congested. To make the limited network resources serve users more effectively, it is necessary to restrict the service flow of users.

Queue Shaping

CIR Maximum Rate/CIR (Kbps)

Port	Queue								Operation
	0	1	2	3	4	5	6	7	
1/0/1	100000	--	--	--	--	--	--	--	
1/0/2	--	--	--	--	--	--	--	--	
1/0/3	--	--	--	--	--	--	--	--	
1/0/4	--	--	--	--	--	--	--	--	
1/0/5	--	--	--	--	--	--	--	--	
1/0/6	--	--	--	--	--	--	--	--	
1/0/7	--	--	--	--	--	--	--	--	
1/0/8	--	--	--	--	--	--	--	--	

Queue Shaping

To configure a port, click on the "Edit" icon under the operation column.

Maximum Rate/CIR (Kbps): Configures the maximum rate of shaping. The value must be an integer between 16-1000000 Kbps and must be multiples of 16. By default, it's the port rate.

Queue Shaping [Edit](#)

Port

1/0/2

Queue ID	Enable	Maximum Rate/CIR (Kbps) 
0	☒	1000000
1	☐	
2	☐	
3	☐	
4	☐	
5	☐	
6	☐	
7	☐	

Cancel

OK

Configuration of Maximum Rate

Rate Limit

Interface rate limit can limit the total rate of all packets sent or received on an interface. The interface rate limit also uses the token bucket to control the flow. If an interface rate limit is configured on an interface of the device, all packets sent through this interface must first be processed through the token bucket of the interface rate limiter. If there are enough tokens in the token bucket, the packet can be sent; otherwise, the packet will be discarded or cached.

To configure Rate Limit, please navigate to **Web UI -> QoS -> Rate Limit**.

Rate Limit							
Port	Ingress	Ingress CIR (Kbps)	Ingress CBS (Byte)	Egress	Egress CIR (Kbps)	Egress CBS (Byte)	Operation
1/0/1	Enabled	1000000	2147483647	Enabled	1000000	53247	
1/0/2	Disabled	--	--	Disabled	--	--	
1/0/3	Disabled	--	--	Disabled	--	--	
1/0/4	Disabled	--	--	Disabled	--	--	
1/0/5	Disabled	--	--	Disabled	--	--	
1/0/6	Disabled	--	--	Disabled	--	--	
1/0/7	Disabled	--	--	Disabled	--	--	
1/0/8	Disabled	--	--	Disabled	--	--	
1/0/9	Disabled	--	--	Disabled	--	--	
1/0/10	Disabled	--	--	Disabled	--	--	
1/0/11	Disabled	--	--	Disabled	--	--	
1/0/12	Disabled	--	--	Disabled	--	--	

Rate Limit

To configure a port, click on the **"Edit"** icon under operation column, then set the CIR and CBS for both Ingress and Egress.

CIR (Committed Information Rate): the guaranteed average transmission rate or the minimum guaranteed traffic delivered in the network.

CBS (Committed Burst Size): the average volume of burst traffic that can pass through an interface.

Rate Limit > **Edit**

Port	1/0/1	
Ingress	☒	
*Ingress CIR (Kbps)	1000000	Enter a value between 16-1000000 that is a multiple of
*Ingress CBS (Byte)	2147483647	Valid range is 32768-2147483647
Egress	☒	
*Egress CIR (Kbps)	1000000	Enter a value between 16-1000000 that is a multiple of
*Egress CBS (Byte)	53247	Valid range is 678-53247
Cancel OK		

Rate Limit Edit a port

SECURITY

The switches support many tools and features to enhance the security of the device against misconfiguration or attacks.

Storm Control

Traffic suppression can limit the rate of broadcast, unknown multicast, unknown unicast, known multicast, and known unicast packets by configuring thresholds, preventing broadcast, unknown multicast packets, and unknown unicast packets from generating broadcast storms. Large traffic impact of known multicast packets and known unicast packets.

Storm control can block the traffic of broadcast, unknown multicast and unknown unicast packets by blocking packets or shutting down ports. The device supports storm control for the above three types of packets on the interface according to the packet rate, byte rate, and percentage. During a detection interval, the device monitors the average rate of three types of packets received on the interface and compares it with the configured maximum threshold. When the packet rate is greater than the configured maximum threshold, the device performs storm control on the interface and executes the Configured storm control actions. Storm control actions include blocking packets and shutting down / shutdown interfaces.

- If packets are blocked, when the average rate of receiving packets on the interface is less than the specified minimum threshold, storm control will release the blocking of the packets on the interface.
- If the action is to shut down / shutdown the interface, you need to manually run the command to bring up the interface, or enable the interface state to automatically return to UP, it's also possible to use the **Auto Recovery** function to bring up the interface automatically.

Storm Control

Unit

IFG ☒ Include ☐ Exclude

Port

Port	Status	Broadcast	Broadcast Threshold	Unknown Multicast	Unknown Multicast Threshold	Unknown Unicast	Unknown Unicast Threshold	Action	Operation
1/0/1	Enabled	Enabled	10000	Enabled	10000	Enabled	10000	Drop	
1/0/2	Disabled	--	--	--	--	--	--	Drop	
1/0/3	Disabled	--	--	--	--	--	--	Drop	
1/0/4	Disabled	--	--	--	--	--	--	Drop	

Storm Control page

Storm Control > Edit

Port

Storm Control ☒

Broadcast ☒

*Threshold (Kbps)

Unknown Multicast ☒

*Threshold (Kbps)

Unknown Unicast ☒

*Threshold (Kbps)

Action ☒ Drop ☐ Disabled

Storm Control edit port

Unit	Select Unit: kbps: Storm control rate will be calculated by octet-based. pps: Storm control rate will be calculated by packet-based.
IFG	Select IFG (Inter Frame Gap): Excluded: Exclude IFG when count ingress storm control rate. Included: Include IFG when count ingress storm control rate.
Storm Control -> Edit?	
Port	Displays the selected port.
Storm Control	Select whether to enable Storm Control on the selected port or not.
Broadcast	Set whether to enable the storm threshold setting for broadcast packets. If Enabled Please enter a Treshhold (Kbps).Note: The valid range is 16~1000000, which must be a multiple of 16. Default is 10000.

Unknown Multicast	Set whether to enable the storm threshold setting for the Unknown Multicast packets. If Enabled Please enter a Treshhold (Kbps).Note: The valid range is 16~1000000, which must be a multiple of 16. Default is 10000.
Unknown Unicast	Set whether to enable the storm threshold setting for the Unknown Unicast packets. If Enabled Please enter a Treshhold (Kbps).Note: The valid range is 16~1000000, which must be a multiple of 16. Default is 10000.
Action	Select the state of setting Drop: Packets exceed storm control rate will be dropped. Shutdown: Port exceeds storm control rate will be shutdown.

Storm Control

Port Security


By converting the MAC address learned by the interface into secure MAC addresses (including secure dynamic MAC address, secure static MAC address and Sticky MAC) , port security prevents illegal users from communicating with the switch through this interface, thereby enhancing the security of the device.

On the **Secure MAC Addresses** tab, use **VLAN/MAC Address/Port** to filter entries. The list shows **VLAN**, **MAC Address**, **Type**, **Port**, and **Operation**.

Security MAC addresses are divided into: Secure Dynamic MAC, Secure Static MAC and Sticky MAC.

Secure Dynamic MAC Address	If enabled but the Sticky MAC function is not enabled.	If the device is restarted, the entries will be lost and need to be relearned.
Secure Static MAC Address	Static MAC address manually configured when port security is enabled.	The entries will not be aged, and will not be lost after a reboot.
Sticky MAC Address	The MAC address converted after the port security is enabled and the Sticky MAC function is enabled at the same time	The entries will not be aged , and the addresses will not be lost after restarting the device.

Secure MAC Address Types

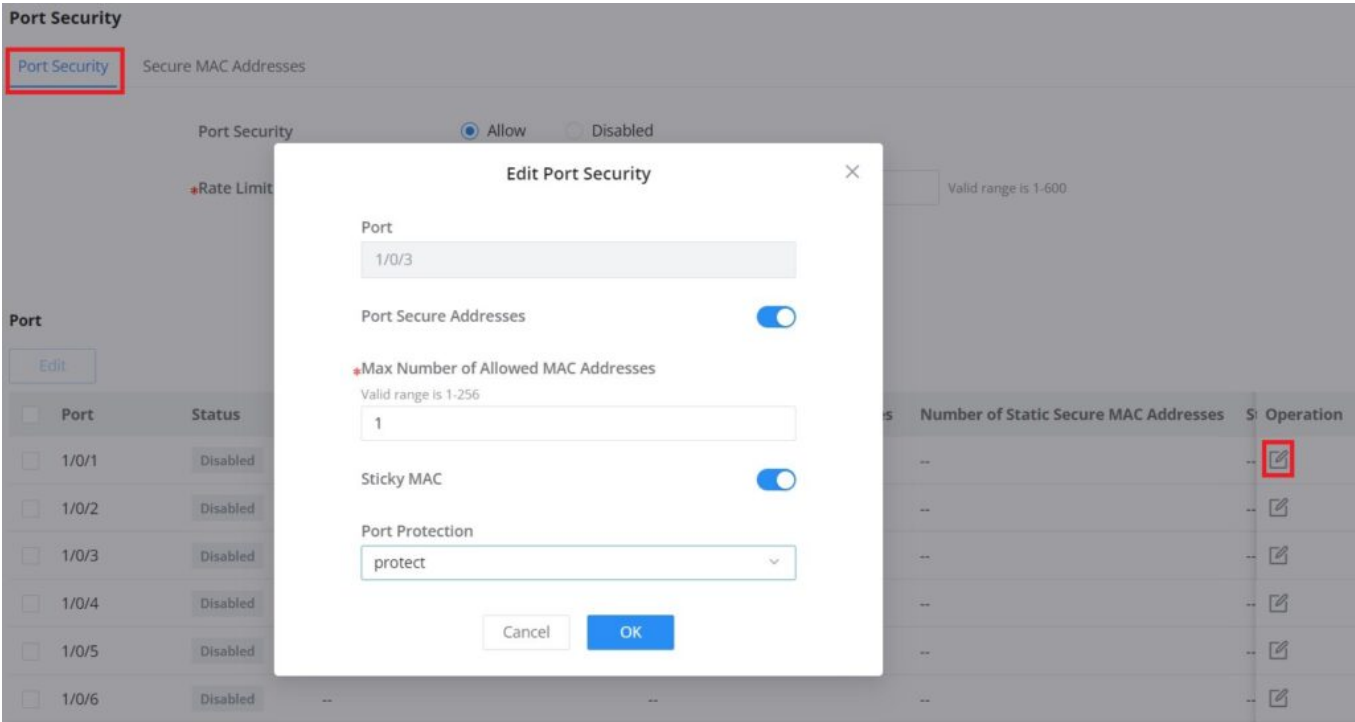

Port Security

Port Security	Click Allow to set the port security function to be enabled globally , by default is disabled.
---------------	--

Rate Limit (packet/s)	Set the rate at which the port MAC address is learned. The value is an integer from 1 to 600, the default is 100.
Edit Port Security	
Port	Displays the selected ports.
Port Security Address	Click to enable Port Security Address, by default is disabled.
Maximum MAC Number	Set the maximum number of MAC addresses to be learned by the interface , the value range is an integer from 1 to 256 , and the default is 1 . After the maximum number is reached , if the switch receives a packet whose source MAC address does not exist, regardless of whether the destination MAC address exists, the switch considers that there is an attack by an illegal user, and will protect the interface according to the port protection configuration (Protect, Restrict or Shutdown).
Sticky MAC	When the port security is enabled, the Sticky MAC function can be enabled, by default it's disabled . When enabled, the interface will convert the learned secure dynamic MAC address into a Sticky MAC. If the maximum number of MAC addresses has been reached, the MAC address in the non-sticky MAC entry learned by the interface will be discarded , and a trap alarm will be reported according to the interface protection mode configuration.
Port Protection	Set the protection action when the number of MAC addresses learned by the interface reaches the maximum number or static MAC address flapping occurs .There are three modes (Protect, Restrict or Shutdown), the default is Protect. Protect: Only discard the packets whose source MAC address does not exist, and does not report an alarm. Restrict: Discard packets with nonexistent source MAC addresses and report an alarm. Shutdown: The interface state is set to error-down and an alarm is reported. Note: By default, an interface will not automatically recover after being shut down, and the interface can only be enabled by the network administrator under the interface. If you want the shut down interface to be restored automatically , you can enable Port Auto Recovery function to automatically restore the interface status to Up.

Port Security

Port Isolation

With the port isolation function, the isolation between ports in the same VLAN can be realized. As long as the user adds the port to the isolation group, the Layer 2 data isolation between the ports in the isolation group can be realized. The port isolation function provides users with a safer and more flexible networking solution.

Due to software limitations, only one isolation group is currently supported, and the port isolation function is disabled by default, that is, the port is added to the default isolation group . After joining , two-way isolation is performed between ports .

Port	Isolation Status/Operation
1/0/1	
1/0/2	
1/0/3	
1/0/4	
1/0/5	
1/0/6	
1/0/7	
1/0/8	
1/0/9	
1/0/10	

Port Isolation

ACL

Access control list (ACL) is a collection of one or more rules. A rule is a judgment statement that describes the matching conditions of a packet. These conditions can be the source address, destination address, port number, etc. of the packet. ACL is essentially a packet filter, and the rule is the filter element of the filter. The device matches packets based on these rules, filters out specific packets, and allows or organizes the packets to pass through according to the processing policy of the service module that applies the ACL.

- One ACL supports setting multiple rules. When the rule settings (except the rule number) are identical, it will prompt "This rule already exists"
- If there is no match after all the rules are traversed, the Deny message will be sent directly.

IPv4/IPv6 ACL

To add an IPv4 or IPv6 ACL rule, navigate to **Security -> ACL -> IPv4 tab or IPv6 tab**, then click on "Add" button to add an IPv4/IPv6 based ACL rule.

*ACL Name	ACL_rule
Rule Settings	
*Rule ID	1
Action	Allow
Protocol Type	Any
Source IP Address	☐ Any ☒ Custom
*Source IP Address	192.168.80.0
*Source IP Mask	255.255.255.0
Destination IP Address	☒ Any ☐ Custom
Tos Type	Any
Time Policy	None

ACL IPv4IPv6

The rules action can be defined in one of the four ways below:

- **Drop:** This action denies or blocks traffic that matches the specified ACL rule, which prevents the packet from being forwarded through the network.
- **Allow:** This action permits traffic that matches the ACL rule, allowing the packet to pass through and continue to its destination.
- **Shut Down:** This action disables the interface or port that the traffic is passing through if the ACL rule is triggered, effectively stopping all traffic on that interface.
- **Redirect to Interface:** This action forwards the traffic matching the ACL rule to a different interface than it was originally destined for, often used for traffic monitoring, load balancing, or security purposes.

Tos Type Any

Time Policy None

Advanced Settings

Count ☒

*Count ID Valid range is 1-32

Count Unit ☒ By packet ☐ By byte

Mirroring ☒

*Mirroring Group

Go to "Maintenance>Diagnostics>Mirroring" to configure the monitor port to take effect

Priority Mapping ☒

*Priority Valid range is 0-7

Rate Limit Disabled

The rate limit function needs to go to "Security→ACL→Rate Limit Settings" to configure the rate limit group to take effect

ACL IPv4IPv6 Advanced Settings

Tos Type

Time Policy

Advanced Settings

Count

Mirroring

Priority Mapping

Rate Limit

Any

Disabled

1

2

3

4

5

6

7

1

The rate limit function needs to go to "Security→ACL→Rate Limit Settings" to configure the rate limit group to take effect

Cancel

OK

ACL IPv4IPv6 Rate Limit

The rate limit function needs to go to "Security -> ACL -> Rate Limit Settings" to configure the rate limit group to take effect.

Configuring an ACL-based RSPAN

To perform an ACL-based RSPAN, please follow the below steps:

- Select an image group in ACL Image

IPv4 ACL > Add ACL

Rule Settings

Rule ID

1

Valid range is 1-2147483647. The smaller ID is matched first.

Action

Allow

Protocol Type

Any

Source IP Address

Any

Custom

Destination IP Address

Any

Custom

Tos Type

Any

Time Policy

None

Advanced Settings

Count

Mirroring

Mirroring Group

Group 1

Go to "Maintenance>Diagnostics>Mirroring" to configure take effect.

Priority Mapping

Rate Limit

Disabled

The rate limit function needs to go to "Security→ACL→Rate Limit Settings" to configure the rate limit group to take effect

Cancel

OK

ACL Based RSPAN

- Then, under **ACL ->VLAN Binding ACL**, select the corresponding port/VLAN binding ACL.

ACL

IPv4 ACL

IPv6 ACL

MAC ACL

Port Binding to ACL

VLAN Binding to ACL

Rate Limit Settings

Edit

Unbind

VLAN	IPv4 ACL Name	MAC ACL Name	Operation
1	--	--	

Total 1

<

1

>

10 / page

Edit

VLAN

1

IPv4 ACL

TEST

MAC ACL

None

Cancel

OK

© 2024 Grandstream Networks, Inc. Grandstream Software License Agreement

IPv4 ACL VLAN

- Then go to **Diagnostics -> Mirroring -> Setup Mirroring Group**. If you select RSPAN, you can only use it as a source switch and you need to set the output port and remote VLAN.

Diagnostics > Edit Mirroring Port

Role: Source Switch

Ingress Mirroring
Click on port to select/unselect

Port

2 4 6 8 10 12 14 16 18 20 22 24

1 3 5 7 9 11 13 15 17 19 21 23 25 SFP1 26 SFP2 27 SFP3 28 SFP4

LAG

2 4 6 8

1 3 5 7

Egress Mirroring
Click on port to select/unselect

Port

2 4 6 8 10 12 14 16 18 20 22 24

1 3 5 7 9 11 13 15 17 19 21 23 25 SFP1 26 SFP2 27 SFP3 28 SFP4

LAG

2 4 6 8

1 3 5 7

Output Port: 1/0/4

Remote VLAN: Please select

Please select Remote VLAN

Cancel OK

Setup Mirroring Group

MAC ACL

To add an ACL based on the MAC address, on the MAC ACL tab, click on the **"Add"** button to add an ACL rule, then configure the **Source MAC Address** and the **Destination MAC Address** accordingly. Please refer to the figure below:

*ACL Name

Rule Settings

*Rule ID

Action

Protocol Type ☒ Any ☐ Custom

Source MAC Address ☐ Any ☒ Custom

*Source MAC Address : : : : :

*Source MAC Mask : : : : :

Destination MAC Address ☒ Any ☐ Custom

VLAN ☒ Any ☐ Custom

802.1p Priority

Time Policy


MAC address based ACL

Port Binding to ACL

ACL Binding lets the user bind MAC ACL or IP ACL to certain ports GE/LAG.

To apply IP/MAC ACL rules on multiple ports, select the ports first then click on the **"Edit"** button, then select the IP and MAC ACL rule from the drop-down list.

To apply the ACL rule on a specific port, click on the **"Edit icon"** on the right side of the page as shown below:

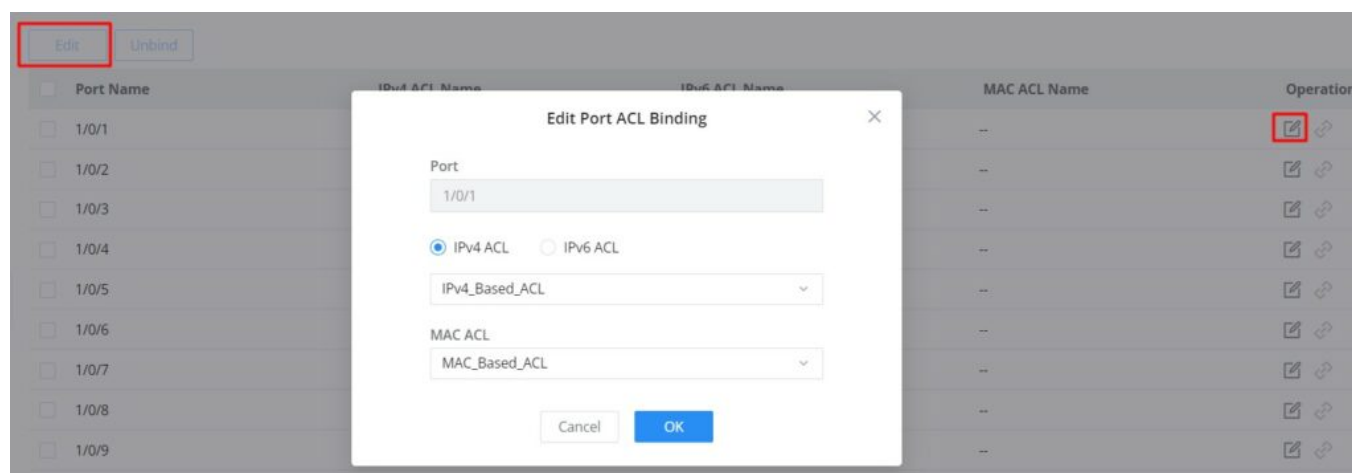


ACL Binding

VLAN Binding to ACL

On this page, the users can bind the IP/MAC ACL rule to a VLAN(s), to apply the ACL rules to multiple VLANs, first check the VLANs from the list then click on the "Edit" button, select the ACL rule from the drop-down list under IP/MAC ACL.

For example: if the IP/MAC ACL rule is configured with a rate limit, and then bound to a VLAN, the bandwidth limit will be applied to the specified VLAN.

refer to the figure below:

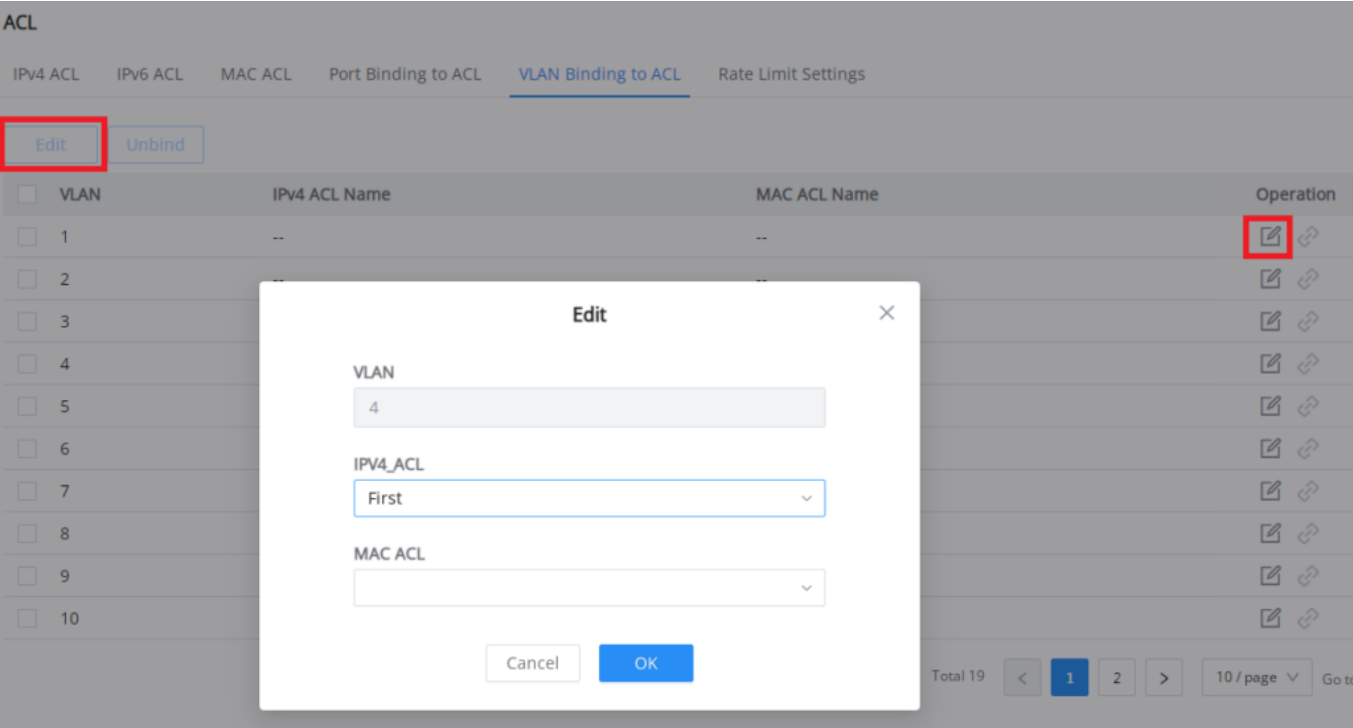

VLAN Binding to ACL

Rate Limit Settings

The Rate Limit Settings section in ACL (Access Control List) allows users to configure rate limiting for up to 128 groups. Rate limiting helps manage and control the amount of traffic sent or received on the network, preventing congestion and ensuring fair usage. This feature is crucial for maintaining optimal network performance and avoiding overloads.

Field or action	Description
By packet	Burst Packet (pps): 1 to 65535, default 10. Rate Threshold (pps): 1 to 262143.
By byte	Burst Byte (Bps): 1024 to 8388480 in multiples of 128. Rate Threshold (KBps): 2 to 125000 in multiples of 2.

ACL rate-limit settings

ACL

[IPv4 ACL](#)[IPv6 ACL](#)[MAC ACL](#)[Port Binding to ACL](#)[VLAN Binding to ACL](#)[Rate Limit Settings](#)

Rate Limit Group ID	Rate Limit Type	Burst Threshold	Rate Threshold	Operation
1	By packet	20000 pps	150000 pps	
2	By byte	8388480 Bps	125000 KBps	
3	--	--	--	
4	--	--	--	
5	--	--	--	
6	--	--	--	
7	--	--	--	
8	--	--	--	
9	--	--	--	
10	--	--	--	

ACL Rate Limit Settings

The users can configure up to 128 groups, by clicking on the "**Edit icon**" under the operation column.

- Click on the "**Edit icon**" under the Operation column to configure a group.
- Select the **Rate Limit Type** to determine if the limit will be by **packet or byte**.
- Specify the **Burst Packet/Byte**, which sets the maximum number of packets or bytes allowed to be sent in a burst.
- Set the **Rate Threshold**, which defines the maximum rate of packets or bytes per second.

Rate Limit Group ID

1

Rate Limit Type

☒ By packet ☐ By byte

*Burst Packet (pps)

Valid range is 1-65535

20000

*Rate Threshold (pps)

Valid range is 1-262143

150000

Cancel

OK

ACL Edit Rate Limit Group

IP Source Guard

IP source guard is a source IP address filtering technology based on the Layer 2 interface. It can prevent malicious hosts from forging IP addresses of legitimate hosts to impersonate legitimate hosts, and also ensure that unauthorized hosts cannot access by specifying their IP addresses. network or attack the network. IPSG uses the binding table (source IP address, source MAC address, VLAN to which it belongs, and the binding of the inbound interface) to match and check the IP packets received on the Layer 2 interface. Only the packets matching the binding table are allowed to pass through.

It's recommended to enable first DHCP Snooping by navigating to **Security -> DHCP Snooping**.

To enable IP Source Guard, first navigate to the **Security -> IP Source Guard** page, then select the port and click on "**Edit**" to configure the port.

IP Source Guard

Port Protection

Quaternary Binding Table

Edit

Port	IP Source Guard	Verification Type	Number of Quaternary Bindings	Operation
☐ 1/0/1	Disabled	IP	1	
☒ 1/0/2	Enabled	IP	--	
☐ 1/0/3	Disabled	IP	--	

IP Source Guard

Then, select the **Verification Type** where either the verification will be based on IP addresses or both IP and MAC addresses. **Max Entries** limits the number of IP/MAC addresses (e.g. devices) where 0 indicates no limit.

Edit Port Security



Port

1/0/1

IPSG



Verification Type



IP



IP-MAC

***Max Entries**

Valid range is 0-50. 0 indicates no limit.

0

Cancel

OK

IP Source Guard Edit port

This page displays the dynamic binding (port, IP, MAC, VLAN) generated when DHCP Snooping is enabled on the switches, also the user can add static binding by clicking on the "**Add**" button as shown below:

Dynamic entries require enabling **DHCP Snooping**.

To import or export the list click on the **import or export button** respectively.

IP Source Guard

Port Protection

Quaternary Binding Table

Add	Delete	Refresh	Import	Export		
☐ Port	IPv4 Address	MAC Address	VLAN	Type	Lease Time (s)	Operation
☐ 1/0/1	192.168.80.5	C0:74:AD:FF:FF:FF	1	Static	--	
Total 1 < 1 > 10 / page						

Quaternary Binding Table

The binding requires specifying the port, IP Address and its mask, MAC address and its mask, and the VLAN ID. This information will be used to verify the traffic and make sure all the traffic is generated by legitimate users.

Add Quaternary Binding

*Port

1/0/1

*IP Address

IPv4 format

192.168.80.3

*Mask ⓘ

IPv4 format

255.255.255.255

MAC Address

The MAC address must be a unicast address.

c0 : 74 : ad : dd : dd : dd

*Mask

FF : FF : FF : FF : FF : FF

*VLAN

Valid range is 1-4094

1

Cancel

OK

Add Quaternary Binding

IPv6 Source Guard

IPv6 Source Guard is similar to [IP Source Guard](#) (based on IPv4), the only difference is that IPv6 Source Guard filters IPv6 addresses.

IPv6 Source Guard

Port Protection

Quaternary Binding Table

Edit

Port	IPv6 Source Guard	Verification Type	Number of Quaternary Bindings	Operation
☐ 1/0/1	Disabled	IPv6	--	
☒ 1/0/2	Enabled	IPv6	--	
☐ 1/0/3	Disabled	IPv6	--	

IPv6 Source Guard

To enable IPv6 Source Guard on a port, select the port and click on the "Edit" button under the operation column, then select the **Verification Type** and specify the **Max Entries**.

Edit Port Security



Port

1/0/1

IPSG



Verification Type



IP



IP-MAC

*Max Entries

Valid range is 0-50. 0 indicates no limit.

0

Cancel

OK

IPv6 Source Guard Edit port

On this tab, the user can see the list of binding both static and dynamic (DHCP Snooping must enabled). To add a static entry, click on the "Add" button, it's also possible to import or export the list as shown below:

IPv6 Source Guard

Port Protection Quaternary Binding Table

Add		Delete	Refresh	Import	Export		
☐	Port	IPv6 Address	MAC Address	VLAN	Type	Lease Time (s)	Operation
☐	1/0/1	2001:db8:85a3::8a2e:370:7334	C0:74:AD:FF:FF:FF	1	Static	--	

Total 1 < 1 > 10 / page

IPv6 Quaternary Binding Table

Specify the binding (port, IP address, MAC Address, and VLAN), then click on the "OK" button to save.

Add Quaternary Binding

*Port

1/0/1

*IP Address

IPv6 format and must be a valid unicast address

2001:db8:3333:4444:5555:6666:7777:8888

*Prefix Length

Valid range is 1-128

128

MAC Address

The MAC address must be a unicast address.

c0 : 74 : ad : d5 : 44 : 5a

*Mask

FF : FF : FF : FF : FF : FF

*VLAN

Valid range is 1-4094

Cancel

OK

IPv6 Quaternary Binding edit port

Anti Attack

Field or action	Description
Attack checks	TCP Attack: TCP SYN-RST, SYN-FIN, X-Mass Scan, SYN Nonack Sport, Null Scan, TCP Fragment, and TCP Min Hdr. Other checks include Land, SMAC=DMAC, ICMP Ping for IPv4 and IPv6, IPv4 Ping of Death, ICMP Fragment, and IPv6 Min Fragment.

Minimum Fragment (Byte)	Displayed when IPv6 Min Fragment is enabled. Accepts 0 to 65535 bytes; default 1240.
Minimum Hdr (Byte)	Displayed when TCP Min Hdr is enabled. Accepts 0 to 31 bytes; default 20.

Anti Attack controls

In the network, there are a large number of malicious attack packets targeting the CPU and various types of packets that need to be normally sent to the CPU. Malicious attack packets targeting the CPU will cause the CPU to be busy processing attack packets for a long time, thereby causing interruption of other services or even system interruption; a large number of normal packets will also lead to high CPU usage and performance degradation, thus affecting the normal business.

In order to protect the CPU and ensure that the CPU can process and respond to normal services, the switch provides a local attack defense function, which is aimed at the packets sent to the CPU. It operates normally to avoid the mutual influence of various services when the device is attacked.

Attack defense is an important network security feature. It analyzes the content and behavior of the packets sent to the CPU for processing, determines whether the packets have attack characteristics, and configures certain preventive measures against the packets with attack characteristics. Defense attacks are mainly divided into malformed packet attack defense, fragmented packet attack defense, and flood attack defense.

Anti Attack

Abnormal

Land

Smurf Attack

*Netmask Length

8

Valid range is 0-32

TCP Attack

Flag Illegal Attack

☒ SYN-RST
☒ SYN-FIN
☒ X-Mass Scan

Other

☒ SYN Nonack Sport
☒ Null Scan

SMAC=DMAC

ICMP Ping

☐ IPv4
☐ IPv6

IPv4 Ping of Death

Blat

☐ TCP
☐ UDP

Fragment

ICMP Fragment

IPv6 Min Fragment

Cancel

OK

Anti Attack

Dynamic ARP Inspection (DAI)

To defend against man-in-the-middle attacks and prevent data of legitimate users from being stolen by the man-in-the-middle, you can enable dynamic ARP inspection. The device compares the source IP, source MAC, interface, and VLAN information corresponding to the ARP packet with the information in the binding table. If the information matches, it means that the user who sent the ARP packet is legitimate, and the user is allowed. If the ARP packet passes, otherwise it is considered an attack and the ARP packet is discarded.

Dynamic ARP inspection can be enabled in the interface view, or VLAN view. When enabled in the interface view, the binding table matching check is performed on all ARP packets received by the interface; when enabled in the VLAN view. Then, the binding table matching check is performed on the ARP packets belonging to the VLAN received by the interface that joins the VLAN.

When the device discards a large number of ARP packets that do not match the binding table, if you want the device to alert the network administrator in the form of an alarm, you can enable the dynamic ARP inspection discarded packet alarm function. When the number of discarded ARP packets exceeds the alarm threshold, the device generates an alarm.

DAI

DAI

VLAN

1

Valid range is 1-4094. Example: "5-8, 11" will associate VLANs 5, 6, 7, 8 and 11.

Cancel

OK

Port

Edit

☐	Port	Trust Port	Source MAC Address Verification	Destination MAC Address Verification	IP Address Verification	Speed (pps)	Operation
☐	1/0/1	Disabled	Enabled	Enabled	Enabled	0	
☐	1/0/2	Disabled	Disabled	Disabled	Disabled	0	
☐	1/0/3	Disabled	Disabled	Disabled	Disabled	0	

DAI page

DAI > Edit

Port

1/0/1

Trust Port

Source MAC Address Verification

Destination MAC Address Verification

IP Address Verification

All-Zero Address

Rate (pps)

0

Valid range is 0-50

Cancel

OK

The statistics about DAI activities will be listed here for each port GE/LAG with the options of refreshing the statistics or clearing specified port data.

DAI

DAI		Statistics					Des	Operation
		Forwarding Packets	Source MAC Address Verification Failures	Destination MAC Address Verification Failures	Source IP Address Verification Failures			
☒	Port							
☒	1/0/1	0	0	0	0	0		
☒	1/0/2	0	0	0	0	0		
☒	1/0/3	0	0	0	0	0		
☒	1/0/4	0	0	0	0	0		
☒	1/0/5	0	0	0	0	0		
☒	1/0/6	0	0	0	0	0		
☒	1/0/7	0	0	0	0	0		
☒	1/0/8	0	0	0	0	0		
☒	1/0/9	0	0	0	0	0		
☒	1/0/10	0	0	0	0	0		
☒	1/0/11	0	0	0	0	0		

DAI Statistics

RADIUS

RADIUS is a distributed, client /server information exchange protocol that can protect the network from unauthorized access. It is often used in various network environments that require high security and allow remote users to access it. This protocol defines the UDP-based RADIUS packet format and its transmission mechanism and specifies destination UDP ports 1812 and 1813 as the default authentication and accounting port numbers, respectively.

Radius provides access services through authentication and authorization and collects and records the use of network resources by users through accounting. The main features of RADIUS protocol are client/server mode, secure message exchange mechanism, and good expansibility.

RADIUS

Add
Delete

☒	Server Address	UDP Port	Priority	Max Retransmission Count	Timeout (s)	Operation
☒	192.168.5.5	*RADIUS Server Address	192.168.5.5			
		*UDP Port	1812			
		*Priority	16			
		*Shared Key	password			
		*Max Retransmission Count	1			
		*Timeout (s)	10			
			Cancel	Save		

While RADIUS shared keys can be configured via the Web UI, only the CLI supports input of pre-encrypted password strings (e.g., \$6\$...) for secure deployment and automation. For CLI usage and formatting guidelines, refer to the GWN78xx CLI User Guide.

TACACS+

TACACS+ (Terminal Access Controller Control System Protocol) is a security protocol with enhanced functions based on the TACACS protocol. This protocol is similar in function to the RADIUS protocol and uses the client/server mode to implement the communication between the NAS and the TACACS+ server.

TACACS+ is a centralized, client /server structure information exchange protocol, which uses TCP protocol for transmission, and the TCP port number is 49. The authentication, authorization, and accounting servers provided by TACACS+ are independent of each other and can be implemented on different servers. It is mainly used for authentication, authorization, and accounting of access users who access the Internet through point-to-point protocol PPP or virtual private dial-up network VPDN and management users who perform operations.

TACACS+ is similar to RADIUS protocol : (1) both adopt client /server mode in structure; (2) both use shared keys to encrypt the transmitted user information ; (3) both have better flexibility and expansibility. TACACS+ has more reliable transmission and encryption characteristics and is more suitable for security control.

TACACS+

[Add](#) [Delete](#)

☒	Server Address	TCP Port	Priority	Timeout (s)	Operation
☒	192.168.5.11	49	3	5	Edit Delete

*TACACS+ Server Address

*TCP Port

*Priority

*Shared Key

*Timeout (s)

[Cancel](#) [Save](#)

TACACS+

While TACACS+ shared keys can be configured via the Web UI, only the CLI supports input of pre-encrypted password strings (e.g., \$6\$...) for secure deployment and automation. For CLI usage and formatting guidelines, refer to the GWN78xx CLI User Guide.

AAA

Access control is used to control which users can access the network and which network resources can be accessed. AAA is short for Authentication, Authorization, and Accounting, and provides a management

framework for configuring access control on NAS (Network Access Server) devices.

As a management mechanism of network security, AAA provides services in a modular manner:

- Authentication , confirming the identity of users accessing the network , and judging whether the visitor is a legitimate network user;
- Authorization , giving different users Different permissions limit the services that the user can use;
- Billing , record all operations during the user's use of network services, including the type of service used, start time, data flow, etc., to collect and record the user's The usage of network resources, and can realize the charging requirements for events and traffic, and also monitor the network.

AAA adopts a client /server structure. The AAA client runs on the access device, usually referred to as a NAS device, and is responsible for verifying user identity and managing user access; the AAA server is a collective name for the authentication server, authorization server, and accounting server. Responsible for centralized management of user information. AAA can be implemented through a variety of protocols. Currently, devices support AAA based on RADIUS or TACACS+ protocol. In practical applications, the RADIUS protocol is most commonly used.

AAA

Login Authentication

Console

default

Telnet

User1

SSH

SSH

HTTPS

Method

Add

Delete

☐	AAA Name	Method 1	Method 2	Method 3	Method 4	Operation
☐	default	None	Empty	Empty	Empty	
☐	User1	Local	Empty	Empty	Empty	
☐	SSH	Enable	Empty	Empty	Empty	

AAA

To add a method click on the "Add" button and to modify a method click on the "Modify" icon as shown above:

Edit Method



AAA Name

User1

Method 1

Local

None

Local

Enable

Radius

Tacacs+

Method 4

Local

Cancel

OK

Add/Edit a method

Method	Description	Applicability
None	No authentication is performed. Users can log in without a username or password. This setting should generally be avoided due to security risks.	Console, Telnet, SSH, Web UI
Local	Uses the local user database on the switch for authentication. User credentials are stored directly on the switch.	Console, Telnet, SSH, Web UI
Enable	Requires users to enter an enable password to gain elevated privileges (admin access). This provides an additional layer of security after initial authentication. Note: The password for user mode to enter privileged mode must be set using CLI.	Console, Telnet, SSH
RADIUS	Utilizes a RADIUS server for authentication. RADIUS (Remote Authentication Dial-In User Service) is used for centralized Authentication, Authorization, and Accounting management.	Console, Telnet, SSH, Web UI
TACACS+	Utilizes a TACACS+ server for authentication. TACACS+ (Terminal Access Controller Access-Control System Plus) offers more granular control over authorization and is used for centralized AAA management.	Console, Telnet, SSH, Web UI

AAA Methods

Identity Authentication Management

The Identity Authentication Management feature on Grandstream GWN switches provides a robust method for securing network access through 802.1X and MAC-based authentication. It allows administrators to

configure and manage user authentication settings, ensuring only authorized devices can connect to the network, thereby enhancing overall network security and control.

The 802.1X protocol is a port-based network access control protocol. Port-based network access control refers to verifying user identities and controlling their access rights at the port level of LAN access devices. The 802.1X protocol is a Layer 2 protocol and does not need to reach Layer 3. It does not require high overall performance of the access device, which can effectively reduce network construction costs. Authentication packets and data packets are separated by logical interfaces to improve security.

Port Mode

To enable 802.1x and MAC authentication, please navigate to **Security -> Identity Authentication Management**, then Toggle on "**802.1X Authentication**" and "**MAC Authentication**", and click on the "**OK**" button to save.

Field or action	Description
Authentication Type / Method	Selects the authentication type and method applied to the port.
User ID format of MAC-based	Displayed when MAC Authentication is enabled. It controls the MAC-address format used as the authentication user ID; the observed format was XXXXXXXXXXXX.
Authentication Sessions	The session list includes Session ID, Port, and MAC Address.
AAA methods	AAA method lists expose Method 1 through Method 4.

Identity authentication fields

On this page also, you can specify a **user ID format for MAC-based** and enable a **Guest VLAN**. This ensures these devices remain isolated from the main network while still maintaining limited network connectivity through the Guest VLAN. The Guest VLAN ID directs unauthenticated users to a designated network segment, providing controlled and secure access.

Identity Authentication Management

Port Mode

Port

Authentication Sessions

Local User of MAC-based

802.1X Authentication

☒

MAC Authentication

☒

User ID format of MAC-based

XXXXXXXXXXXX

Guest VLAN

☒

Guest VLAN ID

7

Cancel

OK

Port

Edit

☐	Port	User Authentication Mode	Authentication Method / Method	Guest VLAN	Authorized VLAN	Operation
☐	1/0/1	Port-Based	802.1X / Radius	Disabled	Static	
☐	1/0/2	MAC-Based	MAC Authentication / Local	Disabled	Static	
☐	1/0/3	Single User	802.1X / Radius	Enabled	Static	
☐	1/0/4	MAC-Based	--	Disabled	Static	

Identity Authentication Management Port Mode

To enable it on a port, select port(s) from the list then click on "Edit" button or click on "Edit icon" on the right side under operation column.

Note: a RADIUS server must first be added under [Security -> RADIUS](#).

Port Mode > Edit

Port

1/0/1

User Authentication Mode ⓘ

MAC-Based

MAC-Based

Port-Based

Single User

Guest VLAN

Authorized VLAN ⓘ

Authentication Method1

Authentication Method ⓘ

MAC Authentication

Method ⓘ

Local

Radius

Add +

Authentication Method2

Authentication Method ⓘ

802.1X

Method ⓘ

Radius

Add +

Cancel

OK

Port Mode Edit port

Port	The specific port being configured. This field shows the port number (e.g.
User Authentication Mode	The mode of user authentication to be used on this port. Options include: MAC-Based
Guest VLAN	Enables or disables the Guest VLAN for this port. If enabled
Authorized VLAN	Specifies the VLAN ID that authenticated users will be assigned to. This ensures that authorized devices are placed in the correct network segment.
Authentication Methods(x)Note: click on "Add+" to add another method.	
Authentication Method1	Select the authentication method, two options:802.1X: it will use 802.1x authentication, RADIUS must be first added.MAC Authentication: it will use local MAC Addresses under Security -> Identity Authentication Management page -> Local User of MAC-based or RADIUS depending on the seleted method.
Method	* If MAC Authentication is selected, the user can add two methods: Radius and Local.* If 802.1x is selected, the user can only select radius.Note: When Radius is selected, the switch includes the Calling-Station-Id attribute in the Access-Request message, containing the MAC address of the connected device. This allows RADIUS servers to apply identity-based policies and track client devices using their hardware address.

Port Mode - Edit port

Port

On this tab, the users can enable on which ports the authentication will take effect, select the port(s) and then click on "Edit" button or icon to configure the port(s) as shown below:

Identity Authentication Management

Port ModePortAuthentication SessionsLocal User of MAC-based

Edit

☐	Port	Port Control	Reauthentication	Max User Count	Reauthentication Timer	Inactive Timer	Quiet Timer	Operation
☐	1/0/1	Force authentication	Enabled	256	3600	60	60	
☐	1/0/2	Auto	Enabled	256	3600	60	60	
☐	1/0/3	Force unauthentication	Enabled	256	3600	60	60	
☐	1/0/4	Disable	Disabled	256	3600	60	60	

Identity Authentication Management port page

To enable the authentication on the port(s), under Port Control (Disable, Force authentication, Force unauthentication, Auto) select Auto or Force authentication and then save the configuration.

Identity Authentication Management > Edit

Port

1/0/1

Port Control

Reauthentication

*Max User Count

Common Timer

*Reauthentication Time (s)

*Inactive Interval (s)

*Quiet Time (s)

802.1X Parameters Settings

*Resend EAP Request (s)

*Supplicant Timeout (s)

Force authentication

Disable

Force authentication

Force unauthentication

Auto

Valid range is 1-256

3600

Valid range is 300-2147483647

60

Valid range is 60-65535

60

Valid range is 0-65535

30

Valid range is 1-65535

30

Valid range is 1-65535

Cancel

OK

Identity Authentication Management port edit port

The 802.1X must be also configured on the device connected to the switch port.
Example of 802.1X configuration on GXV3480 IP Video phone.

802.1X Mode

<

802.1X Mode

>

802.1X ModeEAP-MD5>

802.1X Identityhope

802.1X Secret....

8021X Mode on GXV3480

Authentication Sessions

On this tab, the authenticated devices will be listed here with more details. Please refer to the figures below:

Identity Authentication Management

Port ModePortAuthentication SessionsLocal User of MAC-based

RefreshClear All

Q Session ID/Port/M.

Session ID	Port	MAC Address	Status	Configuration			
				VLAN	Session Time (s)	Inactive Time (s)	Quiet Time (s)

Authentication Sessions

There are three status (Authorized, Locked, Guest):

Refresh

Clear All

Session ID	Port	MAC Address	Status
0000000911847958	1/0/6	C0:74:AD:03:CA:80	Authorized

Authentication Sessions Status Authorized

0000000911847958	1/0/6	C0:74:AD:03:CA:80	Locked
------------------	-------	-------------------	--------

Authentication Sessions Status Locked

0000000911847958	1/0/6	C0:74:AD:03:CA:80	Guest
------------------	-------	-------------------	-------

Authentication Sessions Status Guest

Local User of MAC-based

The "Local User of MAC-based" feature in Grandstream GWN switches provides a way to add and manage users based on their MAC addresses. This feature ensures that only devices with specified MAC addresses are granted network access, enhancing security and control over network resources.

Identity Authentication Management

Port Mode

Port

Authentication Sessions

Local User of MAC-based

Add

Delete

Delete All

☐	MAC Address	Port Control	VLAN	Reauthentication Time (s)	Inactive Time (s)	Operation
☐	C0:74:AD:01:92:94	Force Unauthorized	--	--	--	
☐	C0:74:AD:03:CA:80	Force Authorized	1	3600	60	

Local User of MAC based

Add Local User of MAC-based



The MAC address of local user must be a unicast one.

*MAC Address

C0 : 74 : AD : 01 : 92 : 94

Port Control

☒ Force Authorized ☐ Force Unauthorized

VLAN

Valid range is 1-4094

1

Reauthentication Time (s)

Valid range is 300-2147483647

3600

Inactive Time (s)

Valid range is 60-65535

60

Cancel

OK

Add local User of MAC based

MAC Address	The MAC address of the local user must be a unicast one.
Port Control	* Force Authorized: Forces the port to authorize the device with the specified MAC address, allowing it access to the network.* Force Unauthorized: Forces the port to not authorize the device, preventing it from accessing the network.
VLAN	Valid range is 1-4094.
Reauthentication Time (s)	Valid range is 300-2147483647.
Inactive Time (s)	Valid range is 60-65535.

Add local User of MAC-based

DHCP Snooping

DHCP snooping ensures that DHCP clients obtain IP addresses from legitimate DHCP servers, and records the correspondence between IP addresses and MAC addresses of DHCP clients to prevent DHCP attacks on the network.

In order to ensure the security of network communication services, the DHCP Snooping technology is introduced, and a firewall is established between the DHCP Client and the DHCP Server to defend against various attacks against DHCP in the network.

When the device reboots, the dynamic binding table for the IP source guard is automatically restored.

Note: Associated with the "Entries Fixed for DHCPv6 Snooping" option of DHCPv6 Snooping.

Users can configure fixed entries for DHCP Snooping, ensuring that when the device reboots, the dynamic

binding table for IP source guard is automatically restored after a fixed duration defined in seconds. Note that this is linked to the 'Entries Fixed for DHCPv6 Snooping' option in DHCPv6 Snooping.

Enable **Entries Fixed for DHCP Snooping** to preserve eligible learned bindings for restoration after reboot. When enabled, **Fixed Duration (s)** accepts 15 to 86400 seconds and defaults to 300 seconds.

To enable the DHCP Snooping feature on the switch, navigate to Security -> DHCP Snooping, then enable DHCP Snooping, to make the DHCP snooping enabled on a VLAN, specify the VLANs or a VLAN range for example 5-8 means VLANs from 5 to 8, click "**OK**" button to save. Please refer to the figure below:

The screenshot shows the 'DHCP Snooping' configuration page. It includes tabs for 'DHCP Snooping', 'Option 82', 'Port Settings', and 'Statistics'. The 'DHCP Snooping' tab is active. The configuration includes three toggle switches: 'DHCP Snooping' (checked), 'Entries Fixed for DHCP Snooping' (checked), and 'Fixed Duration (s)' (set to 300). Below these is a 'VLAN' field with the value '1-2'. To the right of the 'Fixed Duration' and 'VLAN' fields are hints: 'Valid range is 15-86400' and 'Valid range is 1-4094. Example: "5-8, 11" will associate VLANs 5, 6, 7, 8 and 11.' respectively. At the bottom are 'Cancel' and 'OK' buttons.

DHCP Snooping General page

DHCP Snooping Option 82

Option 82 is called the relay agent information option and is inserted by the DHCP relay agent when forwarding client-originated DHCP packets to a DHCP server.

To identify the device accessed by the client, the user specifies the Remote ID, the format can be either Normal (standard) or **Private**:

- **Normal Format:** is generally used when interoperability with equipment from other vendors is required. By default, the switch's MAC address is used, but a custom value containing 1 to 63 characters can be configured.
- **Private Format:** is specific to the vendor's ecosystem and may not be compatible with other vendors' equipment (check the vendor-specific format).

Option 82 is used to identify both the Circuit ID and Remote ID of the specific port, this can be used to identify the VLAN, interface, and other information where the client is located. To define this information, go to DHCP Snooping -> Option 82, choose a specific port:

DHCP Snooping

DHCP Snooping Option 82 Port Settings Statistics

Format ☒ Normal ☐ Private

*Remote ID 1~63 characters

Option 82

Port	VLAN	Circuit ID	Remote ID
 No Data			

DHCP Snooping Option 82

Then, select a port, VLAN and Format, and specify the Circuit ID and Remote ID:

Add Option 82 ✕

Port

VLAN

Format ☒ Normal ☐ Private

*Circuit ID
1~63 characters

Remote ID
0~63 characters

DHCP Snooping Option 82 Add Circuit

Please note that the Remote ID per port is different from the global remote ID of the switch.

DHCP Snooping Port Settings

On this page, the user can configure the trusted port(s) that will allow DHCP messages, all other ports that are not trusted will discard the DHCP messages. This protects users from rogue DHCP servers that are plugged into untrusted ports.

To configure a port(s), either select the port(s) and click on the "Edit" button or click on the "Edit icon" under the operation column as seen below:

DHCP Snooping

DHCP Snooping

Option 82

Port Settings

Statistics

Edit						
Port	Trust Mode	Chaddr Verification	Speed(pps)	Option 82	Option 82 Mode	Operation
☒ 1/0/1	Enabled	Disabled	0	Enabled	Keep	
☐ 1/0/2	Disabled	Disabled	0	Disabled	Drop	
☐ 1/0/3	Disabled	Disabled	0	Disabled	Drop	
☐ 1/0/4	Disabled	Disabled	0	Disabled	Drop	
☐ 1/0/5	Disabled	Disabled	0	Disabled	Drop	

DHCP Snooping Port Settings

To make a port trusted, Toggle ON **Trust Mode**, more security parameters can be enabled too like **Chaddr Verification**, **Rate (pps = packet per seconds)** to limit the number of DHCP packets, and enable Option 82 for this port with three modes (keep, drop, replace). Please refer to the figure below:

Port Settings > Edit

Port

1/0/1

Trust Mode

☒

Chaddr Verification

☐

*Rate (pps)

0

Valid range is 0-300

Option 82

☒

Option 82 Mode

Keep

Cancel

OK

DHCP Snooping Port Settings Edit

DHCP Snooping Statistics

This page displays all statistics recorded by DHCP snooping function including Forwarding packets, Untrusted Port Drops, etc.

To clear the statistics, select the ports and click on "Clear" button as shown below:

DHCP Snooping

DHCP Snooping Option 82 Port Settings Statistics

Clear Refresh						
☒ Port	Forwarding Packets	Chaddr Verification Drops	Untrusted Port Drops	Untrusted Ports with Option 82 Drops	Operation	
☐ 1/0/21	0	0	0	0		
☐ 1/0/22	0	0	0	0		
☐ 1/0/23	0	0	0	0		
☒ 1/0/24	31	0	31	0		
☐ 1/0/25	0	0	0	0		
☐ 1/0/26	0	0	0	0		
☐ 1/0/27	0	0	0	0		

DHCP Snooping Statistics

DHCPv6 Snooping

DHCPv6 snooping is a security feature in IPv6 networks that safeguards against unauthorized DHCPv6 server messages and controls IPv6 address assignments, similar to how [DHCPv4 snooping](#) operates in IPv4 networks.

To enable the DHCPv6 Snooping feature on the switch, navigate to **Security -> DHCPv6 Snooping**, then enable DHCPv6 Snooping, to make the DHCPv6 snooping enabled on a VLAN, specify the VLANs or a VLAN range for example 5-8 that means VLANs from 5 to 8, click "**OK**" button to save. Please refer to the figure below:

Enable **Entries Fixed for DHCPv6 Snooping** to preserve eligible learned bindings for restoration after reboot. When enabled, **Fixed Duration (s)** accepts 15 to 86400 seconds and defaults to 300 seconds. This behavior is associated with the corresponding DHCP Snooping setting.

DHCPv6 Snooping

DHCPv6 Snooping Option Settings Port Settings Statistics

DHCPv6 Snooping



VLAN

1,5-8,20

Valid range is 1-4094. Example: "5-8, 11" will associate VLANs 5, 6, 7, 8 and 11.

Cancel

OK

DHCPv6 Snooping

DHCPv6 Snooping Option 18

On this page, the user can configure the Remote ID (Option 37), by default, the switch uses its own MAC address.

The DHCPv6 Relay-Option, encompassing Option 18 and Option 37, enables a DHCPv6 relay agent to embed circuit-specific and remote information as a TLV (type-length-value) within the relay message sent to the DHCPv6 server. In this scenario, the managed device functions as a DHCPv6 relay agent.

To add option 18 for a port, click on the "**Add**" button as shown below:

DHCPv6 Snooping
Option Settings
Port Settings
Statistics

Option 37
Remote ID
c0:74:ad:ba:24:fc
1-63 characters
Cancel
OK

Option 18
Add
Delete

Port	Interface ID	Operation
1/0/1	VLAN1	

Total 1
1
10 / page

DHCPv6 Snooping Option Settings

Then, select the port, Format (Standard, Extended), when the Standard format is selected then the user can select the VLAN and if the Extended Format is selected the user can interface ID (3~63 characters), click on "OK" to save.

Add Option 18

Port
1/0/1

Format
Standard

*Interface ID
VLAN1

Cancel
OK

DHCPv6 Snooping Add option 18

DHCPv6 Snooping Port Settings

On this page, the user can configure the trusted port(s) that will allow DHCP messages, all other ports that are not trusted will discard the DHCP messages. This protects users from rogue DHCP servers that are plugged into untrusted ports.

To configure a port(s), either select the port(s) and click on the "Edit" button or click on the "Edit icon" under the operation column as seen below:

DHCPv6 Snooping

DHCPv6 Snooping Option Settings Port Settings Statistics

Edit

Port	Trust Mode	Speed	Option 18	Option 37	Operation
☒ 1/0/1	Enabled	300	Drop	Keep	
☐ 1/0/2	Disabled	0	Disabled	Disabled	
☐ 1/0/3	Disabled	0	Disabled	Disabled	
☐ 1/0/4	Disabled	0	Disabled	Disabled	

DHCPv6 Snooping Port Settings

To make a port trusted, Toggle ON **Trust Mode**, more security parameters can be enabled too like **Rate (pps)** = packet per seconds) to limit the number of DHCPv6 packets, and enable Option 18 and 37 for this port with three modes (keep, drop, replace). Please refer to the figure below:

Port Settings > **Edit**

Port	1/0/1
Trust Mode	☒
*Rate (pps)	300 Valid range is 0-300
Option 18	☒
Option 18 Mode	Drop
Option 37	☒
Option 37 Mode	Keep
Cancel OK	

DHCPv6 Snooping Port Settings Edit

DHCPv6 Snooping Statistics

This page displays all statistics recorded by DHCPv6 snooping function including Forwarding packets, Untrusted Port Drops, etc.

To clear the statistics, select the ports and click on "**Clear**" button as shown below:

DHCPv6 Snooping

DHCPv6 Snooping Option Settings Port Settings Statistics

Clear

Refresh

Port	Forwarding Packets	Untrusted Port Drops	Untrusted Ports with Option 37 Drops	Untrusted Ports with Option 18 Drops	Invalid Drop	Operation
☒ 1/0/1	0	0	0	0	0	
☐ 1/0/2	0	0	0	0	0	
☐ 1/0/3	0	0	0	0	0	
☐ 1/0/4	0	0	0	0	0	

DHCPv6 Snooping Statistics

MAINTENANCE

Upgrade

The switches support manual firmware upgrades using a BIN file downloaded from the Grandstream Firmware page: <https://www.grandstream.com/support/firmware>.

Field or action	Description
Upload Firmware File to Update	Selects a local firmware BIN file for a manual upgrade.
Allow DHCP Option 43/160/66 to Override Server	Allows DHCP-provided provisioning information to override the configured server.
Firmware Upgrade Protocol	Selects the protocol used to retrieve firmware.
Check/Download New Firmware at Bootup	Checks for and downloads available firmware during startup when enabled.
Scheduled Upgrade	Runs a firmware upgrade according to the configured schedule.

Upgrade controls

Upgrading via network is also possible using 5 of these protocols:

- TFTP
- HTTP
- HTTPS
- FTP
- Explicit FTPS

Once the protocol is selected, then the user needs to specify the firmware Server Path (For example: [firmware.grandstream.com](https://www.grandstream.com)).

- Username and Password must be specified if the Server requires it.
- For FTP protocol use the header "**ftp://**" and for FTPS use "**ftps://**"
- Considering the memory problem of the device, the upload upgrade supports streaming upgrade, and the upgrade is carried out while uploading.

Upgrade

① Current version: 1.0.5.29

Upgrade via Manual Upload

Upload Firmware File to Update

Select file to upload



Supported file formats: bin

Upgrade via Network

Allow DHCP Option 43/160/66 to Override Server ①

On

Firmware Upgrade Protocol ①

HTTP

Firmware Server Path ①

TFTP

HTTP

HTTPS

FTP

Explicit FTPS

FTP/Explicit FTPS/HTTP/HTTPS Username

FTP/Explicit FTPS/HTTP/HTTPS Password

Check/Download New Firmware at Bootup



Scheduled Upgrade



Once enabled, the switch will automatically detect and upgrade within the scheduled time

Cancel

OK

Check for Updates

Upgrade

Diagnostics

The switches support many diagnostics tools that can help the user troubleshoot the issue and resolve it. These tools include Logs, Ping, Traceroute, Mirroring, Fiber Module, Copper Test, and One-Click Debugging.

Logs

This page lists all the generated Logs with details level and generated time, also an option to export the list is available.

Log Server Address	Refresh	Clear All	Export	Start date	End date	All logs	Q Details
Generated Time	Level	Details					
Aug 08 2023 01:36:46	Notice	PORT-5-LINK_UP: Interface VLAN90 link up					
Aug 08 2023 01:36:41	Notice	PORT-5-LINK_UP: Interface VLAN10 link up					
Aug 08 2023 01:23:56	Notice	AAA-5-CONNECT: New https connection for user admin, source 192.168.80.235 ACCEPTED					
Aug 08 2023 01:21:04	Notice	PORT-5-LINK_UP: Interface VLAN7 link up					
Aug 08 2023 01:21:03	Notice	PORT-5-LINK_UP: Interface Ethernet1/0/24 link up					
Aug 08 2023 01:18:59	Error	PROVISION-3-FAILED: Firmware decerr server					
Aug 08 2023 01:12:44	Notice	PORT-5-LINK_DOWN: Interface VLAN1 link down(merged 1)					
Aug 08 2023 01:12:44	Notice	PORT-5-LINK_DOWN: Interface Ethernet1/0/1 link down(merged 1)					
Aug 08 2023 01:12:44	Notice	PORT-5-LINK_UP: Interface VLAN1 link up(merged 2)					
Aug 08 2023 01:12:42	Notice	PORT-5-LINK_UP: Interface Ethernet1/0/1 link up(merged 2)					

Recent Downloads ×
ram.log
2,987 B • Done

Total 37 < 1 2 3 4 > 10 / page Go to

Diagnostics Logs

Adding a Log Server Address to the logs to be sent to is also supported on these switches.

Diagnostics > **Log Server Address**

Add

Log Server Address	Port	Minimum Log Level	Operation
192.168.80.11	514	Notice	 

Edit Log Server Address

Log Server Address

192.168.80.11

Port

The range is 1-65535.

514

Minimum Log Level

Notice

Cancel

Save

Log Server Address

Users can Configure the following elements in the logs settings:

- **Minimum log level:** This defines the lowest severity of events that will be logged. "Debug" means all messages, including detailed diagnostic information, will be recorded. Other log levels (e.g., Info, Warning, Error) would filter out lower-priority messages.
- **Log Aggregation:** This option allows you to merge multiple logs from various sources or components into a centralized location for easier monitoring, analysis, and management.
- **Timeout:** This setting defines the time, in seconds, before the logging operation times out. In the example shown, the timeout is set to 60 seconds. The valid range for the timeout is between 15 and 3600 seconds.

Diagnostics

Logs

Ping

Ping Watchdog

Traceroute

Mirroring

Fiber Module

Copper Test

One-click Debugging

Management Platform Connection Diagnostics

Log Server Address

Refresh

Clear All

Export

Settings

Start date

→

End date

All logs

Q Details

Details	Level	Generated Time
AAA-S-CONNECT: New https connection for user admin, source 192.168.70.230 ACCEPTED	Notice	Sep 05 2024 21:48:35
SYSTEM-S-CPU_INFO: utilization:27 user:86479 nice:1811 system:539532 idle:1536953 irq:0 softirq:0 guest:2043	Notice	Sep 05 2024 21:37:10
SYSTEM-S-MEM_INFO: utilization:63 total:125564 avail:45852 Unevictable:0 used:113676 free:11888 buffer:6080 cached:38388 shared:0 AnonPages:15928 Slab:6236 VmUsed:48544 calcu:128420	Notice	Sep 05 2024 21:37:10
SYSTEM-S-CPU_INFO: utilization:26 user:74338 nice:1505 system:452741 idle:1276491 irq:0 softirq:0 guest:1745	Notice	Sep 05 2024 20:37:10
SYSTEM-S-MEM_INFO: utilization:63 total:125564 avail:45668 Unevictable:0 used:113812 free:11752 buffer:6080 cached:38340 shared:0 AnonPages:15928 Slab:6284 VmUsed:48544 calcu:128292	Notice	Sep 05 2024 20:37:10
AAA-S-CONNECT: New https connection for user admin, source 192.168.70.230 ACCEPTED	Notice	Sep 05 2024 20:22:02
SYSTEM-S-CPU_INFO: utilization:30 user:59012 nice:1196 system:362847 idle:1022490 irq:0 softirq:0 guest:1279	Notice	Sep 05 2024 19:37:10
SYSTEM-S-MEM_INFO: utilization:64 total:125564 avail:44464 Unevictable:0 used:114820 free:10744 buffer:6000 cached:38228 shared:0 AnonPages:16700 Slab:6240 VmUsed:48544 calcu:127980	Notice	Sep 05 2024 19:37:10
AAA-S-CONNECT: New https connection for user admin, source 192.168.70.230 ACCEPTED	Notice	Sep 05 2024 19:34:26
SYSTEM-S-CPU_INFO: utilization:26 user:46228 nice:947 system:275672 idle:763079 irq:0 softirq:0 guest:905	Notice	Sep 05 2024 18:37:10

Total 299

<

1

2

3

...

30

>

10 / page

Go to

Log Diagnostics

Settings



Minimum Log Level 

Debug



Log Aggregation



*Timeout (s)

Valid range is 15-3600

60

Cancel

OK

Log Diagnostics

Ping

Field or action	Description
IP Address/Hostname	Enter the destination IPv4 address or host name.
Packet Count	Accepts 1 to 65535 packets.
Packet Size	Accepts 0 to 65500 bytes.
VLAN Interface	Selects the source Layer 3 interface used for the test.
Start	Starts the ping test with the configured values.

Ping diagnostics

The user in this page can enter the IP Address or Hostname then click "**Start**", the results of the ping command will be shown below.

*IP Address/Hostname	192.168.80.116	
*Packet Count	4	Valid range is 1-65535
*Packet Size	56	Valid range is 0-65500
VLAN Interface	None	▼

Start

Results

```

PING 192.168.80.116 (192.168.80.116): 56 data bytes
64 bytes from 192.168.80.116: seq=0 ttl=64 time=0.000 ms
64 bytes from 192.168.80.116: seq=1 ttl=64 time=0.000 ms
64 bytes from 192.168.80.116: seq=2 ttl=64 time=0.000 ms
64 bytes from 192.168.80.116: seq=3 ttl=64 time=0.000 ms

--- 192.168.80.116 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 0.000/0.000/0.000 ms

```

Ping

Ping Watchdog

Ping Watchdog is a feature designed to monitor the connectivity of a device by continuously pinging a specified IP address. If the device becomes unresponsive to pings, then corrective actions can be triggered based on the configuration settings.

Port: Specifies the port on the device that will be monitored or managed by Ping Watchdog.

Enable: Toggles the Ping Watchdog feature on or off for the selected port.

IP Address: The target IP address to which the device will send ping requests.

Packet Sending Interval (s): Defines how frequently (in seconds) ping packets are sent to the specified IP address.

Delay Time (s): This sets a delay before the Ping Watchdog starts monitoring the device after it's enabled or after a reboot.

Retry Times: Specifies how many failed ping attempts are allowed before the watchdog takes action.

Shutdown Interval (s): how long the switch keeps the port shutdown before bringing it back up after a Ping Watchdog failure.

ⓘ PoE port needs to consider the PD device boot time to ensure that the device has been booted and can work normally. Namely: enable delay time + send packet interval * retries ≥ PD boot time

Port	1/0/2	
Enable	☒	
*IP Address	192.168.70.25	IPv4 format
*Packet Sending Interval (s)	30	Valid range is 30-3600
*Delay Time (s)	60	Valid range is 60-3600
*Retry Times	2	Valid range is 1-10
*Shutdown Interval (s)	5	Valid range is 5-30
Cancel OK		

Ping watchdog

Traceroute

Another tool is Traceroute which shows the number of hops, and the switch allows the user to run traceroute commands directly from its web UI.

*IP Address/Hostname

Results

```
traceroute to 192.168.80.116 (192.168.80.116), 30 hops max, 38 byte packets
 1  192.168.80.116 (192.168.80.116)  10.000 ms  0.000 ms  0.000 ms
```

Traceroute

Mirroring

Mirroring refers to copying the packets from the specified source to the destination port. The specified source is called the mirroring source, the destination port is called the observing port, and the copied packet is called the mirroring packet.

Mirroring can make a copy of the original packet without affecting the normal processing of the original packet by the device, and send it to the monitoring device through the observation port to determine whether the service running on the network is normal.

The switches support two modes of Port Mirroring: SPAN and RSPAN:

- **SPAN (Local):** Traffic is mirrored locally within the same switch.
- **RSPAN (Remote):** Traffic is mirrored remotely across a network using a Remote VLAN.

SPAN

The traffic mirroring occurs locally within the same switch. SPAN allows you to capture traffic from one or more ports and send a copy of it to another port, typically connected to a network analyzer or monitoring tool.

- **Ingress Mirroring:** Captures incoming traffic on the source port(s).
- **Egress Mirroring:** Captures outgoing traffic from the source port(s).
- **Source Port:** Where the traffic originates (the port being monitored).
- **Tx/Rx Regular Data Messages:** defines what type of traffic (transmit, receive, or both) is monitored on the destination switch.

Diagnostics > **Edit Mirroring Port**

Group: 1

Mode: SPAN

Ingress Mirroring

Click on port to select/unselect

Port

2	4	6	8	10	12	14	16	18	20	22	24				
1	3	5	7	9	11	13	15	17	19	21	23	25 SFP1	26 SFP2	27 SFP3	28 SFP4

LAG

2	4	6	8
1	3	5	7

Egress Mirroring

Click on port to select/unselect

Port

2	4	6	8	10	12	14	16	18	20	22	24
---	---	---	---	----	----	----	----	----	----	----	----

Port Mirroring

RSPAN

RSPAN (Remote Switched Port Analyzer) allows traffic to be mirrored from one switch to another over a network. Unlike SPAN, which is limited to mirroring traffic locally within the same switch, RSPAN uses a **Remote VLAN** to transport mirrored traffic across multiple switches, enabling centralized monitoring.

Source Switch Role (RSPAN)

- **Ingress Mirroring:** This captures incoming traffic on the specified source port(s). It mirrors the packets received by the port before they are processed by the switch, forwarding them to the designated destination for monitoring or analysis.
- **Egress Mirroring:** This captures outgoing traffic from the specified source port(s). It mirrors the packets leaving the port after the switch processes them, forwarding these packets to the monitoring destination.
- **Output Port:** This is the port on the source switch where the mirrored traffic is sent. In SPAN, it's usually a local port that connects to the monitoring device, but in RSPAN, this traffic is forwarded across a network using the Remote VLAN to the destination switch.
- **Remote VLAN:** This is the VLAN used to transport mirrored traffic between the source switch and the destination switch in an RSPAN configuration. The source switch forwards mirrored traffic to this VLAN, which allows it to be sent across the network to the destination switch for analysis.

Group

1

Mode

RSPAN

Role

Source Switch

Ingress Mirroring

Click on port to select/unselect

Port

2 4 6 8 10 12 14 16 18 20 22 24

1 3 5 7 9 11 13 15 17 19 21 23 25 SFP1 26 SFP2 27 SFP3 28 SFP4

LAG

2 4 6 8

1 3 5 7

Egress Mirroring

Click on port to select/unselect

Port

2 4 6 8 10 12 14 16 18 20 22 24

1 3 5 7 9 11 13 15 17 19 21 23 25 SFP1 26 SFP2 27 SFP3 28 SFP4

Source Switch Role

Destination Switch Role (RSPAN)

- **Source Port:** This is the remote VLAN where the mirrored traffic from the source switch arrives. The destination switch receives the mirrored packets via this VLAN and forwards them to the appropriate monitoring port.
- **Monitor Port TX/RX:** This defines what type of traffic (transmit, receive, or both) is monitored on the destination switch.
- **Remote VLAN:** The VLAN used to receive mirrored traffic from the source switch. It's the same VLAN that the source switch uses to forward the mirrored traffic over the network to the destination switch.

Group

1

Mode

RSPAN

Role

Destination Switch

Source Port

Click on port to select/unselect

Port

2

4

6

8

10

12

14

16

18

20

22

24

1

3

5

7

9

11

13

15

17

19

21

23

25 SFP1

26 SFP2

27 SFP3

28 SFP4

LAG

2

4

6

8

1

3

5

7

Monitor Port

1/0/2

Tx/Rx Regular Data Messages

☒

Remote VLAN

Please select

Cancel

OK

Destination Switch Role RSPAN

Fiber Module

This page provides the user with the information about the fiber module for each Port that supports it. Select the port from the drop-down list and click refresh icon.

Note: The information displayed on the optical module of each manufacturer is different.

Fiber

1/0/25

Fiber Info



Port Name:1/0/25
OE present: Remove
Loss of signal: Loss
Transceiver Type:
Connector Type :
Ethernet Compliance Code: 0B/0B
Transmission Media:
Wavelength: 0
Bitrate: 0
Vendor OUI: 0:0:0
Vendor Name:
Vendor PN:
Vendor Revision:
Vendor SN:
Temperature: 0.0°C
Voltage: 0.00V
Current: 0.00mA
TX Power: 0.00dBm
RX Power: 0.00dBm

Fiber Module

Copper Test

Copper test can detect whether the cable connected to the switch is faulty and the location of the fault. Using this function can assist in the daily engineering installation diagnosis .

Please navigate to **Web UI -> Maintenance -> Diagnostics page -> Copper Test Tab.**

When performing cable detection, please ensure that the electrical port is not in the UP state, otherwise the detection result will not be available.

To perform the test simply click on the port, please refer to the figure below:

 Please ensure the Ethernet port is down when do copper test. Otherwise, it cannot be detected.



Click the port in figure above to do the copper test

Results	
Port Name	1/0/6
Cable status	Open
Cable length	3.46m

Copper Test

After the detection, the cable detection result is displayed as follows:

Cable Status: OK (normal), Open (open circuit), Short (short circuit), Crosstalk (crosstalk), Unknown (unknown).


Cable Length:

- When there is a fault: it is the length from the port to the fault location.
- When there is no fault: it is the actual length of the cable.

One-click Debugging

The One-click Debugging feature can help administrators or technical support staff to quickly and easily get debugging information about the GWN switch in a matter of few minutes.

Please navigate to **Web UI -> Maintenance -> Diagnostics page -> One-click Debugging tab**, then click on **"Debug"** button to start the debugging process.



Perform one-click debugging on the device to obtain debugging information

Debug



oneclickdebug20230706093531.tar.gz

194.36KB 2023/07/06 09:35:45



One click Debugging

It's also possible to delete the generated file or download it locally to share it with tech-support for example. The folder contains many logs files and even a tech-support file that containing valuable information like the switch configuration etc.

oneclick debugging

- tmp
- var
- boot.log
- boot_last.log
- dev.log
- dhcpcd-intfv0.log
- flash.log
- other.log
- ram.log
- router_cmd.log
- snmpd.log
- tech-support**
- zebra.log

Type: File
Size: 1.58 MB
Date modified. 10:11 AM

One click Debugging Folder

Management Platform Connection Diagnostics

If the switch is added to the GDMS networking ,GWN Manager, or a GWN Router, it will display a Cloud icon with a green check mark (as shown in the figure below) indicating it's added to a GDMS Networking account, GWN Manage, or to a GWN Router.

In case there is an issue with the connection, then the user can navigate to **Maintenance -> System Diagnosis -> Cloud/Manager Connection Diagnostics** and then click on **"Detection"** or **"Redetection"** button to see in what stage/step the connection has failed. Refer to the figure below:

Diagnostics

LogsPingPing WatchdogTracerouteMirroringFiber ModuleCopper TestOne-click DebuggingManagement Platform Connection Diagnostics

Connected Platform:GDMS NetworkingConnected Status: ConnectedManagement Address: eu-router.gwn.cloud:443

Connect Result

✓Preparation Stage

✓Domain Resolution Stage

✓TCP Connection Stage

✓TLS Connection Stage

✓HTTP(S) Transaction Stage

✓WS(S) Upgrade Stage

Logs

Get LogExport

CloudManager Connection Diagnostics

Backup and Restore

Click on "Factory Reset" button to reset the switch back to default settings, or restore to previously saved backup by uploading a configuration file, these configuration files can be used as a way to back up the device running configuration or saved configuration.

Backup & Restore

Factory Reset

After factory reset, all settings on the switch will be restored to factory default. It is recommended to back up the current configuration before factory resetting.

Factory Reset

Restore Configuration

Switch configuration can be restored by importing a configuration file. If restoration fails, a hard reset to factory settings may be necessary. To hard reset, hold down the RESET button on the front of switch for five seconds and let go.

Upload Configuration File

Backups

Back Up Running Configurations

Back Up Saved Configurations

Name	Date	Size	Operation
GWN7813P_C0-74-AD-DF-CC-94_config20230808085203.cfg	2023/08/08 08:52:03	3.09KB	Download Refresh Delete
GWN7813P_C0-74-AD-DF-CC-94_config20230808085154.cfg	2023/08/08 08:51:57	3.15KB	Download Refresh Delete

Backup and Restore

SNMP

Network Management Protocol (SNMP) is an "Internet-standard protocol for managing devices on IP networks". Devices that typically support SNMP include routers, switches, servers, workstations, printers, modem racks and more. SNMP is used mostly in network management systems to monitor network-attached devices for conditions that warrant administrative attention. SNMP is a component of the Internet Protocol Suite as defined by the Internet Engineering Task Force (IETF). It consists of a set of standards for network management, including an application layer protocol, a database schema, and a set of data objects. An SNMP-managed network consists of three key components:

- Managed device
- Agent - software which runs on managed devices
- Network management station (NMS) - software which runs on the manager

A managed device is a network node that implements an SNMP interface that allows unidirectional (read-only) or bidirectional (read and write) access to node-specific information. Managed devices exchange node-specific information with the NMSs. Sometimes called network elements, the managed devices can be any type of device, including, but not limited to, routers, access servers, switches, bridges, hubs, IP telephones, IP video cameras, computer hosts, and printers. An agent is a network-management software module that resides on a managed device. An agent has local knowledge of management information and translates that information to or from an SNMP-specific form. A network management station (NMS) executes applications that monitor and control managed devices. NMSs provide the bulk of the processing and memory resources required for network management. One or more NMSs may exist on any managed network.

The global settings page allows the user to enable the SNMP function with the Local Engine ID or add a Remote Engine ID.

SNMP

Global Settings

View Management

Group Management

Community Management

User Management

Notification Management

Trap Event

SNMP

80006a92

C074ADB93CA7

2-56 bits, must be even bits and hex

Reset

Cancel

Save

Remote Engine ID

Add

Remote Engine ID

12AF56CD78BC57

Edit Remote Engine ID

*Remote Engine ID

10-64 bits, must be even bits and hex

12AF56CD78BC57

*Server Address

192.168.1.3

Cancel

Save

Operation

SNMP Global Settings

SNMP	Select whether to enable SNMP.
------	--------------------------------

Local Engine ID	Set the engine ID of the local SNMP entity or click "Reset" to restore to the initial value. Note: The default is 8000 A59Dxxxxxxx, where xxxxxxxx is the device MAC address by default, which can be modified by the user. It is expressed in hexadecimal, and the length is limited between 2 and 56 characters. The number of characters must be an even number.
Edit Remote Engine ID?	
Remote Engine ID	Set the engine ID of the SNMP management side, and the remote user is established under the remote engine. The input length is limited to 10-64 characters, expressed in hexadecimal, and the number of characters must be an even number.
Server Address	Set the address of the network management station server, support input of Hostname and IP address (including IPv4 and IPv6), and need to meet the requirements of various types of address formats, otherwise an error message is required.

SNMP Global Settings

View Management

This page allows the network administrator to create MIB views (Management information base) and then include or exclude OID (Object Identifier) in a view.

SNMP

Global Settings **View Management** Group Management Community Management User Management Notification Management Trap Event

Add

View	OID Subtree	Type	Operation
View1	.1.3.1.1	Included	
View2			
all			

Add View

*View
1-32 characters, supports numbers and letters
View2

*OID Subtree
Must be a combination of numbers and dots, such as .1.3.6.1.2.1.1
.1.3.6.79

Type
☒ Included
 ☐ Excluded

Cancel Save

SNMP View Management

Group Management

When adding an SNMP group, configure the access views with the exact fields **Read-Only View**, **Read-Write View**, and **Notification View**.

This page allows the network administrator to group SNMP users and assign different authorization and access privileges.

SNMP

Global Settings View Management **Group Management** Community Management User Management Notification Management Trap Event

[Add](#)

Group	Security Mode	Security Level	Read-only view	Read-write view	Notification View	Operation
Group1	SNMPv3	AuthPri	View2	View1	all	 

*Group

Group1

Security Mode

SNMPv3

Security Level

AuthPri

Read-only view

View2

The view can only be viewed, not edited

Read-write view

View1

The view can be read and written. If no view selected, the SNMP manager cannot read and write all MIB objects of the device.

Notification View

all

The management software can receive abnormal alarm information sent by the selected view. If no view selected, the SNMP daeling will not send trap information to SNMP manager.

[Cancel](#) [Save](#)

SNMP Group Management

Community Management

This page allows a user to add/remove multiple communities of SNMP.

SNMP

Global Settings View Management Group Management **Community Management** User Management Notification Management Trap Event

[Add](#)

Community	Type	View	Permission	Group	Operation
GWN7800	Advanced	--	--	Group1	 
Grandstream	Advanced	--	--	Group1	 
public					 

*Community

GWN7800

Type

☐ Basic ☒ Advanced

*Group

Group1

[Cancel](#) [Save](#)

SNMP Community Management

SNMP User Management

This page allows a user to configure the SNMPv3 user profile.

SNMP

Global Settings View Management Group Management Community Management **User Management** Notification Management Trap Event

[Add](#)

User	Group	Security Level	Authentication Mode	Encryption Mode	Operation
User1	Group1	NoAuthNoPri	None	None	 
User2	Group1	AuthPri	SHA	DES	 
User3					 

*User: User2

*Group: Group1

Security Level: AuthPri

Authentication Mode: ☐ MD5 ☒ SHA

*Authentication Password:

Encryption Mode: DES

*Encryption Password:

[Cancel](#) [Save](#)

SNMP User Management

Notification Management

This page allows a user to configure a host to receive SNMPv1/v2/v3 notification.

SNMP

Global Settings View Management Group Management Community Management User Management **Notification Management** Trap Event

[Add](#)

Server Address	UDP Port	Security Mode	Notification Type	Community/User	Security Level	Timeout (s)	Maximum Retries	Operation
192.168.5.11	162	SNMPv3	Traps	User1	AuthPri	--	--	 

*Server Address: 192.168.5.11

*UDP Port: 162

Security Mode: SNMPv3

Notification Type: ☐ Traps ☒ Informs

*User: User1

Security Level: AuthPri

*Timeout (s): 300

*Maximum Retries: 255

[Cancel](#) [Save](#)

SNMP Notification Management

Trap Event

a **Trap event** refers to an alert or notification that is automatically sent by a device or system when a specific event occurs. These events, shown in the SNMP configuration, are various types of conditions that the system is monitoring. When enabled, the device sends a trap to the SNMP manager, notifying it of occurrences like:

- **Authentication failed:** When there is an unauthorized login attempt.
- **Port Up/Down:** When a network port goes offline or comes online.
- **Cold Start/Warm Start:** When the system or device reboots (cold or warm restart).

SNMP

Global Settings

View Management

Group Management

Community Management

User Management

Notification Management

Trap Event

Authentication failed

☒

Port Up/Down

☒

Cold Start

☒

Warm Start

☒

STP Bridge

☐

CPU

☐

Monitor

☐

Port ErrDisable

☐

Port Security

☐

PoE Power Supply

☐

Logs

☐

Configuration Distribution

☐

Cancel

OK

SNMP Trap Event

RMON

RMON (Remote Monitoring) based on SNMP (Simple Network Management Protocol) architecture, functions to monitor the network. RMON is currently a commonly used network management standard defined by the Internet Engineering Task Force (IETF), which is mainly used to monitor the data traffic across a network segment or even the entire network to enable the network administrator to take protection measures in time to avoid any network malfunction. In addition, RMON MIB records network statistics information on network performance and malfunction periodically, based on which the management station can monitor the network at any time effectively. RMON is helpful for network administrators to manage the large-scale network since it reduces the communication traffic between the management station and the managed agent.

RMON Statistics

Ethernet statistics function (corresponding to the statistics group in the RMON MIB): The system collects basic statistics of each network being monitored. The system will continuously count the traffic of a certain network segment and the distribution of various types of packets, the number of error frames of various types, the number of collisions, etc. The number of data packets, the number of broadcast and multicast

packets, the number of received bytes, the number of received packets, etc.

RMON

To use RMON, please enable SNMP>Global Settings>SNMP.

StatisticsHistoryEventAlarm

RefreshClear

☒	Port	Received Bytes	Drop Events	Received Packets	Broadcast Packets	Multiast Packets	CRC & Align Errors	Undersize Pac	Operation
☒	1/0/1	14294925	0	99520	5450	9731	0	0	
☒	1/0/2	0	0	0	0	0	0	0	
☒	1/0/3	0	0	0	0	0	0	0	
☒	1/0/4	0	0	0	0	0	0	0	
☒	1/0/5	0	0	0	0	0	0	0	
☒	1/0/6	0	0	0	0	0	0	0	
☒	1/0/7	0	0	0	0	0	0	0	
☒	1/0/8	0	0	0	0	0	0	0	
☒	1/0/9	0	0	0	0	0	0	0	
☒	1/0/10	0	0	0	0	0	0	0	

RMON Statistics

RMON History

The RMON History list shows **History ID**, **Port**, **Sampling Interval**, **Owner**, **Maximum Samples**, **Current Samples**, and **Operation**. The current UI label is **Sampling Interval**, without "(s)".

The system will periodically collect statistics on various traffic information, including bandwidth utilization, number of error packets, and total number of packets based on the History ID.

Click on the "Add" button to create a History ID specifying the Port as well.

RMON

StatisticsHistoryEventAlarm

Add

History ID	Port	Sampling Interval	Owner	Maximum Samples	Current Samples	Operation
1	GE1	1800	Admin	50		

Edit History

History ID

1

*Port

GE1

*Maximum Samples

The range is 1-50.

50

*Sampling Interval (s)

The range is 1-3600.

1800

Owner

0-32 characters, supports numbers and letters

Admin

Cancel

Save

RMON Event

The RMON Event list shows **Event ID**, **Detail**, **Type**, **Community**, **Owner**, **Event Logs**, and **Operation**.

The event group controls the events and prompts from the device and provides all events generated by the RMON Agent. When an event occurs, it can record logs or send Trap to the network management station.

RMON

Statistics History **Event** Alarm

Add

Event ID	Detail	Type	Community	Owner	Event Logs	Operation
1	Admin	Log&Trap				 

Event ID

1

Detail
0-32 characters, supports numbers and letters
Admin

Type
Log&Trap

Community
1-32 characters, supports numbers and letters
Grandstream

Owner
0-32 characters, supports numbers and letters
Admin

Cancel Save

© Grandstream Networks, Inc.

RMON Event

RMON Alarm

The system monitors the specified alarm variable. After pre-defining a set of thresholds and sampling time for the specified alarm, the system will obtain the value of the specified alarm variable according to the defined time period. When the value of the alarm variable is greater than or equal to the upper threshold, an upper alarm event will be triggered. When the value of the alarm variable is less than or equal to the lower threshold, a lower alarm event is triggered.

RMON

Statistics History Event **Alarm**

Refresh Add

Alarm ID	Port	Counter / Value	Sampling Type	Sampling Interval	Owner	Trigger Mode	Rising Threshol...	Falling Thresho...	Operation
1	GE1	Drop Events/0	Absolute	100	Admin	Rising	100/1	--	 

Alarm ID: 1

*Port: GE1

Counter: Drop Events

Sampling Type: ☒ Absolute ☐ Delta

*Sampling Interval (s): 100

Owner: Admin

Trigger Mode: Rising

*Rising Threshold: 100

*Rising Event: 1

Cancel Save

RMON Alarm

LLDP/LLDP MED

LLDP/LLDP MED is a one-way protocol, there are no request/response sequences. Information is advertised by stations implementing the transmit function, and is received and processed by stations implementing the receive function.

LLDP MED is an enhancement to LLDP that provides additional functionality to support media devices. LLDP MED features include: enabling network policy advertisement and discovery for real-time applications (such as voice and/or video);

LLDP Global Settings

This page allows a user to set general settings for LLDP including enabling LLDP and other parameters.

Field or action	Description
TLV Advertise Interval (s)	Accepts 5 to 32767 seconds.
TTL Multiplier	Accepts 2 to 10.
Port Reinitializing Delay Time (s)	Accepts 1 to 10 seconds.
LLDPDU Transmit Delay Time (s)	Accepts 1 to 8191 seconds.

LLDP global timers

LLDP/LLDP-MED

LLDP Global SettingsLLDP MED Network PolicyLLDP MED Port SettingsDevice InfoNeighbor InfoStatistics

LLDP

TLV Advertise Interval (s)

30

Valid range is 5-32767

TTL Multiplier

4

Valid range is 2-10

Port Reinitializing Delay Time (s)

2

Valid range is 1-10

LLDPDU Transmit Delay Time (s)

2

Valid range is 1-8191

Cancel

OK

Port Settings

Edit

☒	Port	Mode	TLV	Operation
☒	1/0/1	Tx/Rx	PortDescription, SysName, SysDescription, SysCapabilities, ManagementAddrSel, PVID, MacPhySel, Lin...	
☒	1/0/2	Tx/Rx	PortDescription, SysName, SysDescription, SysCapabilities, ManagementAddrSel, PVID, MacPhySel, Lin...	
☒	1/0/3	Tx/Rx	PortDescription, SysName, SysDescription, SysCapabilities, ManagementAddrSel, PVID, MacPhySel, Lin...	

LLDP Global Settings

More configurations can adjusted per port (GE1 to GE10).

LLDP Global Settings > Edit Port Settings

Port

1/0/1

Mode

Tx/Rx

TLV

Basic TLV

☒ Port Description TLV

☒ System Name TLV

☒ System Description TLV

☒ System Capabilities TLV

☒ Management Address TLV

IEEE 802.1TLV

☒ Port VLAN ID TLV

☐ VLAN Name TLV

IEEE 802.3TLV

☒ MAC/PHY Configuration/Status TLV

☒ Link Aggregation TLV

☒ Maximum Frame Size TLV

☐ Power via MDI TLV

Cancel

OK

LLDP Port Settings

LLDP MED Network Policy

This page allows the network administrator to set the MED (Media Endpoint Discovery) network policy. Click on the "Add" button to add a Network Policy or toggle ON **Auto Voice Network Policy** ([Voice VLAN](#) has to be configured as well).

LLDP/LLDP-MED

LLDP Global Settings

LLDP MED Network Policy

LLDP MED Port Settings

Device Info

Neighbor Info

Statistics

*Fast Report Count

3

Valid range is 1-10

Auto Voice Network Policy

Cancel

OK

Network Policy

Add

Delete

☒	Policy ID	Application	VLAN	VLAN Tag	CoS	DSCP	Operation
☒	1	Voice	7	Tagged	6	43	

LLDP MED Network Policy

To add a Network Policy, click on the "Add" button or click on the "Edit" icon under the Operation column to edit.

LLDP MED Network Policy > Edit Network Policy

Policy ID

1

Application

Voice

*VLAN

7

Valid range is 0-4095

VLAN Tag

Tagged

CoS

6

DSCP

43

Cancel

OK

AddEdit Network Policy

LLDP MED Port Settings

The user can configure LLDP MED Settings for each port on this page.

LLDP/LLDP MED

LLDP Global Settings LLDP MED Network Policy **LLDP MED Port Settings** Device Info Neighbor Info Statistics

Edit

Port	LLDP MED	Network Policy TLV	Inventory TLV	Location Identification TLV	PoE-PSE TLV	Operation
☒ GE1	Enabled	Enabled	Enabled	Disabled	Disabled	
☐ GE2						
☐ GE3						
☐ GE4						
☐ GE5						
☐ GE6						
☐ GE7						
☐ GE8						
☐ GE9						
☐ GE10						

Port

GE1

LLDP MED

Network Policy TLV

*Network Policy

Voice

1

+

Add Network Policy

Inventory TLV

Location Identification TLV

PoE-PSE TLV

Cancel

Save

LLDP MED Port Settings

LLDP Device Info

This page displays information for LLDP Local Device connected to each port. Click on the port to view related LLDP information about that port, the information includes: Basic Info, **IEEE 802.1 TLVs** information, **IEEE 802.3 TLVs (802.3 bt)** information, **MED Details**, **Network Policy...**

LLDP/LLDP-MED

[LLDP Global Settings](#) [LLDP MED Network Policy](#) [LLDP MED Port Settings](#) [Device Info](#) [Neighbor Info](#) [Statistics](#)

Local Device Info

Chassis ID Subtype	MacAddr
Chassis ID	C0:74:AD: [redacted]
Device Name	GWN7813P
System Description	GWN7813P
Supported System Capabilities	Bridge, Router
Enabled System Features	Bridge, Router
Port ID Subtype	Local

Local Port Info



Click port figure above to view related LLDP and LLDP-MED details

Basic Info

Chassis ID Subtype	MacAddr
Chassis ID	C0:74:AD: [redacted]
Device Name	GWN7813P
System Description	GWN7813P
Supported System Capabilities	Bridge, Router
Enabled System Features	Bridge, Router

LLDP Device Info

Neighbor Info

This page lists the neighbors obtained on the switch ports. Click on the "Refresh" button to update the list.

LLDP/LLDP-MED

[LLDP Global Settings](#) [LLDP MED Network Policy](#) [LLDP MED Port Settings](#) [Device Info](#) [Neighbor Info](#) [Statistics](#)

[Refresh](#) [Delete](#)

Q Search

☐	Local Port	Chassis ID Subtype	Chassis ID	Neighbor ID Subtype	Neighbor Port ID	Device Name	System Description	Survival	Operation
--------------------------	------------	--------------------	------------	---------------------	------------------	-------------	--------------------	----------	-----------



No Data

LLDP Neighbor Info

LLDP Statistics

View the LLDP statistics of the local device through this feature. Click on "Refresh" to update the list.

LLDP/LLDP-MED

LLDP Global Settings LLDP MED Network Policy LLDP MED Port Settings Device Info Neighbor Info Statistics

Global Statistics

Insertions	1
Delete	1
Drops	0
Age-Outs	0

Refresh

Clear

Port Statistics

Refresh

Clear

☒	Port	Total Packets Transmitted	Received Frames			Received TLV		Timed-out Neighbors	Operation
			Total	Discarded	Error	Discarded	Unrecognized		
☒	1/0/1	862	0	0	0	0	0	0	
☒	1/0/2	0	0	0	0	0	0	0	
☒	1/0/3	0	0	0	0	0	0	0	
☒	1/0/4	0	0	0	0	0	0	0	
☒	1/0/5	0	0	0	0	0	0	0	

LLDP Statistics

Energy Efficient Ethernet

EEE or **Energy Efficient Ethernet** helps on reducing the power consumption on interfaces like the switch's Ethernet ports, it achieves this by using power only during data transmission.

Navigate to **Maintenance -> Energy Saving Management**, select a port to edit then enable 802.3 EEE.

- **Configuration Status:** shows if the configuration is enabled.
- **Status:** if a supported device is connected to the switch, it will show if it's enabled or not.

Energy Efficient Ethernet

Edit

Refresh

☒	Port	Configuration Status	Status	Operation
☒	1/0/1	Enabled	Enabled	
☐	1/0/2	Enabled	Disabled	
☐	1/0/3	Disabled	Disabled	
☐	1/0/4	Disabled	Disabled	
☐	1/0/5	Disabled	Disabled	

Energy Efficient Ethernet

To enable EEE on a port, select a port then click on **"Edit"** button then toggle ON 802.3 EEE as shown below:

Edit Port



Port

1/0/1

802.3 EEE



Cancel

OK

Energy Efficient Ethernet

Alert

The Alerts section allows administrators to set up alert statuses for different types of system reactions for hardware components, this can be configured based on the component's performance, this can include factors such as CPU Usage, Memory Usage, PoE Power, MAC Address Exceeds Limit, Temperature, Fan Malfunctioning, PoE Chip Malfunctioning...

Alert

[Alert Settings](#)[Statistics](#)

Type	Alert Status	Log Level	Alert Threshold	Alert Waiting Time (s)	Restore Threshold	Restore Waiting Time (s)
CPU Usage	☒	Error	80 %	30	80 %	10
Memory Usage	☒	Error	80 %	30	80 %	10
PoE Power	☒	Error	80 %	30	80 %	10
Mac Address Exceeds Limit	☒	Error	80 %	30	80 %	10
Temperature	☒	Error	77 °C	30	77 °C	10
Fan Malfunction	☒	Error	--	30	--	10
PoE Chip Malfunction	☒	Error	--	30	--	10

Cancel

OK

Alert Settings

Alert Statistics

The statistics section shows the current status of the Hardware components, in addition to some other hardware information, it also displays the last alert time and last restore time of the service

Alert

Alert Settings

Statistics

Refresh

Type	Current Status	Last Alert Time	Last Alert Actual Value	Last Restore Time	Last restore Actual Value	Alert Times
CPU Usage	normal	1970-01-01 08:00:00	0%	1970-01-01 08:00:00	0%	0
Memory Usage	normal	1970-01-01 08:00:00	0%	1970-01-01 08:00:00	0%	0
PoE Power	normal	1970-01-01 08:00:00	0%	1970-01-01 08:00:00	0%	0
Mac Address Exceeds Limit	normal	1970-01-01 08:00:00	0%	1970-01-01 08:00:00	0%	0
Temperature	normal	1970-01-01 08:00:00	0°C	1970-01-01 08:00:00	0°C	0
Fan Malfunction	normal	1970-01-01 08:00:00	--	1970-01-01 08:00:00	--	0
PoE Chip Malfunction	normal	1970-01-01 08:00:00	--	1970-01-01 08:00:00	--	0

Alert Statistics

SYSTEM

Basic Settings

The basic settings page is split into three categories:

- **Basic Info:** first section, the user can specify a name for the switch with a system location and contact.
- **Time Settings:** In this section, the users can configure the time either manually, or using an NTP Server, it's also possible to configure Daylight Saving (DST) Mode according to the location or recurrence.
- **Scheduled Reboot:** the users can enable scheduled reboot by adding a schedule under the [Time Policy](#).

Please navigate to the **System -> Basic Settings** page.

Under Time Settings, **DayLight Saving (DST) Mode** controls daylight-saving adjustment. Recurring mode exposes **Offset (Min)**, **Starting Time**, and **Ending Time**.

Basic Info

★Device Name

GWN7822P

1~64 characters

System Location

Default

0~64 characters

System Contact

Default

0~64 characters

Time Settings

Date & Time

☐ Manual

☒ Automatic (NTP Server)

System Time

2024-10-17 23:08:30

★NTP Server ⓘ

pool.ntp.org

Time Zone

(UTC+08:00) Beijing,Shanghai,Chongqing,Hong Kong,Urum...

DayLight Saving (DST) Mode

Recurring

★Offset (Min)

60

Valid range is 1-1440

★Starting Time

July

Week 1

Sunday

00:00

★Ending Time

December

Week 1

Sunday

00:00

Scheduled Reboot

Reboot Time

Disabled

Cancel

OK

Basic Settings

Basic Info	
Device Name	Specify a name for the device.
System Location	Enter system location.
System Contact	Specify the system contact.
Time Settings	
Date & Time	Select time synchronization method: Manual or Automatic (NTP Server). Manual: specify the time manually. Automatic (NTP Server): time will be synced automatically with NTP Server. Note: if the device is added to the GDMS Networking and Auto Sync Time feature (under Settings -> System) is enabled then the local NTP setting on the device will be disabled. All managed devices will synchronize the time from GDMS Networking.
System Time	If Manual is selected, the user can specify the date and time. If Automatic (NTP Server) is selected, the current time and time will be displayed,
NTP Server	If Date & Time is set to Automatic (NTP Server), please specify the NTP Server address, by default is set to "pool.ntp.org" .
Time Zone	Select the time zone from the drop-down list.
DayLight Saving (DST) Mode	Disabled: DayLight Saving mode will be disabled. Recurring: if the Daylight saving is recurring (repetitive). Non Recurring: if selected the user can specify the offset (min) and daylight saving time start date and end date. Recurring USA: for USA region. Recurring EU: for EU region
Offset (Min)	Specify the Offset by minutes, range from 1 to 1440.
Starting Time	Specify the starting date and time.
Ending Time	Specify the ending date and time.

Scheduled Reboot	
Reboot Time	Select a reboot time from the drop-down list or click on "+" button to add a schedule. By default is disabled.

Basic Settings

Access Control

In this section, the user can configure access to the switch.

Please navigate to **System -> Access Control**.

Web Service Management

On the first tab, the user can configure the following:

- **Inactive Session Timeout (min):** (the range is from 15 seconds to 1440) which is how much time before the switch logs out automatically.
- **HTTPS:** the HTTPS port, by default, is 443, It can be changed if necessary. (it's recommended to keep it 443).
- **Telnet:** can be enabled, but by default is disabled (it's recommended to keep it disabled, it's not secure, and use instead SSH).
- **SSH:** SSH is enabled by default, and it's a better alternative to Telnet, the default port is 22, It can be changed if necessary. (it's recommended to keep it to 22)

Access Control

Web Service Management

SSH Remote Access

Management Platform Settings

Management ACL of Hardware-based

Management ACL of Software-based

Inactive Session Timeout (min)

15

Valid range is 1-1440

HTTPS Port

443

Valid range is 443 and 1024-65535

Telnet

☐

SSH

☒

SSH Port

22

Valid range is 22 and 1024-65535

Cancel

OK

Access Control Web Service Management

VTY (Virtual Teletype) sessions allow remote management of network devices through a command-line interface. The switches support up to 12 simultaneous VTY sessions, enabling concurrent SSH or Telnet access for administrators.

SSH Remote Access

This feature is exclusively used for troubleshooting purposes by our developers and support engineers. When remote access is requested by either party, please enter the current user's password to grant permission to access to the device.

Access Control

Web Service Management

SSH Remote Access

Manager Settings

*Password

Enter login password to access

SSH Remote Access

Access Control SSH Remote Access disabled

Enter the password, then click on the "SSH Remote Access" button, it will be automatically disabled in 48 hours.

Access Control

Web Service Management

SSH Remote Access

Manager Settings



Remote access enabled. It will be automatically disabled in 48 hours.

Disable SSH Remote Access

Access Control SSH Remote Access enabled

Passwordless Remote Access

Passwordless Remote Access lets GDMS Networking (or GWN Manager) open the switch Web UI remotely without prompting for the switch's local username and password. It's meant to simplify remote support and day-to-day management, especially in environments where access is handled through the management platform rather than by sharing device credentials.

To enable it on the switch, log in to the switch Web UI and go to **System -> Access Control**. Open the **Passwordless Remote Access** tab, enable the option, then click **OK** to apply the change.

Access Control

Web Service Management

SSH Remote Access

Passwordless Remote Access

Management Platform Settings

Management ACL

Passwordless Remote Access




Once enabled, GDMS Networking / GWN Manager can remotely access the switch without requiring a username or password.

Cancel

OK

Passwordless Remote Access

From **GDMS Networking**, open the **Devices** page, locate the target switch, and click the **Remote Access** icon in the **Operation** column to launch a proxied Web UI session.

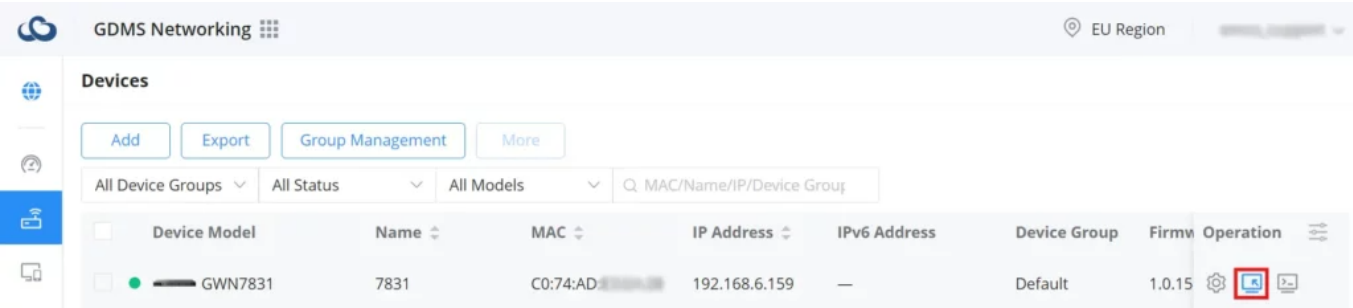

GDMS Remote Access

GDMS will begin establishing the remote access session and display a connection page while the proxy is being created.




Accessing GWN device remotely... Please wait

The access period is 1 hour. If there is no response for a long time, please check again later

Accessing GWN device remotely

Once the session is ready, the switch Web UI opens directly through GDMS without asking for the device password.

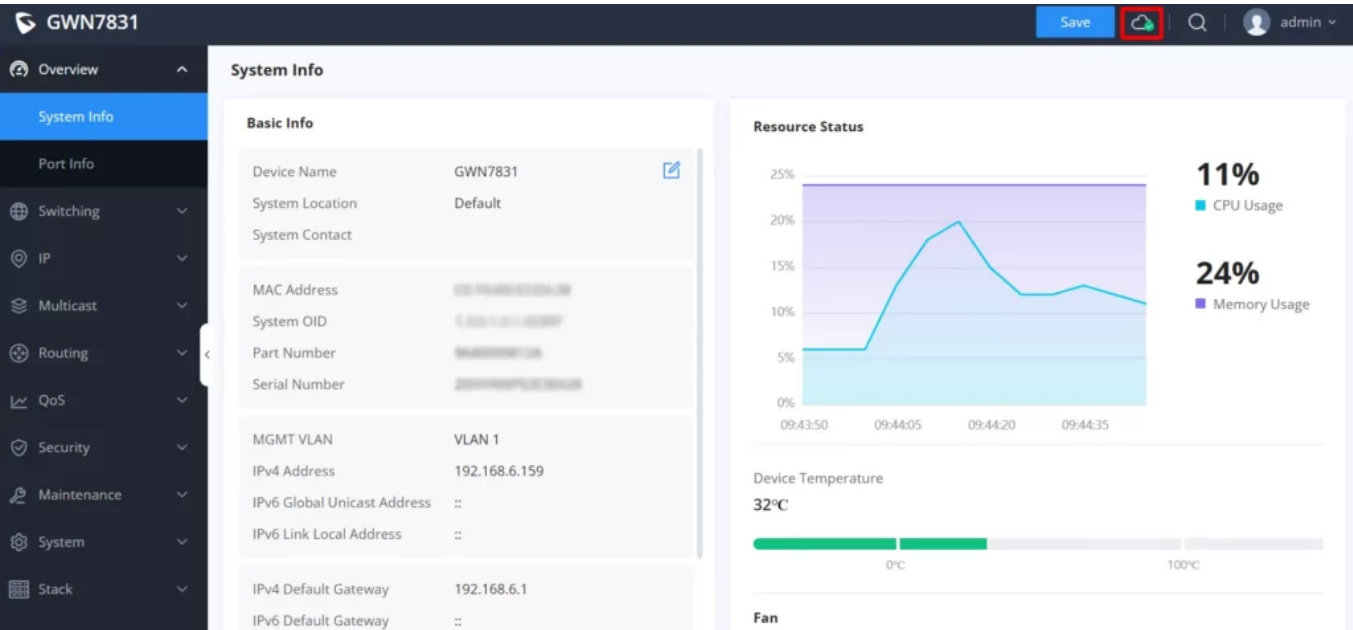

Switch Web UI

Warning: For security, only enable this feature for devices managed under trusted GDMS/GWN Manager accounts, and disable it when you don't need passwordless access.

Management Platform Settings

The **Management Platform Settings** tab controls centralized management. **Allow DHCP Option 43 to Override Management Server** gives a DHCP-provided server address priority over the manually configured address. Enable **Management Server Settings**, select **GWN Manager** or **GWN Router**, enter the **Management Server Address**, and set the **Management Server Port** from 1 to 65535. The default port is 8443.

Access Control

Web Service ManagementSSH Remote AccessManagement Platform SettingsManagement ACL of Hardware-basedManagement ACL of Software-based

Allow DHCP Option 43 to Override Management Server

Management Server Settings

Management Platform

Management Server Address

Management Server Port

Valid range is 1-65535

CancelOK

Access Control Manager Settings

When GWN Manager wants to take over a managed switch, it can force the takeover by entering the switch current password.

Management ACL of Hardware-based

On the switch, the hardware management Access Control List (ACL) is designed to optimize resource efficiency by filtering traffic directly at the hardware level before it reaches the CPU. This pre-processing step ensures that only traffic matching the defined security rules is forwarded for further handling, effectively reducing unnecessary CPU load and enhancing overall performance. By offloading the initial traffic validation to the switch hardware, the switch improves both network efficiency and security.

Access Control

Web Service ManagementSSH Remote AccessManagement Platform SettingsManagement ACL of Hardware-basedManagement ACL of Software-based

Access Control

CancelOK

Rule

After rules added, the system will generate default dropped rules for each set of services and VLAN interfaces of the rules, with the lowest priority

AddDeleteDelete All

Rule ID	Service	Action	IP Address	Mask	VLAN Interface	Operation
No Data						

Management ACL of Hardware based

•Rule ID

1

Valid range is 1-2147483647. The smaller ID is matched first.

•Service

HTTPS

Action

☐ Allow ☒ Drop

•IP Address

192.168.40.1

IPv4 format

Mask ⓘ

255.255.255.0

IPv4 format

•VLAN Interface

1

Cancel

OK

Add a Hardware based ACL Rule

Management ACL of Software-based

On the switch, the software-based Management ACL uses firewall-like rules to control who can access the network and its management features. This means it sets up restrictions to make sure that only authorized users and devices can access important parts of the switch, helping to keep the network secure and well-managed.

•ACL Name

Test_Rule ⓘ

1~64 characters

Rule Settings ⓘ

•Rule ID

1

Valid range is 1-2147483647. The smaller ID is matched first.

Action

☒ Allow ☐ Drop

IPv4 Address/Mask

☒ Any ☐ Custom

IPv6 Address/Prefix Length

☒ Any ☐ Custom

•Service

☐ HTTPS ☐ SSH ☐ Telnet ☐ SNMP

Port

Click on port to select/unselect

Port

2 4 6 8 10 12 14 16 18 20 22 24

1 3 5 7 9 11 13 15 17 19 21 23 25 SFP1 26 SFP2 27 SFP3 28 SFP4

LAG

2 4 6 8

1 3 5 7

Management ACL of Software based

User Management

There are three levels of users, namely administrator, operator and monitor. The administrator authenticates and authorizes users who log in to the switch according to management need where each user has different permissions and passwords.

When adding a local user, enter **Username**, **Password**, and **Confirm Password**, then select the **User Level**

as Operator or Monitor. The confirmation field prevents saving a mistyped password.

1. Administrator

- Each device has one and only one administrator.
- The highest privileges can execute any command.
- The username admin cannot be changed, only the password can be changed.
- Support adding, and deleting operator and monitor.

2. Operator

- Added by an administrator, there can be multiple accounts as Operators.
- The second highest authority can execute all commands except the administrator's key operations and important mandatory commands
- Can't change the username, only the password.
- Support adding, and deleting Monitor users.

All features of admin are allowed except setting management IP address and factory reset.

3. Monitor

- Multiple Monitors are possible with the permission of an Administrator or Operator.
- The lowest authority can only view switch status and statistics without any execution and configuration authority.
- Can't change the username, only the password.

Can only view information.

Click on the "Add" button to add a new user then specify the password and the user level (Operator or Monitor).

The screenshot displays the 'User Management' interface. At the top, there are 'Add' and 'Delete' buttons. Below them is a table with columns 'Username' and 'Level'. The table lists four users: 'admin' (Administrator), 'User1' (Monitor), 'Devs' (Operator), and 'Technician' (Monitor). The 'Add User' modal dialog is open, showing fields for 'Username' (with a hint: '1-64 characters, supports numbers, letters and special characters which contains _@#&'), 'Password' (with a hint: '8-64 characters, must contain two of digits, letters and special characters'), and 'Confirm Password'. The 'User Level' section has two radio buttons: 'Operator' (All features except setting management IP address and factory reset of admin are allowed) and 'Monitor' (Can only view information). The 'Monitor' option is selected. There are 'Cancel' and 'OK' buttons at the bottom of the modal.

Username	Level
admin	Administrator
User1	Monitor
Devs	Operator
Technician	Monitor

Add User

Username
1-64 characters, supports numbers, letters and special characters which contains _@#&

Technician

Password
8-64 characters, must contain two of digits, letters and special characters

Confirm Password

User Level

☐ Operator
All features except setting management IP address and factory reset of admin are allowed

☒ Monitor
Can only view information

Cancel OK

User Management

Time Policy

The time policy page helps to create schedules, for example, Office working hours, Upgrade schedules or Reboot schedules.

To create a schedule, Please navigate to **Web UI -> System -> Time Policy** page, then click on "**Create Policy**" button, there are weekly schedules or absolute Date/Time schedules, for weekly schedules please

select from the table the hours and days and as for absolute Date/Time select the days from the drop-down calendars and times from the drop-down menu. Please refer to the figure below.

Time Policy

+ Create Policy

Upgrade Schedule

Create Policy

If both weekly and absolute schedules are configured on the same day, only the absolute schedule will take effect.

Policy Name

Reboot Schedule

1-64 characters

Weekly

Select All	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
00:00-00:30							
00:30-01:00							
01:00-01:30							
01:30-02:00							
02:00-02:30							
02:30-03:00							
03:00-03:30							
03:30-04:00							
04:00-04:30							
04:30-05:00							
05:00-05:30							

Absolute Date / Time (If no time period is selected on the scheduled date, no service on the corresponding date will be executed.)

Please select date (multiple choices are allowed)

Please select time (multiple choices are allowed)

Add

Cancel


OK

Time Policy

- If both weekly and absolute schedules are configured on the same day, only the absolute schedule will take effect.
- If no time period is selected on the scheduled date, no service on the corresponding date will be executed.

1588v2 TC

IEEE 1588v2 is a protocol for synchronizing clocks, enabling accurate time between nodes in a network. A transparent clock or TC is a type of clock used in IEEE 1588v2 networks and it uses a Precision Time Protocol (PTP) messages to accurately calculate the time. E2E or (End-to-End) transparent clock measures the delay at each network element between the master and slave clocks.

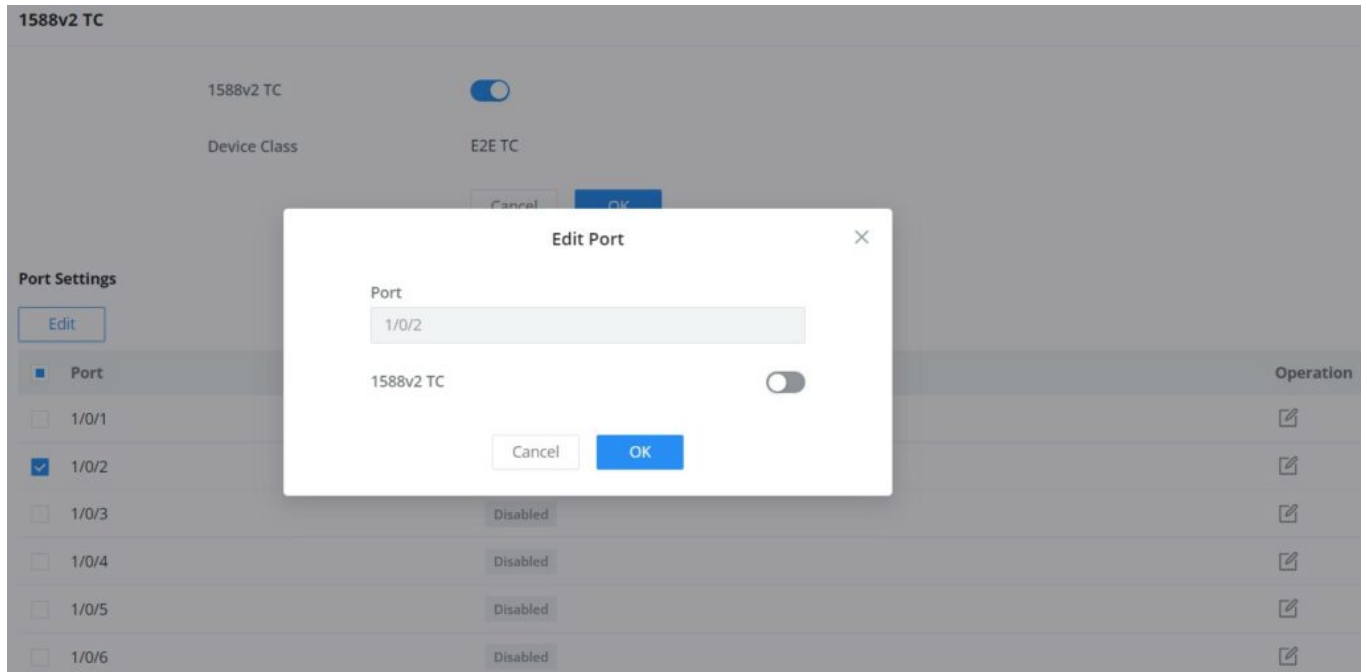

1588v2 TC

This feature is still in Beta, Web only supports E2T TC.

STACK

Stacking allows multiple supported switches to operate as a single logical unit, simplifying network management, increasing redundancy, and expanding port density. This feature is available only on the following models:

Supported Models: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

To access this feature, navigate to:

Web UI -> Stack -> Stack Settings

?? For full configuration examples, topology use cases, and best practices, please refer to the GWN78xx Stacking Feature Guide.

Stack Settings

In this section, you can enable stack mode, assign a device ID and priority, and define the physical ports used for stacking.

Stack Settings

Stack

Device ID 1 Valid range is 1-4

Priority 1 The valid range is 1-255. The higher the value, the higher the priority.

Stack Port 1 1/0/25

Stack Port 2 1/0/26

Cancel OK

Stack Settings

- Stack

Enable or disable stacking functionality.

- When enabled, this device becomes part of a stack group.
- Make sure the ports used are in shutdown status before configuration.
- Only 10G fiber modules are supported.

After setting and saving, reboot the switch to take effect. Cross connect the switches and power them on (it is recommended to power on the preset primary switch first) to form a stacking system.

- Device ID

Unique identifier for the device in the stack.

- Range: **1-4**
- Must be **unique** across all devices in the same stack.

Device ID must be unique, otherwise switch cannot join the stack.

- Priority

Sets the priority level for master election during stack formation.

- Range: **1-255**
- Higher value = higher priority

- Stack Port 1 & Stack Port 2


Select the two physical ports to use for stacking interconnection.

- Must be 10G ports
- Ensure that these ports are correctly cross-connected between switches

After configuring Stack settings, you must click Save and reboot the switch for changes to take effect.

Stack Info

This page displays the current stack topology and status, including member switches and their roles (Master/Member), device IDs, priorities, and port mappings.

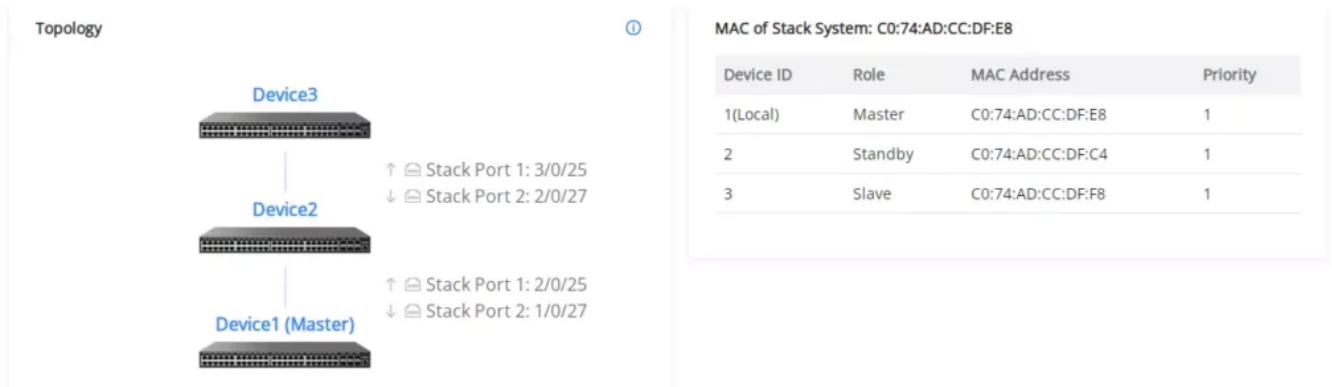

Stack Info

- If no data appears, ensure stack settings are properly configured and devices are connected.
- All stacked switches must be running the same firmware version.

CHANGE LOG

This section documents significant changes from previous versions of this user manual. Only major new features or major document updates are listed here. Minor updates for corrections or editing are not documented here.

Version 1.0.15.137

Product Name: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

- Added Passwordless Remote Access option that allows GDMS Networking / GWN Manager to open the device Web UI remotely without requiring the device username or password. [[Passwordless Remote Access](#)]

Version 1.0.15.135

Product Name: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

- No major changes

Version 1.0.15.132

Product Name: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

- Added support for ignoring credentials during SSH authentication. [[SSH](#)] [[CLI Access](#)]
- Added key for "encrypted" field to configuration files for Radius and TACACS+. [[RADIUS](#)] [[TACACS+](#)] [[CLI Access](#)]

Version 1.0.15.126

Product Name: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

- Added support for switch stacking feature. [[Stack](#)]
- Added the Ability to disable the native VLAN. [[VLAN Port Setting](#)]
- Added support for PVLAN. [[PVLAN](#)]
- Added the option to set the Web GUI language on the configuration. [[Web GUI Languages](#)]
- Added support to use encrypted strings in password fields in CLI. [[RADIUS](#)]

- Added support for "Calling-Station-Id" in RADIUS Access-Request. [[Identity Authentication Management](#)]

Version 1.0.13.18

Product Name: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

- No major changes

Version 1.0.13.6

Product Name: GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.

- Added support for BGP & Route Policy on L3 Switch. [[BGP](#)] [[Route Policy](#)]
- Added LED status change during the start-up process. [[LED Indicators](#)]
- Removed PTP settings from Web UI.
- This is the initial release for GWN7821P/GWN7822P Switches.

Version 1.0.9.15

Product Name: GWN7832

- Added port groups. [[Port Group](#)]
- Added LLDP-based automatic configuration for Auto Voice VLAN mode.
- Added more features for STP, including ignore VLAN in BPDU, root protection and loopback protection. [[Ignore VLAN in BPDU](#)] [[Root Protection](#)] [[Loop Protection](#)]
- Added more OUI in Voice VLAN. [[OUI](#)]
- Added IP configuration for MGMT VLAN. [[MGMT VLAN](#)]
- Added redirect to interface for ACL. [[Redirect to Interface](#)]
- Added VLAN binding to ACL function. [[VLAN Binding to ACL](#)]
- Optimized the rate limit groups from 32 to 128 in ACL. [[Rate Limit Settings](#)]
- Added mask for IPSG/IPv6SG. [[IP Source Guard](#)]
- Added remote-ID configuration based on port for DHCP Snooping. [[DHCP Option 82](#)]
- Changed DHCP's Option 82 Circuit ID/Remote ID. [[DHCP Option 82](#)]
- Added entries fixed for DHCP/DHCPv6 Snooping. [[DHCP Snooping](#)]
- Added flow upgrade via manual upgrade. [[Upgrade Flow](#)]
- Added more settings for logs, including minimum log level and log aggregation. [[Log Aggregation](#)]
- Added Ping watchdog in diagnostics. [[Ping Watchdog](#)]
- Added connection diagnostics of GWN router. [[GWN Router](#)]
- Added RSPAN, including port-based and ACL-based remotely mirroring. [[RSPAN](#)] [[Configuring an ACL based RSPAN](#)]
- Added new SNMP Traps. [[Trap Event](#)]
- Added 802.3bt info in LLDP. [[IEEE 802.3 TLV](#)]
- Added Maintenance Alerts. [[Alert](#)]
- Added management ACL, including hardware-based and software-based management ACL. [[Management ACL of Hardware-based](#)] [[Management ACL of Software-based](#)]
- Added Layer 3 discovery and management by GWN router. [[Management Platform Settings](#)]
- Added ACL for VTY (SSH and telnet). [[Web Service Management](#)]
- Added additional Radius Access-Request Attributes. [[Identity Authentication Management](#)]
- Removed Committed Burst Configuration from Queue Shaping. [[Queue Shaping](#)]
- Added 1588v2 P2P TC. [[1588v2 P2P TC](#)]

- Added NAS-Port-Type value 15 with alternate management VLAN. [[MGMT VLAN](#)]
- Added ability to shutdown port by profile group. [[Port Group](#)]
- Added more port details such as neighbor and PoE power history info. [[Port Info](#)]
- Added more port statistics info. [[Port Statistics](#)]
- Added loopback detection. [[Loopback Detection](#)]
- Added support for QinQ. [[QinQ](#)]
- Added MAC-based VLAN. [[MAC VLAN](#)]
- Added protocol-based VLAN. [[Protocol VLAN](#)]
- Added VLAN translation. [[VLAN translation](#)]
- Added untagged OUI mode for voice VLAN. [[Voice VLAN](#)]
- Added gateway priority when using DHCP to get VLAN IP address [[VLAN IP Interface](#)]
- Added import/export IPSG binding table for IP Source Guard. [[IP Source Guard](#)]
- Added IPv6 Source Guard. [[IPv6 Source Guard](#)]
- Added MAC bypass authentication. [[Identity Authentication Management](#)]
- Added upgrade by FTP and Explicit FTPS. [[FTP](#)] [[Explicit FTPS](#)]
- Added DST mode for time settings. [[DST](#)]
- Added HTTPS/SSH port customization. [[Web Service Management](#)]
- Added GWN Manager takeover function. [[Management Platform Settings](#)]
- Optimized DHCP option 43 settings for DHCP server. [[DHCP Server](#)]
- Optimized routing table. [[Routing Forwarding](#)]
- Added port scheduled enabling feature. [[Scheduled enabled](#)]
- Added DHCPv6 Snooping. [[DHCPv6 Snooping](#)]
- Optimized CPU and memory usage in Web GUI. [[System Info](#)]
- Optimized search for Web GUI. [[Search](#)]

Product Name: GWN7830/GWN7831

- Added port groups. [[Port Group](#)]
- Added LLDP-based automatic configuration for Auto Voice VLAN mode.
- Added more features for STP, including ignore VLAN in BPDU, root protection and loopback protection. [[Ignore VLAN in BPDU](#)] [[Root Protection](#)] [[Loop Protection](#)]
- Added more OUI in Voice VLAN. [[OUI](#)]
- Added IP configuration for MGMT VLAN. [[MGMT VLAN](#)]
- Added redirect to interface for ACL. [[Redirect to Interface](#)]
- Added VLAN binding to ACL function. [[VLAN Binding to ACL](#)]
- Optimized the rate limit groups from 32 to 128 in ACL. [[Rate Limit Settings](#)]
- Added mask for IPSG/IPv6SG. [[IP Source Guard](#)]
- Added remote-ID configuration based on port for DHCP Snooping. [[DHCP Option 82](#)]
- Changed DHCP's Option 82 Circuit ID/Remote ID. [[DHCP Option 82](#)]
- Added entries fixed for DHCP/DHCPv6 Snooping. [[DHCP Snooping](#)]
- Added flow upgrade via manual upgrade. [[Upgrade Flow](#)]
- Added more settings for logs, including minimum log level and log aggregation. [[Log Aggregation](#)]
- Added Ping watchdog in diagnostics. [[Ping Watchdog](#)]
- Added connection diagnostics of GWN router. [[GWN Router](#)]
- Added RSPAN, including port-based and ACL-based remotely mirroring. [[RSPAN](#)] [[Configuring an ACL based RSPAN](#)]

- Added new SNMP Traps. [[Trap Event](#)]
- Added 802.3bt info in LLDP. [[IEEE 802.3 TLV](#)]
- Added Maintenance Alerts. [[Alert](#)]
- Added management ACL, including hardware-based and software-based management ACL. [[Management ACL of Hardware-based](#)] [[Management ACL of Software-based](#)]
- Added Layer 3 discovery and management by GWN router. [[Management Platform Settings](#)]
- Added ACL for VTY (SSH and telnet). [[Web Service Management](#)]
- Added additional Radius Access-Request Attributes. [[Identity Authentication Management](#)]
- Removed Committed Burst Configuration from Queue Shaping. [[Queue Shaping](#)]

Version 1.0.7.71

Product Name: GWN7830/GWN7831

- Optimized search for Web GUI [[Search](#)]
- Optimized CPU and memory usage in Web GUI [[System Info](#)]
- Optimized device IP address display [[System Info](#)]
- Added more port details such as neighbor, PoE power history info [[Port Info](#)]
- Added port scheduled enabling feature [[Port Basic Settings](#)]
- Added more port statistics info [[Port Statistics](#)]
- Added loopback detection feature [[Loopback Detection](#)]
- Added QinQ [[VLAN](#)]
- Optimized trunk port settings [[VLAN Port Members](#)]
- Added MAC-based VLAN [[MAC VLAN](#)]
- Added protocol-based VLAN [[Protocol VLAN](#)]
- Added VLAN translation [[VLAN Port Settings](#)]
- Added default gateway configuration under MGMT VLAN [[VLAN IP Interface](#)]
- Added gateway priority when using DHCP to get VLAN IP address [[VLAN IP Interface](#)]
- Optimized DHCP option 43 configuration for DHCP server [[DHCP Server](#)]
- Added advanced ACL settings, including mirroring, statistics, and priority remapping for a rule [[ACL](#)]
- Added import/export IPSG binding table for IP Source Guard [[IP Source Guard](#)]
- Added IPv6 Source Guard [[IPv6 Source Guard](#)]
- Optimized remote ID and Circuit ID for DHCP Snooping [[DHCP Snooping option 82](#)]
- Added DHCPv6 Snooping [[DHCPv6 Snooping](#)]
- Added upgrade by FTP and Explicit FTPS [[Upgrade](#)]
- Added connection diagnostics with GWN.Cloud/Manager [[Cloud/Manager Connection Diagnostics](#)]
- Optimized EEE [[Energy Efficient Ethernet](#)]
- Added DST mode for time settings [[Basic Settings](#)]
- Added HTTPS/SSH port customization [[Web Service Management](#)]
- Optimized Manager settings [[Manager Settings](#)]
- Added rate limit by ACL binding to VLAN. [[VLAN Binding to ACL](#)]
- Added MAC bypass authentication. [[Local User of MAC-based](#)]
- Add GWN Manager takeover function [[Manager Settings](#)]
- Expanded DHCP leases range up to 11520 min [[DHCP Server](#)]
- Added refresh IP address when using DHCP to get VLAN IP address. [[VLAN IP Interface](#)]
- Added support for OSPFv3. [[OSPFv3](#)]

- Added support for 12 VTY (SSH or telnet) sessions. [[Access Control](#)]
- Added support to see switch clients and other information. [[Port Info](#)]

Version 1.0.3.1

Product Name: GWN7830, GWN7831, GWN7832

- This is the initial release.

Version 1.0.9.15

Product Name: GWN7816(P)

- Added port groups. [[Port Group](#)]
- Added LLDP-based automatic configuration for Auto Voice VLAN mode.
- Added more features for STP, including ignore VLAN in BPDU, root protection and loopback protection. [[Ignore VLAN in BPDU](#)] [[Root Protection](#)] [[Loop Protection](#)]
- Added more OUI in Voice VLAN. [[OUI](#)]
- Added IP configuration for MGMT VLAN. [[MGMT VLAN](#)]
- Added redirect to interface for ACL. [[Redirect to Interface](#)]
- Added VLAN binding to ACL function. [[VLAN Binding to ACL](#)]
- Optimized the rate limit groups from 32 to 128 in ACL. [[Rate Limit Settings](#)]
- Added mask for IPSG/IPv6SG. [[IP Source Guard](#)]
- Added remote-ID configuration based on port for DHCP Snooping. [[DHCP Option 82](#)]
- Changed DHCP's Option 82 Circuit ID/Remote ID. [[DHCP Option 82](#)]
- Added entries fixed for DHCP/DHCPv6 Snooping. [[DHCP Snooping](#)]
- Added flow upgrade via manual upgrade. [[Upgrade Flow](#)]
- Added more settings for logs, including minimum log level and log aggregation. [[Log Aggregation](#)]
- Added Ping watchdog in diagnostics. [[Ping Watchdog](#)]
- Added connection diagnostics of GWN router. [[GWN Router](#)]
- Added RSPAN, including port-based and ACL-based remotely mirroring. [[RSPAN](#)] [[Configuring an ACL based RSPAN](#)]
- Added new SNMP Traps. [[Trap Event](#)]
- Added 802.3bt info in LLDP. [[IEEE 802.3 TLV](#)]
- Added Maintenance Alerts. [[Alert](#)]
- Added management ACL, including hardware-based and software-based management ACL. [[Management ACL of Hardware-based](#)] [[Management ACL of Software-based](#)]
- Added Layer 3 discovery and management by GWN router. [[Management Platform Settings](#)]
- Added ACL for VTY (SSH and telnet). [[Web Service Management](#)]
- Added additional Radius Access-Request Attributes. [[Identity Authentication Management](#)]
- Removed Committed Burst Configuration from Queue Shaping. [[Queue Shaping](#)]
- Added 1588v2 P2P TC. [[1588v2 P2P TC](#)]
- Added NAS-Port-Type value 15 with alternate management VLAN. [[MGMT VLAN](#)]
- Added ability to shutdown port by profile group. [[Port Group](#)]
- Added more port details such as neighbor and PoE power history info. [[Port Info](#)]
- Added more port statistics info. [[Port Statistics](#)]
- Added loopback detection. [[Loopback Detection](#)]
- Added support for QinQ. [[QinQ](#)]
- Added MAC-based VLAN. [[MAC VLAN](#)]

- Added protocol-based VLAN. [[Protocol VLAN](#)]
- Added VLAN translation. [[VLAN translation](#)]
- Added untagged OUI mode for voice VLAN. [[Voice VLAN](#)]
- Added gateway priority when using DHCP to get VLAN IP address. [[VLAN IP Interface](#)]
- Added import/export IPSG binding table for IP Source Guard. [[IP Source Guard](#)]
- Added IPv6 Source Guard. [[IPv6 Source Guard](#)]
- Added MAC bypass authentication. [[Identity Authentication Management](#)]
- Added upgrade by FTP and Explicit FTPS. [[FTP](#)] [[Explicit FTPS](#)]
- Added DST mode for time settings. [[DST](#)]
- Added HTTPS/SSH port customization. [[Web Service Management](#)]
- Added GWN Manager takeover function. [[Management Platform Settings](#)]
- Optimized DHCP option 43 settings for DHCP server. [[DHCP Server](#)]
- Optimized routing table. [[Routing Forwarding](#)]
- Added port scheduled enabling feature. [[Scheduled enabled](#)]
- Added DHCPv6 Snooping. [[DHCPv6 Snooping](#)]
- Optimized CPU and memory usage in Web GUI. [[System Info](#)]
- Optimized search for Web GUI. [[Search](#)]

Product Name: GWN7811(P)/GWN7812P/GWN7813(P)

- Added port groups. [[Port Group](#)]
- Added LLDP-based automatic configuration for Auto Voice VLAN mode.
- Added more features for STP, including ignore VLAN in BPDU, root protection and loopback protection. [[Ignore VLAN in BPDU](#)] [[Root Protection](#)] [[Loop Protection](#)]
- Added more OUI in Voice VLAN. [[OUI](#)]
- Added IP configuration for MGMT VLAN. [[MGMT VLAN](#)]
- Added redirect to interface for ACL. [[Redirect to Interface](#)]
- Added VLAN binding to ACL function. [[VLAN Binding to ACL](#)]
- Optimized the rate limit groups from 32 to 128 in ACL. [[Rate Limit Settings](#)]
- Added mask for IPSG/IPv6SG. [[IP Source Guard](#)]
- Added remote-ID configuration based on port for DHCP Snooping. [[DHCP Option 82](#)]
- Changed DHCP's Option 82 Circuit ID/Remote ID. [[DHCP Option 82](#)]
- Added entries fixed for DHCP/DHCPv6 Snooping. [[DHCP Snooping](#)]
- Added flow upgrade via manual upgrade. [[Upgrade Flow](#)]
- Added more settings for logs, including minimum log level and log aggregation. [[Log Aggregation](#)]
- Added Ping watchdog in diagnostics. [[Ping Watchdog](#)]
- Added connection diagnostics of GWN router. [[GWN Router](#)]
- Added RSPAN, including port-based and ACL-based remotely mirroring. [[RSPAN](#)] [[Configuring an ACL based RSPAN](#)]
- Added new SNMP Traps. [[Trap Event](#)]
- Added 802.3bt info in LLDP. [[IEEE 802.3 TLV](#)]
- Added Maintenance Alerts. [[Alert](#)]
- Added management ACL, including hardware-based and software-based management ACL. [[Management ACL of Hardware-based](#)] [[Management ACL of Software-based](#)]
- Added Layer 3 discovery and management by GWN router. [[Management Platform Settings](#)]
- Added ACL for VTY (SSH and telnet). [[Web Service Management](#)]

- Added additional Radius Access-Request Attributes. [[Identity Authentication Management](#)]
- Removed Committed Burst Configuration from Queue Shaping. [[Queue Shaping](#)]

Version 1.0.7.71

Product Name: GWN7811(P)/GWN7812P/GWN7813(P)

- Optimized search for Web GUI. [[Search](#)]
- Optimized CPU and memory usage in Web GUI. [[System Info](#)]
- Optimized device IP address display. [[System Info](#)]
- Added more port details such as neighbor, PoE power history info. [[Port Info](#)]
- Added port scheduled enabling feature. [[Port Basic Settings](#)]
- Added more port statistics info. [[Port Statistics](#)]
- Added loopback detection. [[Loopback Detection](#)]
- Added support for QinQ. [[VLAN](#)]
- Optimized trunk port settings. [[VLAN Port Members](#)]
- Added MAC-based VLAN. [[MAC VLAN](#)]
- Added protocol-based VLAN. [[Protocol VLAN](#)]
- Added VLAN translation. [[VLAN Port Settings](#)]
- Added default gateway configuration under MGMT VLAN. [[VLAN IP Interface](#)]
- Added gateway priority when using DHCP to get VLAN IP address. [[VLAN IP Interface](#)]
- Optimized DHCP option 43 configuration for DHCP server. [[DHCP Server](#)]
- Added advanced ACL settings, including mirroring, statistics, and priority remapping for a rule. [[ACL](#)]
- Added import/export IPSG binding table for IP Source Guard. [[IP Source Guard](#)]
- Added IPv6 Source Guard. [[IPv6 Source Guard](#)]
- Optimized remote ID and Circuit ID for DHCP Snooping. [[DHCP Snooping option 82](#)]
- Added DHCPv6 Snooping. [[DHCPv6 Snooping](#)]
- Added upgrade by FTP and Explicit FTPS. [[Upgrade](#)]
- Added connection diagnostics with GWN.Cloud/Manager. [[Cloud/Manager Connection Diagnostics](#)]
- Optimized EEE. [[Energy Efficient Ethernet](#)]
- Added DST mode for time settings. [[Basic Settings](#)]
- Added HTTPS/SSH port customization. [[Web Service Management](#)]
- Optimized Manager settings. [[Manager Settings](#)]
- Added rate limit by ACL binding to VLAN. [[VLAN Binding to ACL](#)]
- Added MAC bypass authentication. [[Local User of MAC-based](#)]
- Add GWN Manager takeover function [[Manager Settings](#)]
- Expanded DHCP leases range up to 11520 min. [[DHCP Server](#)]
- Added refresh IP address when using DHCP to get VLAN IP address. [[VLAN IP Interface](#)]
- Added support for OSPFv3. [[OSPFv3](#)]
- Added support for 12 VTY (SSH or telnet) sessions. [[Access Control](#)]
- Added support to see switch clients and other information. [[Port Info](#)]

Version 1.0.3.8

Product Name: GWN7816(P)

- This is the initial release.

Version 1.0.1.20

Product Name: GWN7811(P)/GWN7812P/GWN7813(P)

- Added support for GWN Cloud 1.1.25.23. [[GWN.Cloud](#)]
- Added support of SSH and TELNET in #mode. [[Login Remotely using SSH](#)]
- Added support of Auto Voice VLAN (Dynamic Voice VLAN). [[Voice VLAN](#)]
- Added support of voice VLAN OUI Untagged mode. [[Voice VLAN](#)]
- Added SNTP GWN Cloud interface. [[Time Settings](#)]
- Added support of EXEC CLI config commands by GWN Cloud. [[GWN Cloud - Web CLI](#)]

Version 1.0.1.8

Product Name: GWN7811(P)/GWN7812P/GWN7813(P)

- This is the initial release.